

LEGEND

- Federal Navigation Channel
- Channel Center Line
- Cable or Pipeline Area
- Marine Infrastructure*
- Contour Line
- Obstruction Point
- Fixed Navigation Aids
- Red Navigation Buoy*
- Green Navigation Buoy*
- Yellow Navigation Buoy*
- Red-Green Buoy*
- Shoaling Area
- Shoalest Sounding**

** Shoalest Sounding per Quarter per Reach
* Present at Time of Survey

GRAPHIC SCALE

200 0 200 400

1" = 200' Feet

Notes:

Horizontal Datum: Mass Mainland, MA-2001 NAD 83
Distance Units: U.S. Survey Feet
Vertical Datum: MLLW
Depth Units: U.S. Survey Feet
Vessel Name: Celestial
Sonar System: R2 Sonic 2024 (Multibeam Sonar)
Sounding Frequency: 300 kHz
Survey Method: RTK GPS TIDES
GPS_System: Applanix POS MV (RTK)
RTK Base Station: MTS Smartnet Imax
Software Used: Hypack
Sounding Sort Distance: 50'
Field Books: R&H 4985
Survey No.: MA_26_20260122_CS_001
Reference NOAA Chart No.: US5BOSBE, US5MA1OF

The information depicted on these charts represents the results of surveys made on the dates indicated, and can only be considered as indicating the conditions existing at that time.

General Notes

The sounding information shown on this map represents the SHOALEST soundings of those obtained from hydrographic surveys conducted during January 2026. The positions of aids to navigation were located during survey operations, are provided for information only and should not be used for navigation. Orthoimagery is from a variety of sources and dates and is intended to portray general characteristics of the shoreline and other features. Temporal changes may have occurred since this dataset was collected and some parts may no longer be an accurate representation of the conditions. The information depicted on this map should NOT be used to determine volumes as volumes are determined from more sounding information than shown.

Project Remarks

None.

Water Level Information

Tides were recorded using RTK GPS. NAVD88 to MLLW corrections were logged utilizing NOAA's V-Datum regional model ME/NH/MA Region Version 2.3. The corrections in the project area range from 5.29 feet to 5.61 feet. MLLW is below NAVD88; therefore, the correction should be added to NAVD88 to convert to MLLW (e.g.-10 NAV88 = -8 MLLW when using a 2-foot correction).

DISCLAIMER
Access Constraints: The United States Government furnishes these data and information with the understanding that the US Government makes no warranties, expressed or implied concerning the accuracy, completeness, reliability, or suitability for any particular purpose of the information and the data furnished. The United States shall be under no liability whatsoever to any individual or party for any action made thereof. These data belong to the Government. Therefore the recipient fully agrees not to represent these data to anyone as other than government data. The recipient shall not transfer these data to others without also transferring this Disclaimer.

Distribution Liability: The data represents the results of data collected during a specific survey conducted by the Corps of Engineers activity and indicates the general existing conditions. As a result, the data may not be suitable for other purposes. The user is responsible for the results of any of the application of this data for other than its intended purpose.

US Army Corps of Engineers
District: CENAE

U.S. ARMY CORPS OF ENGINEERS
NEW ENGLAND DISTRICT

SURVEYED BY: AJD
CHECKED BY: ZSM
ISSUE DATE: 1/29/2026
SUBMITTED BY: Joshua Bromberg
APPROVED BY: NAE Survey
SIZE: ANSI D
MAP DOCUMENT: MA_26_WEY_20260122_CS_001

WEYMOUTH FORE AND TOWN RIVERS
WEYMOUTH, QUINCY, AND HULL, MASSACHUSETTS
CONDITION SURVEY


15 AND 35-FOOT CHANNELS
35-FOOT TURNING BASINS AND MANEUVERING AREA

File Name: MA_26_WEY_20260122_CS_001

SHEET IDENTIFICATION
Weymouth Fore and Town Rivers
Sheet 6 of 10

Revision Number: 5.24.09.03-5.24.09.03



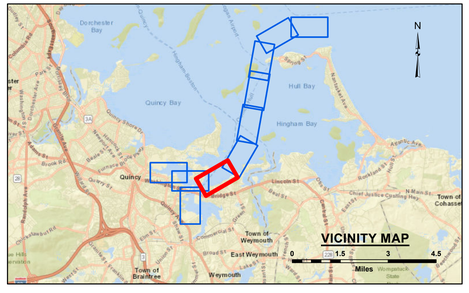

LEGEND

- Federal Navigation Channel
- Channel Center Line
- Cable or Pipeline Area
- Marine Infrastructure*
- Contour Line
- Obstruction Point
- Fixed Navigation Aids
- Red Navigation Buoy*
- Green Navigation Buoy*
- Yellow Navigation Buoy*
- Red-Green Buoy*
- Shoaling Area
- Shoalest Sounding**

** Shoalest Sounding per Quarter per Reach
* Present at Time of Survey

GRAPHIC SCALE

200 0 200 400

1" = 200' Feet

Notes:

Horizontal Datum: Mass Mainland, MA-2001 NAD 83
Distance Units: U.S. Survey Feet
Vertical Datum: MLLW
Depth Units: U.S. Survey Feet
Vessel Name: Celestial
Sonar System: R2 Sonic 2024 (Multibeam Sonar)
Sounding Frequency: 300 kHz
Survey Method: RTK GPS TIDES
GPS_System: Applanix POS MV (RTK)
RTK Base Station: MTS Smartnet Imax
Software Used: Hypack
Sounding Sort Distance: 50'
Field Books: R&H 4985
Survey No.: MA_26_20260122_CS_001
Reference NOAA Chart No.: US5BOSBE, US5MA1OF

The information depicted on these charts represents the results of surveys made on the dates indicated, and can only be considered as indicating the conditions existing at that time.

General Notes

The sounding information shown on this map represents the SHOALEST soundings of those obtained from hydrographic surveys conducted during January 2026. The positions of aids to navigation were located during survey operations, are provided for information only and should not be used for navigation. Orthoimagery is from a variety of sources and dates and is intended to portray general characteristics of the shoreline and other features. Temporal changes may have occurred since this dataset was collected and some parts may no longer be an accurate representation of the conditions. The information depicted on this map should NOT be used to determine volumes as volumes are determined from more sounding information than shown.

Project Remarks

None.

Water Level Information

Tides were recorded using RTK GPS. NAVD88 to MLLW corrections were logged utilizing NOAA's V-Datum regional model ME/NH/MA Region Version 2.3. The corrections in the project area range from 5.29 feet to 5.61 feet. MLLW is below NAVD88; therefore, the correction should be added to NAVD88 to convert to MLLW (e.g.-10 NAV88 = -8 MLLW when using a 2-foot correction).

US Army Corps of Engineers
District: CENAE

Distribution Liability: The data represents the results of data collected by the U.S. Army Corps of Engineers, New England District and indicates the general existing conditions. Engineers activity and indicates the general existing conditions. The data was collected using standard survey methods and is subject to standard survey accuracies. The user is responsible for the results of any of the application of this data for other than its intended purpose.

DISCLAIMER
Access Constraints: The United States Government furnishes this map and geographic data and related graphic material on an "as is" basis and the user assumes all responsibility for the use thereof, understanding that the US Government makes no warranties, expressed or implied concerning the accuracy, completeness, reliability, currentness, or suitability of any information provided. The user is responsible for verifying the accuracy of the information and the data furnished. The United States shall be under no liability whatsoever to any person by reason of any use made thereof. These data belong to the Government. Therefore the recipient fully agrees not to represent these data to anyone as other than Government data. The recipient shall not transfer these data to others without also transferring this Disclaimer.

U.S. ARMY CORPS OF ENGINEERS
NEW ENGLAND DISTRICT

SUBMITTED BY: Joshua Bromberg
APPROVED BY: NAE Survey
SURVEYED BY: AJD
CHECKED BY: ZSM
ISSUE DATE: 1/29/2026
SIZE: ANSI D
MAP DOCUMENT: MA_26_WEY_20260122_CS_001


WEYMOUTH FORE AND TOWN RIVERS
WEYMOUTH, QUINCY, AND HULL, MASSACHUSETTS
CONDITION SURVEY


15 AND 35-FOOT CHANNELS
35-FOOT TURNING BASINS AND MANEUVERING AREA

File Name: MA_26_WEY_20260122_CS_001

SHEET IDENTIFICATION
Weymouth Fore and Town Rivers
Sheet 7 of 10

Revision Number: 5.24.09.03-5.24.09.03

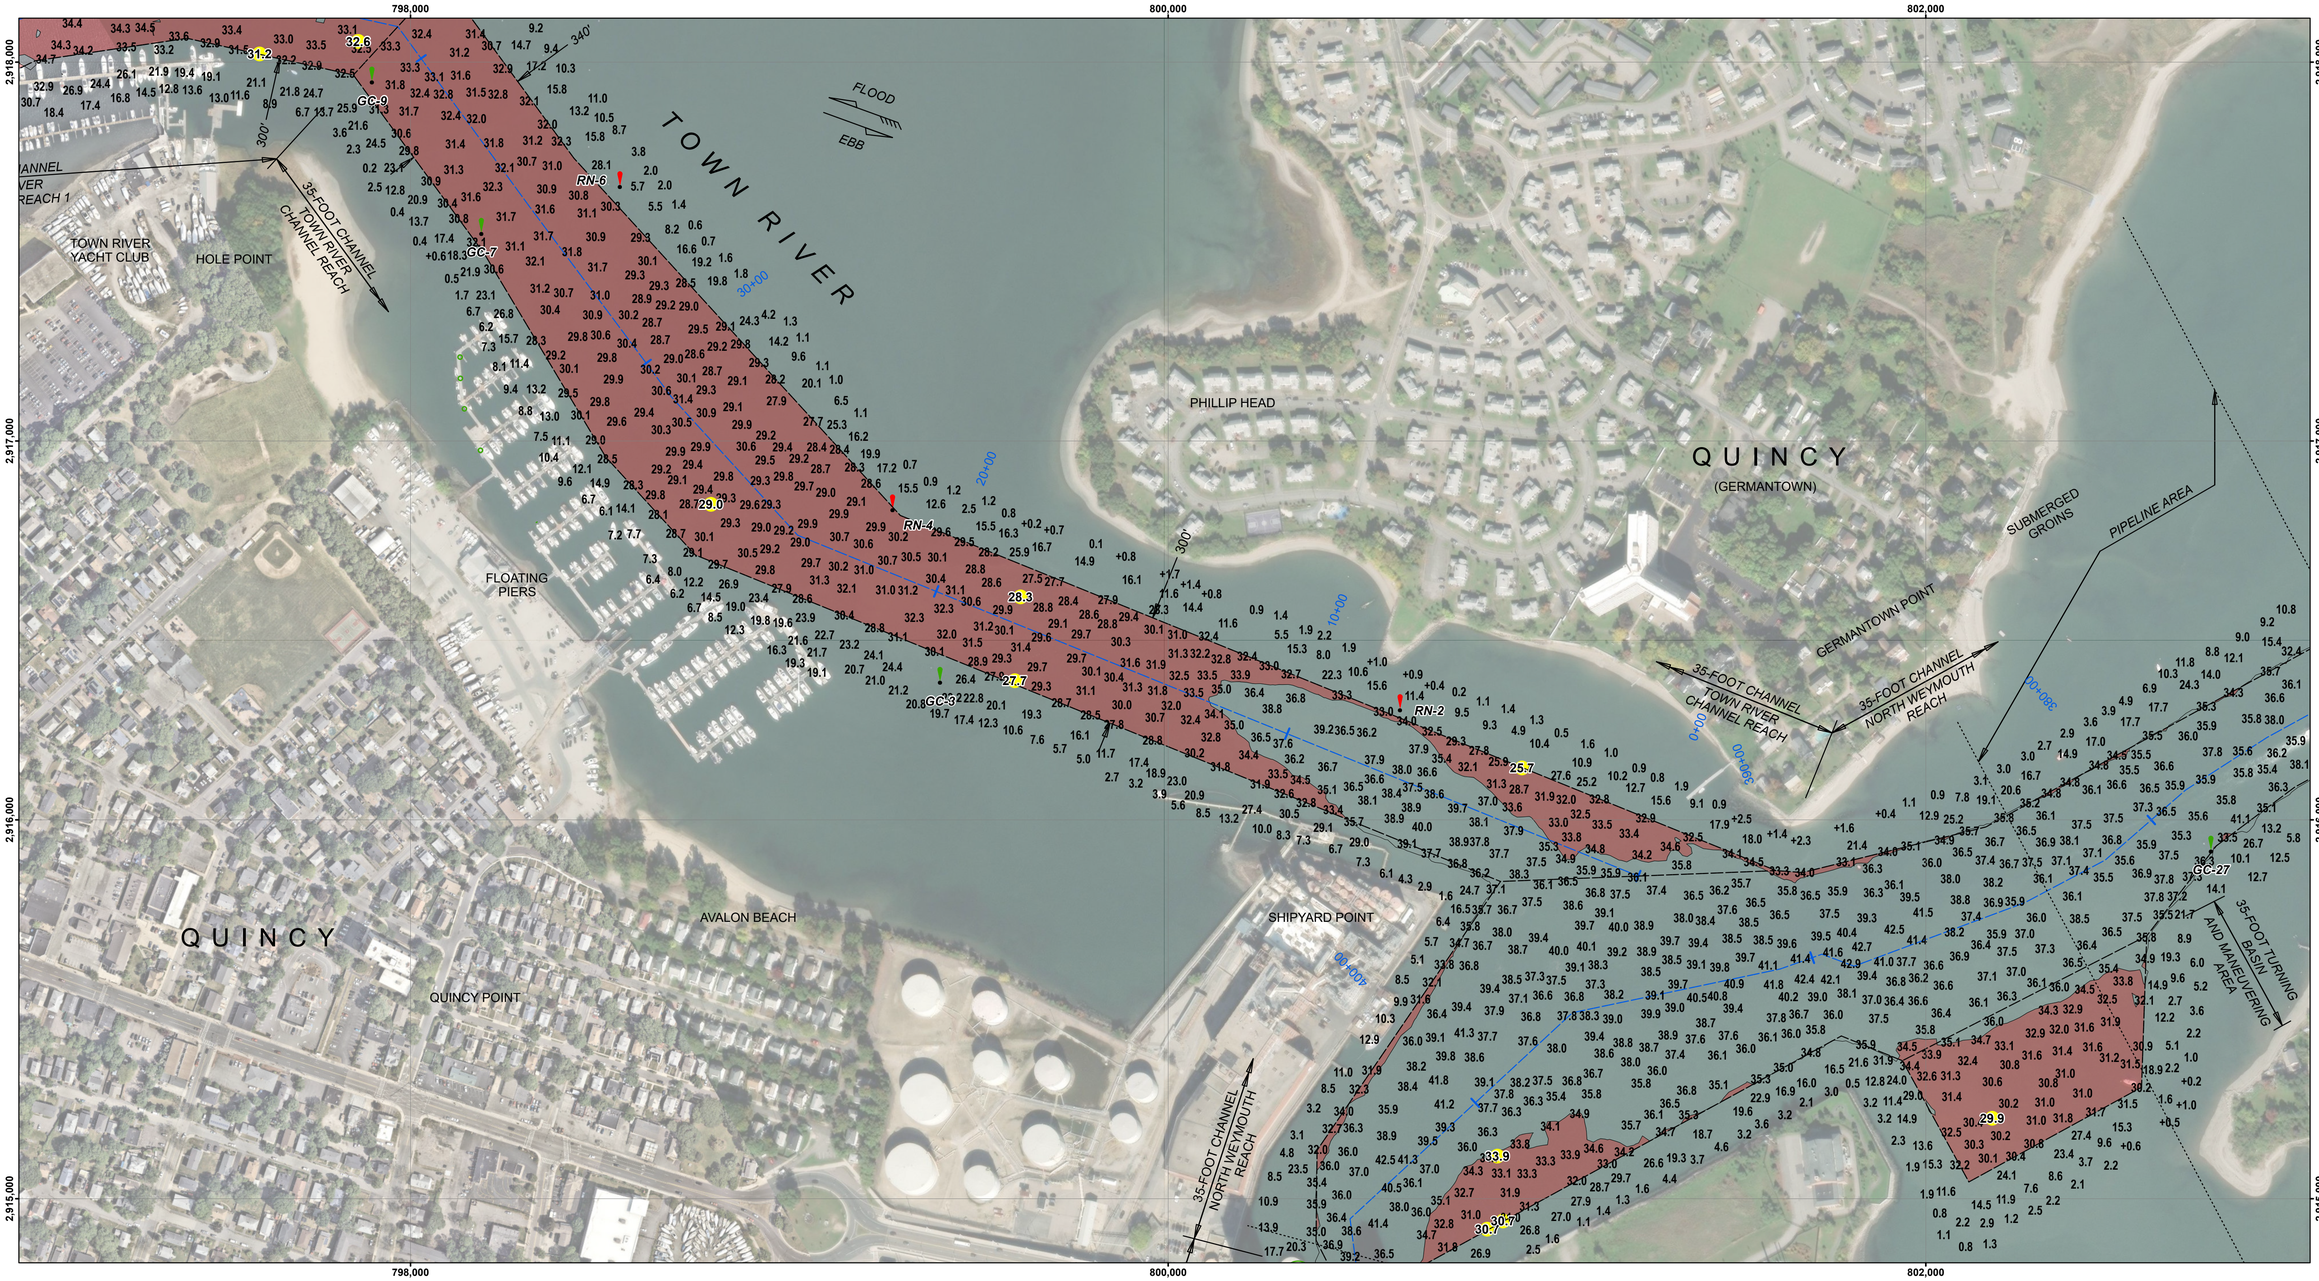

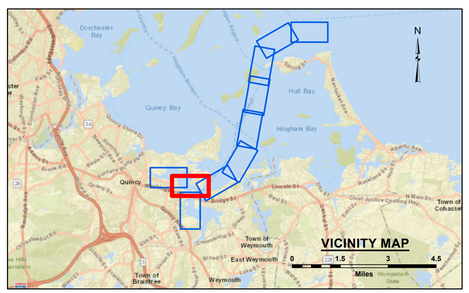

LEGEND

- Federal Navigation Channel
- Channel Center Line
- Cable or Pipeline Area
- Marine Infrastructure*
- Contour Line
- Obstruction Point
- Fixed Navigation Aids
- Red Navigation Buoy*
- Green Navigation Buoy*
- Yellow Navigation Buoy*
- Red-Green Buoy*
- Shoaling Area
- Shoalest Sounding**

** Shoalest Sounding per Quarter per Reach
* Present at Time of Survey

GRAPHIC SCALE

200 0 200 400

1" = 200' Feet

N W E S

Notes:

Horizontal Datum: Mass Mainland, MA-2001 NAD 83
Distance Units: U.S. Survey Feet
Vertical Datum: MLLW
Depth Units: U.S. Survey Feet
Vessel Name: Celestial
Sonar System: R2 Sonic 2024 (Multibeam Sonar)
Sounding Frequency: 300 kHz
Survey Method: RTK GPS TIDES
GPS_System: Applanix POS MV (RTK)
RTK Base Station: MTS Smartnet Imax
Software Used: Hypack
Sounding Sort Distance: 50'
Field Books: R&H 4985
Survey No.: MA_26_20260122_CS_001
Reference NOAA Chart No.: US5BOSBE, US5MA1OF

The information depicted on these charts represents the results of surveys made on the dates indicated, and can only be considered as indicating the conditions existing at that time.

General Notes

The sounding information shown on this map represents the SHOALEST soundings of those obtained from hydrographic surveys conducted during January 2026. The positions of aids to navigation were located during survey operations, are provided for information only and should not be used for navigation. Orthoimagery is from a variety of sources and dates and is intended to portray general characteristics of the shoreline and other features. Temporal changes may have occurred since this dataset was collected and some parts may no longer be an accurate representation of the conditions. The information depicted on this map should NOT be used to determine volumes as volumes are determined from more sounding information than shown.

Project Remarks

None.

Water Level Information

Tides were recorded using RTK GPS. NAVD88 to MLLW corrections were logged utilizing NOAA's V-Datum regional model ME/NH/MA Region Version 2.3. The corrections in the project area range from 5.29 feet to 5.61 feet. MLLW is below NAVD88; therefore, the correction should be added to NAVD88 to convert to MLLW (e.g.-10 NAV88 = -8 MLLW when using a 2-foot correction).

US Army Corps of Engineers
District: CENAE

Distribution Liability: The data represents the results of data collection and analysis performed by the Corps of Engineers activity and indicates the general existing conditions. The user is responsible for determining the suitability of the data for their purposes. The user is responsible for the results of any of the application of this data for other than its intended purpose.

DISCLAIMER
Access Constraints: The United States Government furnishes this map and the data contained therein. The user agrees by understanding that the US Government makes no warranties, representations or guarantees, either expressed or implied concerning the accuracy, completeness, reliability, or suitability of the information and the data furnished. The United States shall be under no liability whatsoever to any person by reason of any use made thereof. These data belong to the Government. Therefore the recipient fully agrees not to represent these data to anyone as other than Government data. The recipient also agrees to hold these data to others without also transferring this Disclaimer.

U.S. ARMY CORPS OF ENGINEERS
NEW ENGLAND DISTRICT

SUBMITTED BY: Joshua Bromberg
APPROVED BY: NAE Survey
SURVEYED BY: AJD
CHECKED BY: ZSM
ISSUE DATE: 1/29/2026
SIZE: ANSI D
MAP DOCUMENT: MA_26_WEY_20260122_CS_001


WEYMOUTH FORE AND TOWN RIVERS
WEYMOUTH, QUINCY, AND HULL, MASSACHUSETTS
CONDITION SURVEY


15 AND 35-FOOT CHANNELS
35-FOOT TURNING BASINS AND MANEUVERING AREA

File Name: **MA_26_WEY_20260122_CS_001**

SHEET IDENTIFICATION
Weymouth Fore and Town Rivers
Sheet 8 of 10

Revision Number: 5.24.09.03-5.24.09.03

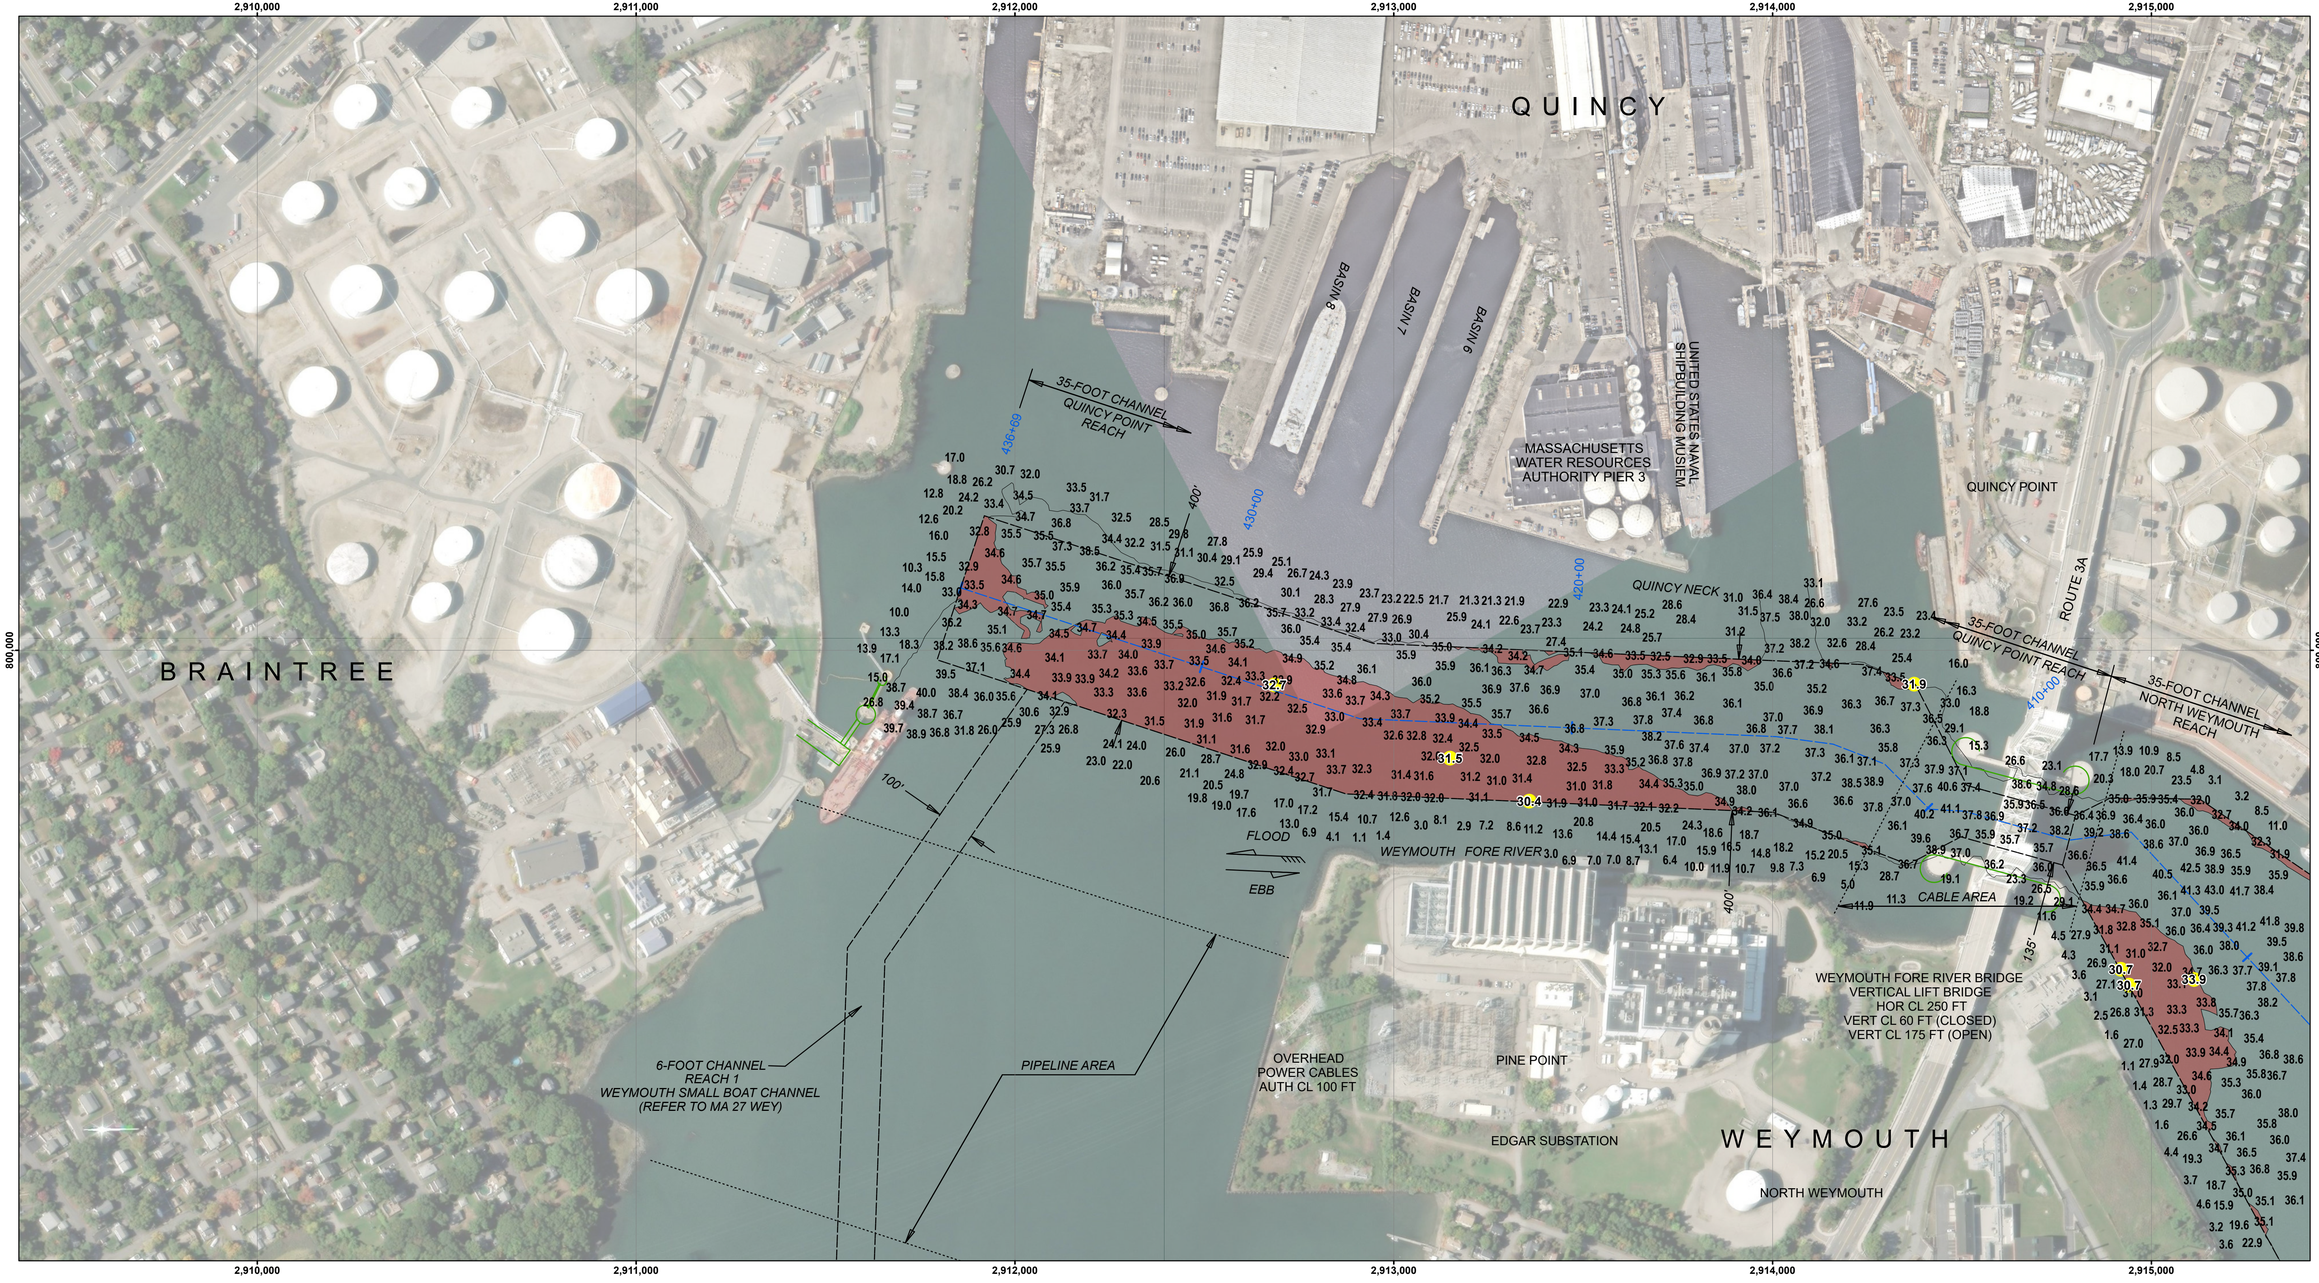

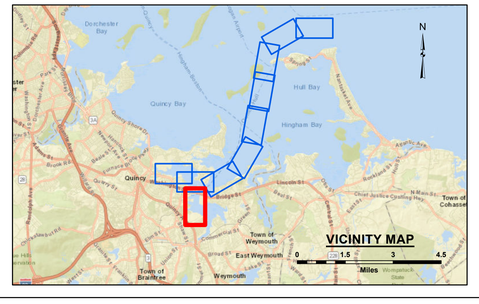

LEGEND

- Federal Navigation Channel
- Channel Center Line
- Cable or Pipeline Area
- Marine Infrastructure*
- Contour Line
- Obstruction Point
- Fixed Navigation Aids
- Red Navigation Buoy*
- Green Navigation Buoy*
- Yellow Navigation Buoy*
- Red-Green Buoy*
- Shoaling Area
- Shoalest Sounding**

** Shoalest Sounding per Quarter per Reach
* Present at Time of Survey

GRAPHIC SCALE

200 0 200 400

1" = 200' Feet

Notes:

Horizontal Datum: Mass Mainland, MA-2001 NAD 83
Distance Units: U.S. Survey Feet
Vertical Datum: MLLW
Depth Units: U.S. Survey Feet
Vessel Name: Celestial
Sonar System: R2 Sonic 2024 (Multibeam Sonar)
Sounding Frequency: 300 kHz
Survey Method: RTK GPS TIDES
GPS_System: Applanix POS MV (RTK)
RTK Base Station: MTS Smartnet Imax
Software Used: Hypack
Sounding Sort Distance: 50'
Field Books: R&H 4985
Survey No.: MA_26_20260122_CS_001
Reference NOAA Chart No.: US5BOSBE, US5MA1OF

The information depicted on these charts represents the results of surveys made on the dates indicated, and can only be considered as indicating the conditions existing at that time.

General Notes

The sounding information shown on this map represents the SHOALEST soundings of those obtained from hydrographic surveys conducted during January 2026. The positions of aids to navigation were located during survey operations, are provided for information only and should not be used for navigation. Orthoimagery is from a variety of sources and dates and is intended to portray general characteristics of the shoreline and other features. Temporal changes may have occurred since this dataset was collected and some parts may no longer be an accurate representation of the conditions. The information depicted on this map should NOT be used to determine volumes as volumes are determined from more sounding information than shown.

Project Remarks

None.

Water Level Information

Tides were recorded using RTK GPS. NAVD88 to MLLW corrections were logged utilizing NOAA's V-Datum regional model ME/NH/MA Region Version 2.3. The corrections in the project area range from 5.29 feet to 5.61 feet. MLLW is below NAVD88; therefore, the correction should be added to NAVD88 to convert to MLLW (e.g.-10 NAV88 = -8 MLLW when using a 2-foot correction).

US Army Corps of Engineers
District: CENAE

DISCLAIMER
Access Constraints: The United States Government furnishes this map and the data contained therein to expedite Engineers activity and indicates the general existing conditions. understanding that the US Government makes no warranties, Engineers activity and indicates the general existing conditions. represented or implied concerning the accuracy, completeness Engineers activity and indicates the general existing conditions. or suitability of the information for any particular purpose. By using the information and the data furnished. The United States shall be accuracy specifications. The user is responsible for the results made thereof. These data belong to the Government. Therefore the of any of the application of this data for other than its intended purpose. recipient fully agrees not to represent these data to anyone as other than data furnished by the Government and to indemnify the Government these data to others without also transferring this Disclaimer.

Distribution Liability: The data represents the results of data

U.S. ARMY CORPS OF ENGINEERS
NEW ENGLAND DISTRICT

SUBMITTED BY: Joshua Bromberg
APPROVED BY: NAE Survey
SURVEYED BY: AJD
CHECKED BY: ZSM
ISSUE DATE: 1/29/2026
SIZE: ANSI D
MAP DOCUMENT: MA_26_WEY_20260122_CS_001


WEYMOUTH FORE AND TOWN RIVERS
WEYMOUTH, QUINCY, AND HULL, MASSACHUSETTS
CONDITION SURVEY


15 AND 35-FOOT CHANNELS
35-FOOT TURNING BASINS AND MANEUVERING AREA

File Name: MA_26_WEY_20260122_CS_001

SHEET IDENTIFICATION
Weymouth Fore and Town Rivers
Sheet 9 of 10

Revision Number: 5.24.09.03-5.24.09.03

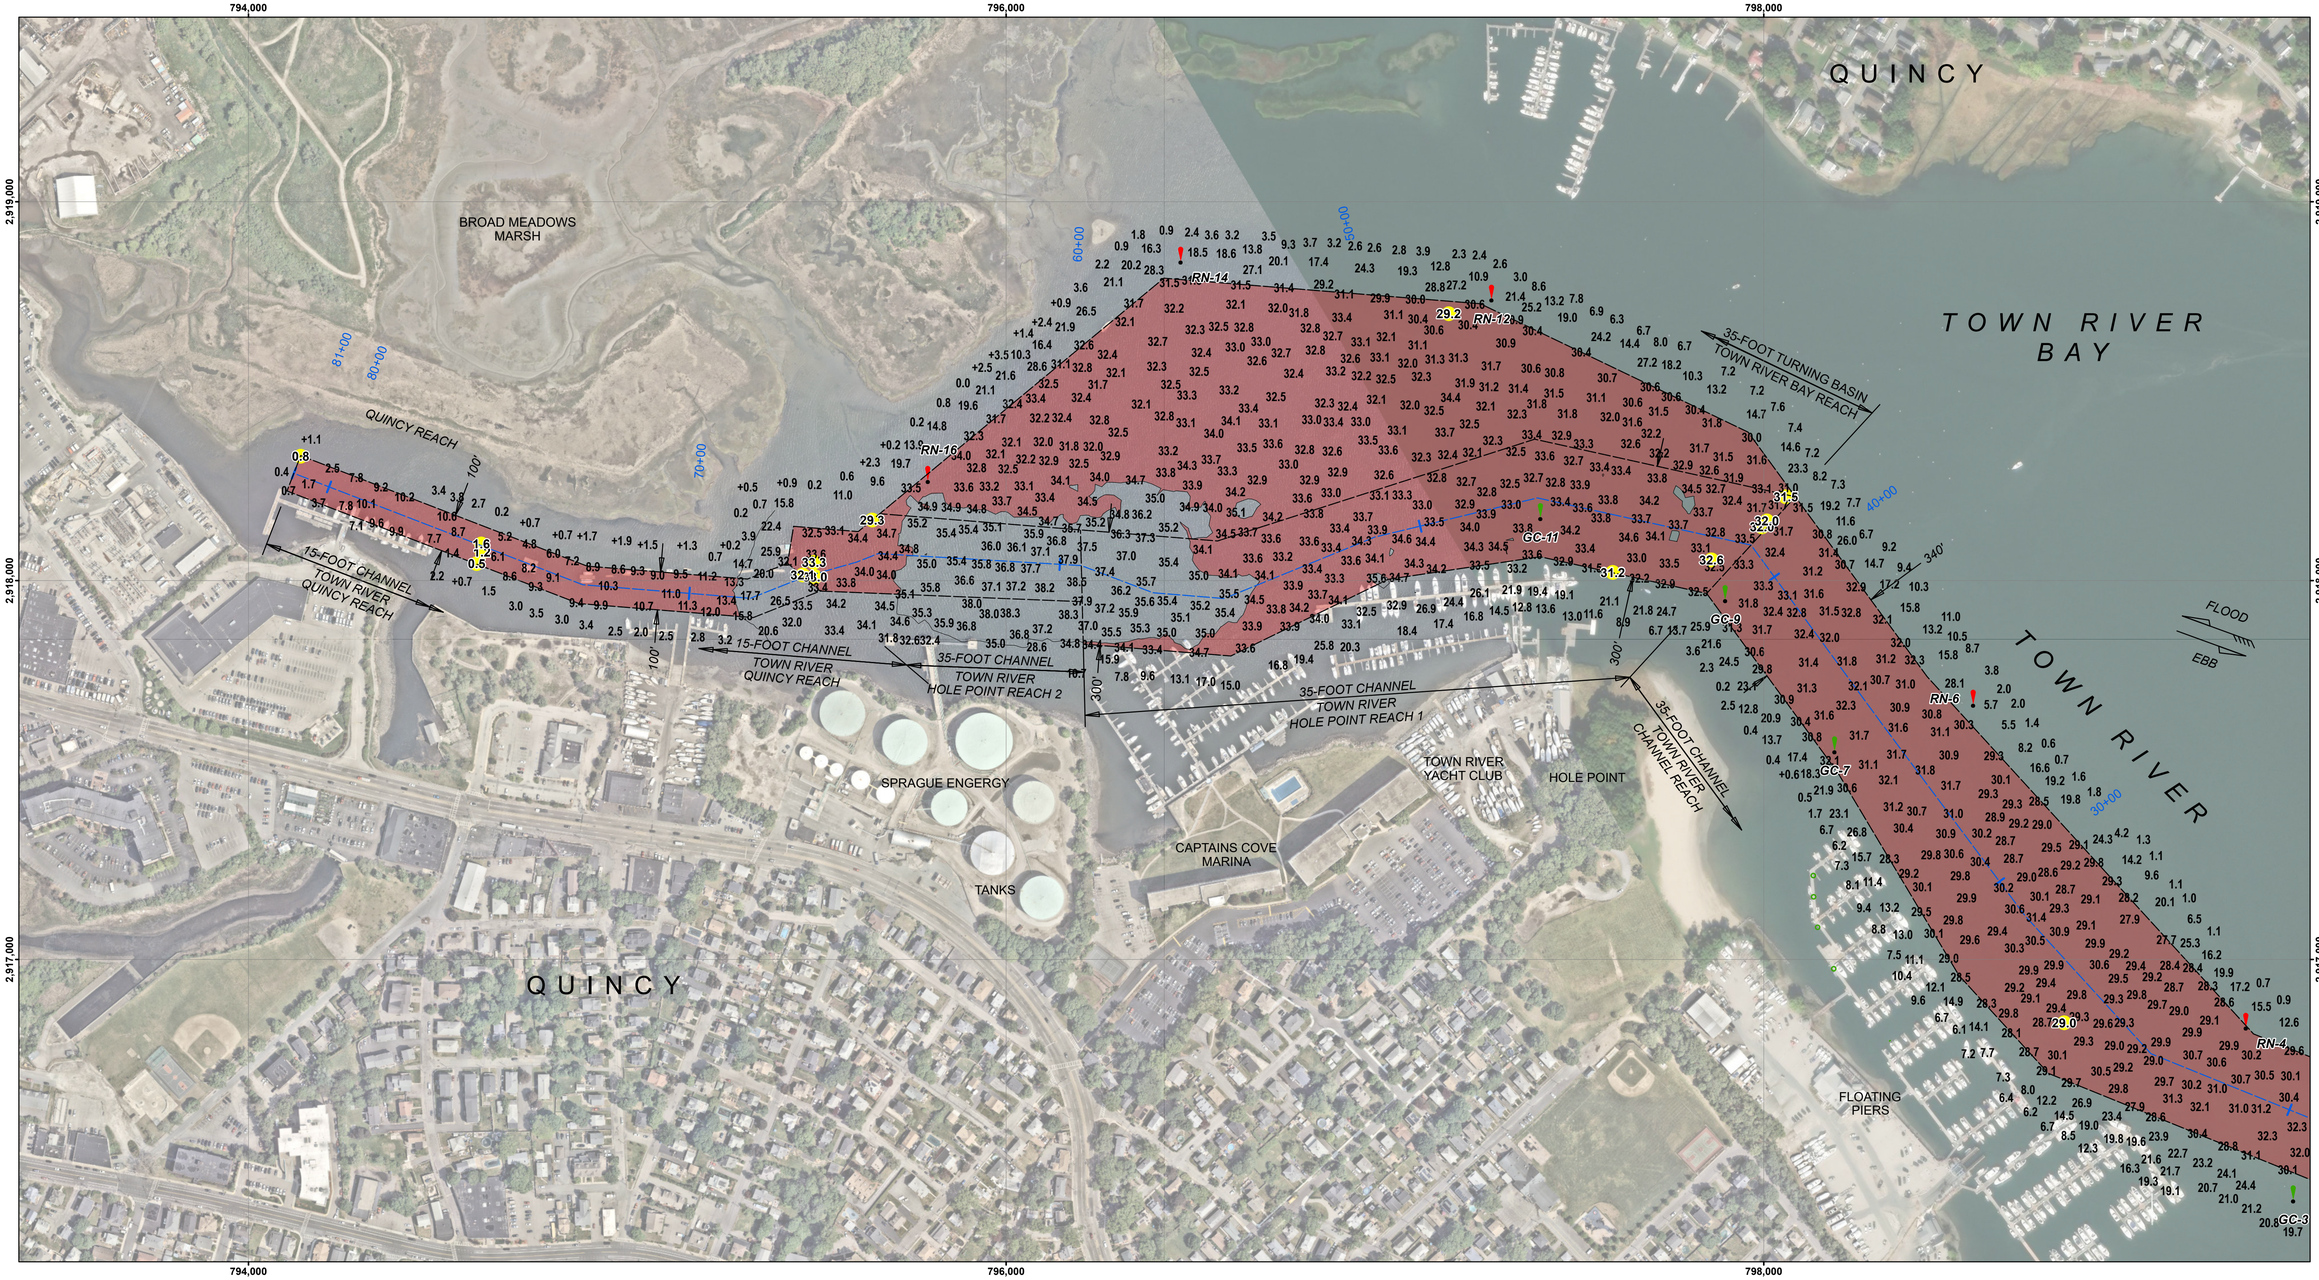

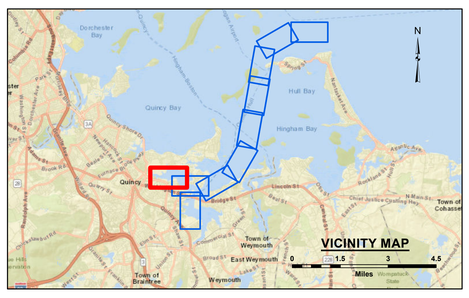

LEGEND

- Federal Navigation Channel
- Channel Center Line
- Cable or Pipeline Area
- Marine Infrastructure*
- Contour Line
- Obstruction Point
- Fixed Navigation Aids
- Red Navigation Buoy*
- Green Navigation Buoy*
- Yellow Navigation Buoy*
- Red-Green Buoy*
- Shoaling Area
- Shoalest Sounding**

** Shoalest Sounding per Quarter per Reach
* Present at Time of Survey

GRAPHIC SCALE
200 0 200 400
1" = 200' Feet

N W E S

Notes:
Horizontal Datum: Mass Mainland, MA-2001 NAD 83
Distance Units: U.S. Survey Feet
Vertical Datum: MLLW
Depth Units: U.S. Survey Feet
Vessel Name: Celestial
Sonar System: R2 Sonic 2024 (Multibeam Sonar)
Sounding Frequency: 300 kHz
Survey Method: RTK GPS TIDES
GPS_System: Applanix POS MV (RTK)
RTK Base Station: MTS Smartnet Imax
Software Used: Hypack
Sounding Sort Distance: 50'
Field Books: R&H 4985
Survey No.: MA_26_20260122_CS_001
Reference NOAA Chart No.: US5BOSBE, US5MA1OF

The information depicted on these charts represents the results of surveys made on the dates indicated, and can only be considered as indicating the conditions existing at that time.

General Notes
The sounding information shown on this map represents the SHOALEST soundings of those obtained from hydrographic surveys conducted during January 2026. The positions of aids to navigation were located during survey operations, are provided for information only and should not be used for navigation. Orthoimagery is from a variety of sources and dates and is intended to portray general characteristics of the shoreline and other features. Temporal changes may have occurred since this dataset was collected and some parts may no longer be an accurate representation of the conditions. The information depicted on this map should NOT be used to determine volumes as volumes are determined from more sounding information than shown.

Project Remarks
None.

Water Level Information
Tides were recorded using RTK GPS. NAVD88 to MLLW corrections were logged utilizing NOAA's V-Datum regional model ME/NH/MA Region Version 2.3. The corrections in the project area range from 5.29 feet to 5.61 feet. MLLW is below NAVD88; therefore, the correction should be added to NAVD88 to convert to MLLW (e.g.-10 NAV88 = -8 MLLW when using a 2-foot correction).

US Army Corps of Engineers
District: CENAE

DISCLAIMER
Access Constraints: The United States Government furnishes this map/chart/publication/data/report "as is" without express understanding that the US Government makes no warranties, represented or implied concerning the accuracy, completeness reliability, usability, or suitability for any particular purpose of the information and the data furnished. The United States shall be under no liability whatsoever to any person by reason of any use made thereof. These data belong to the Government. Therefore the recipient fully agrees not to represent these data to anyone as other than Government data. The recipient agrees to hold the United States harmless from any damages resulting from the use of these data to others without also transferring this Disclaimer.

Distribution Liability: The data represents the results of data collection and analysis performed by the U.S. Army Corps of Engineers activity and indicates the general existing conditions. Limitations of the data are described in the publication and it is the user's responsibility to be aware of such limitations. The user is responsible for the results of any of the application of this data for other than its intended purpose.

U.S. ARMY CORPS OF ENGINEERS
NEW ENGLAND DISTRICT

SURVEYED BY: AJD
CHECKED BY: ZSM
ISSUE DATE: 1/29/2026
SUBMITTED BY: Joshua Bromberg
APPROVED BY: NAE Survey
SIZE: ANSI D
MAP DOCUMENT: MA_26_WEY_20260122_CS_001

WEYMOUTH FORE AND TOWN RIVERS
WEYMOUTH, QUINCY, AND HULL, MASSACHUSETTS
CONDITION SURVEY

15 AND 35-FOOT CHANNELS,
35-FOOT TURNING BASINS AND MANEUVERING AREA.

File Name: MA_26_WEY_20260122_CS_001

SHEET IDENTIFICATION
Weymouth Fore and Town Rivers
Sheet 10 of 10

Revision Number: 5.24.09.03-5.24.09.03