
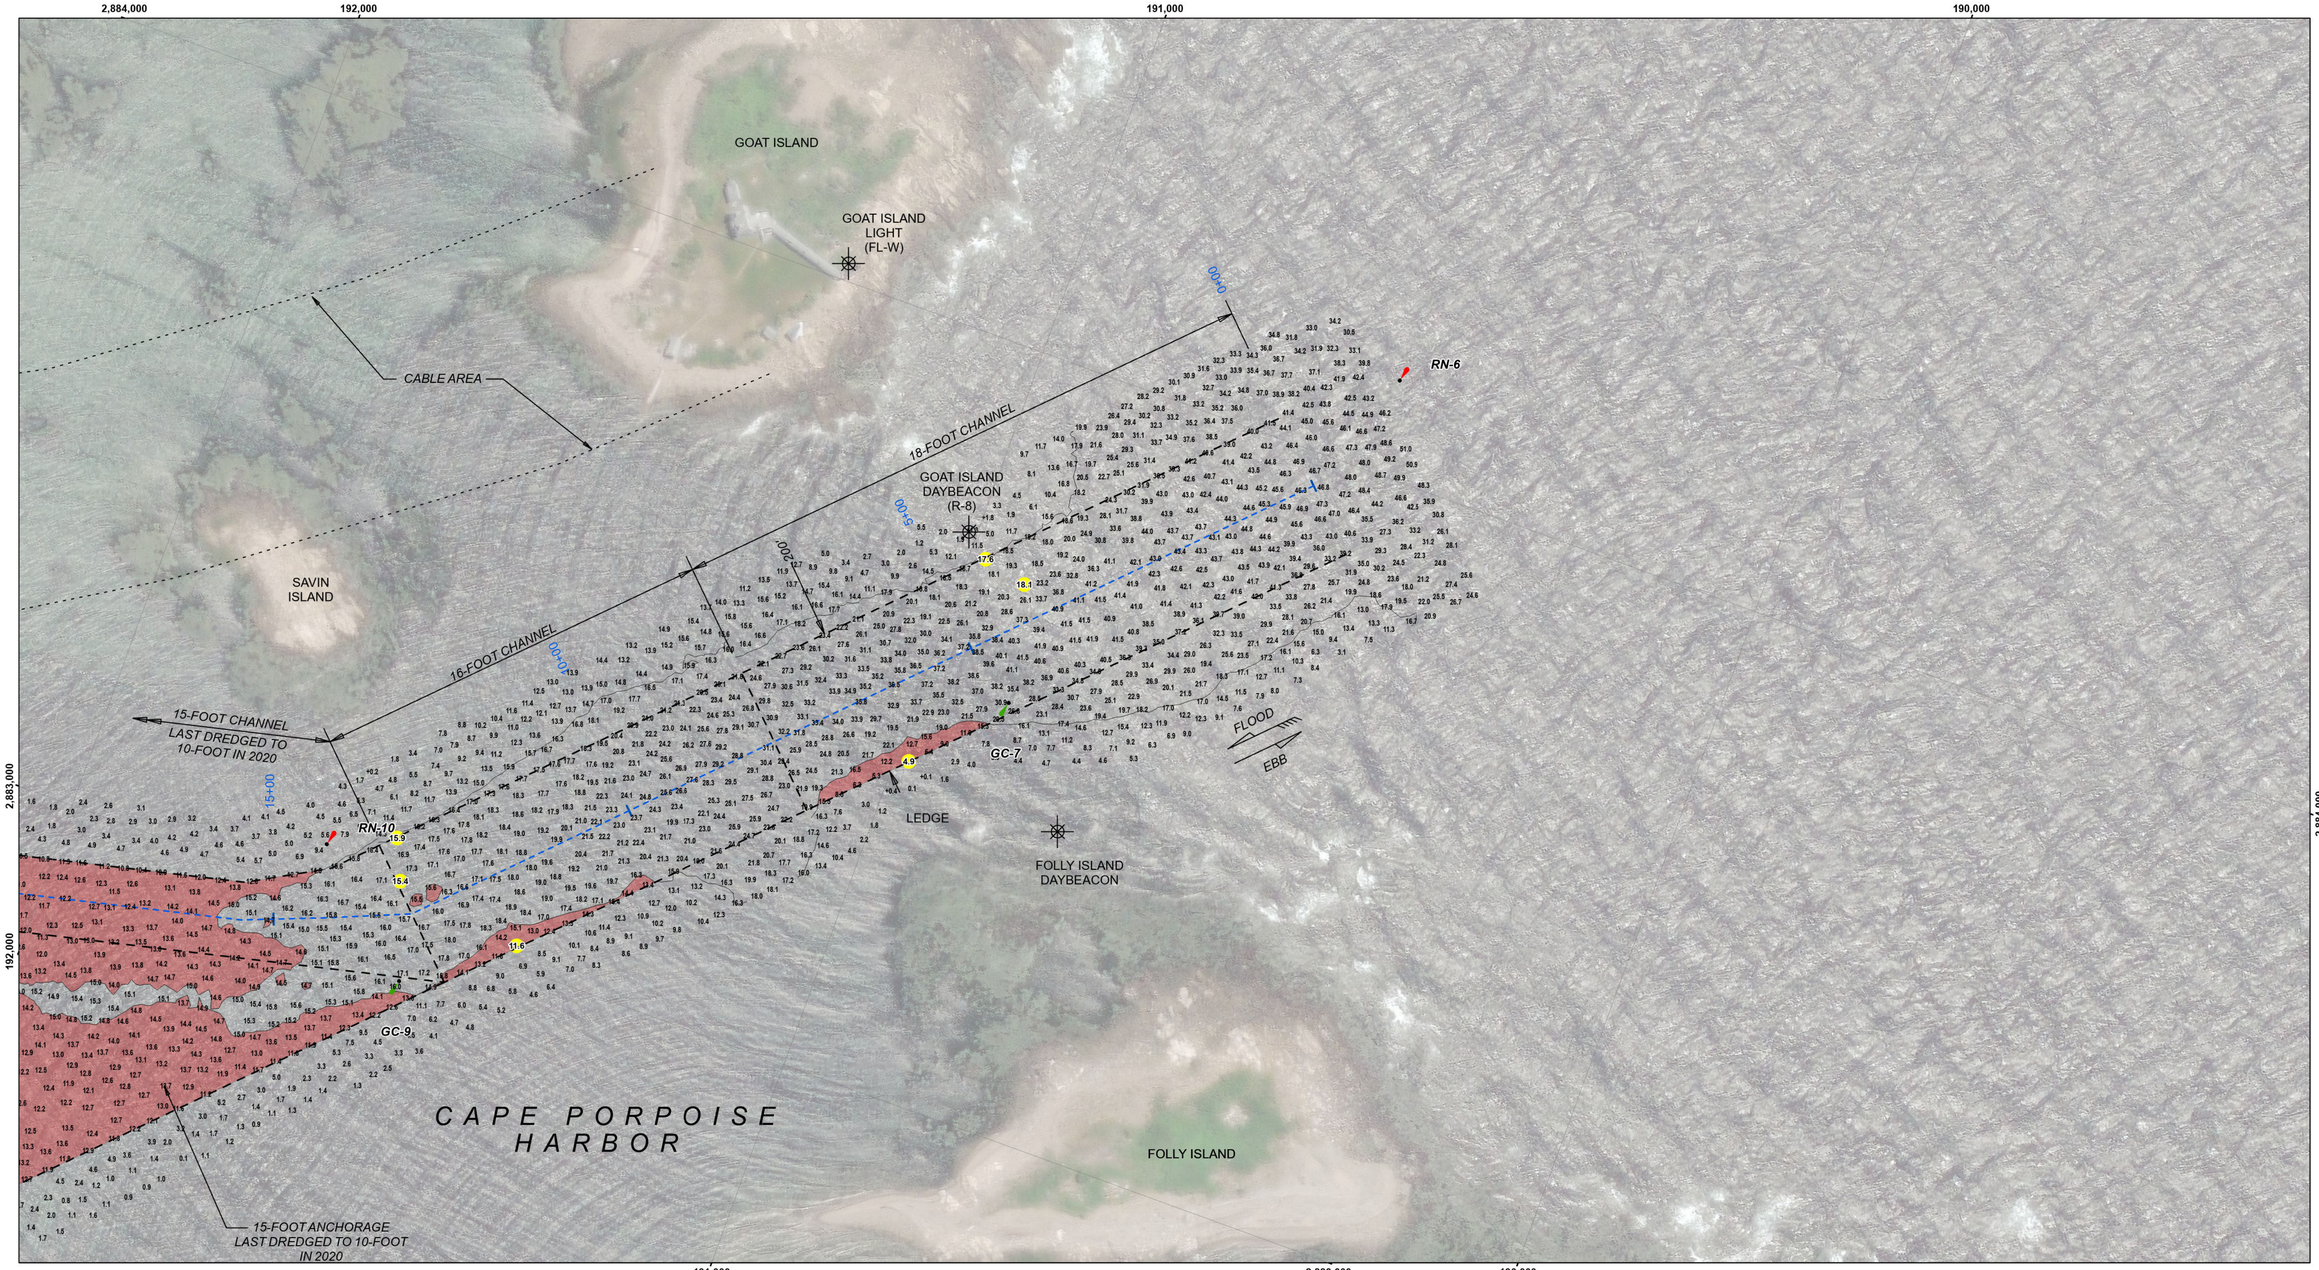


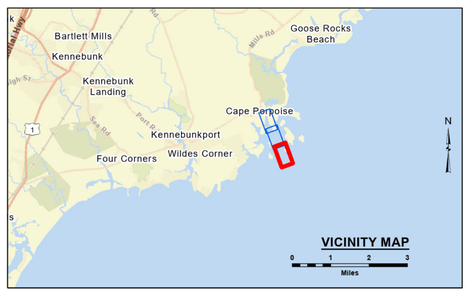

LEGEND

- Federal Navigation Channel
- Channel Center Line
- Cable or Pipeline Area
- Contour Line
- Marine Infrastructure*
- Fixed Navigation Aids
- Red Navigation Buoy
- Green Navigation Buoy
- Shoaling Area
- Shoalest Sounding**

** Shoalest Sounding per Quarter per Reach
* Present at Time of Survey

GRAPHIC SCALE

100 0 100 200

1" = 100' Feet

Notes:

Horizontal Datum: Maine West, ME-1802 NAD 83
Distance Units: U.S. Survey Feet
Vertical Datum: MLLW
Depth Units: U.S. Survey Feet
Vessel Name: KEEGAN
Sonar System: Reson T50 (Multibeam Sonar)
Sounding Frequency: 400 kHz
Survey Method: RTK GPS Tides
GPS_System: Trimble SPS 855 (RTK)
RTK Base Station: MTS Smartnet Max
Software Used: Hypack
Sounding Sort Distance: 20'
Field Books: R&H 4983
Survey No.: ME_62_CPH_20231130_CS_072
Reference NOAA Chart No.: 13286

The information depicted on these charts represents the results of surveys made on the dates indicated, and can only be considered as indicating the conditions existing at that time.

General Notes

The sounding information shown on this map represents the SHOALEST soundings of those obtained from hydrographic surveys conducted during NOVEMBER 2023. The positions of aids to navigation were located during survey operations, are provided for information only and should not be used for navigation. Orthoimagery is from a variety of sources and dates and is intended to portray general characteristics of the shoreline and other features. Temporal changes may have occurred since this dataset was collected and some parts may no longer be an accurate representation of the conditions. The information depicted on this map should NOT be used to determine volumes as volumes are determined from more sounding information than shown.

Project Remarks

Marine Infrastructure surveyed with LIDAR.

Water Level Information

Tides were recorded using RTK GPS. The MLLW to NAVD88 corrections for this project were obtained using NOAAs VDatum Program. The VDatum correction is 5.05 feet, and is referenced from VDatum Model Version 4.1 to 4.6, ME/NH/MA region Version 2.3. NAVD88 is above MLLW. Therefore, the correction should be added to NAVD88 to convert to MLLW. Mean Range of Tide is 8.84 feet. No tide gauges were used on this project.

US Army Corps of Engineers
District: CENAE

DISCLAIMER
Access Constraints: The United States Government furnishes this data and map without warranty or guarantee. The recipient understanding that the US Government makes no warranties, expressed or implied concerning the accuracy, completeness reliability, usability, performance, or merchantability of the information and the data furnished. The United States shall be under no liability whatsoever to any individual or any other entity made thereof. These data belong to the Government. Therefore the recipient fully agrees not to represent these data to anyone as other than government data. The recipient shall not transfer these data to others without also transferring this Disclaimer.

Distribution Liability: The data represents the results of data processing and analysis performed by the U.S. Army Corps of Engineers activity and indicates the general existing conditions. Engineers activity and indicates the general existing conditions. The user is responsible for verification of the data's quality, timeliness, accuracy, specifications. The user is responsible for the results of any of the application of this data for other than its intended purpose.

U.S. ARMY CORPS OF ENGINEERS
NEW ENGLAND DISTRICT


SURVEYED BY: MCD
CHECKED BY: WHW
ISSUE DATE: 12/11/2023
SUBMITTED BY: Barnett Morse
APPROVED BY: NAE Survey
SIZE: ANSI D
MAP DOCUMENT: ME_62_CPH_20231130_CS_072


CAPE PORPOISE HARBOR
KENNEBUNKPORT, MAINE
CONDITION SURVEY
18, 16 AND 15-FOOT CHANNELS
15 AND 6-FOOT ANCHORAGES

File Name: ME_62_CPH_20231130_CS_072

SHEET IDENTIFICATION
Cape Porpoise Harbor
Sheet 1 of 3

Revison Number: 5.23.8.1-5.23.8.1

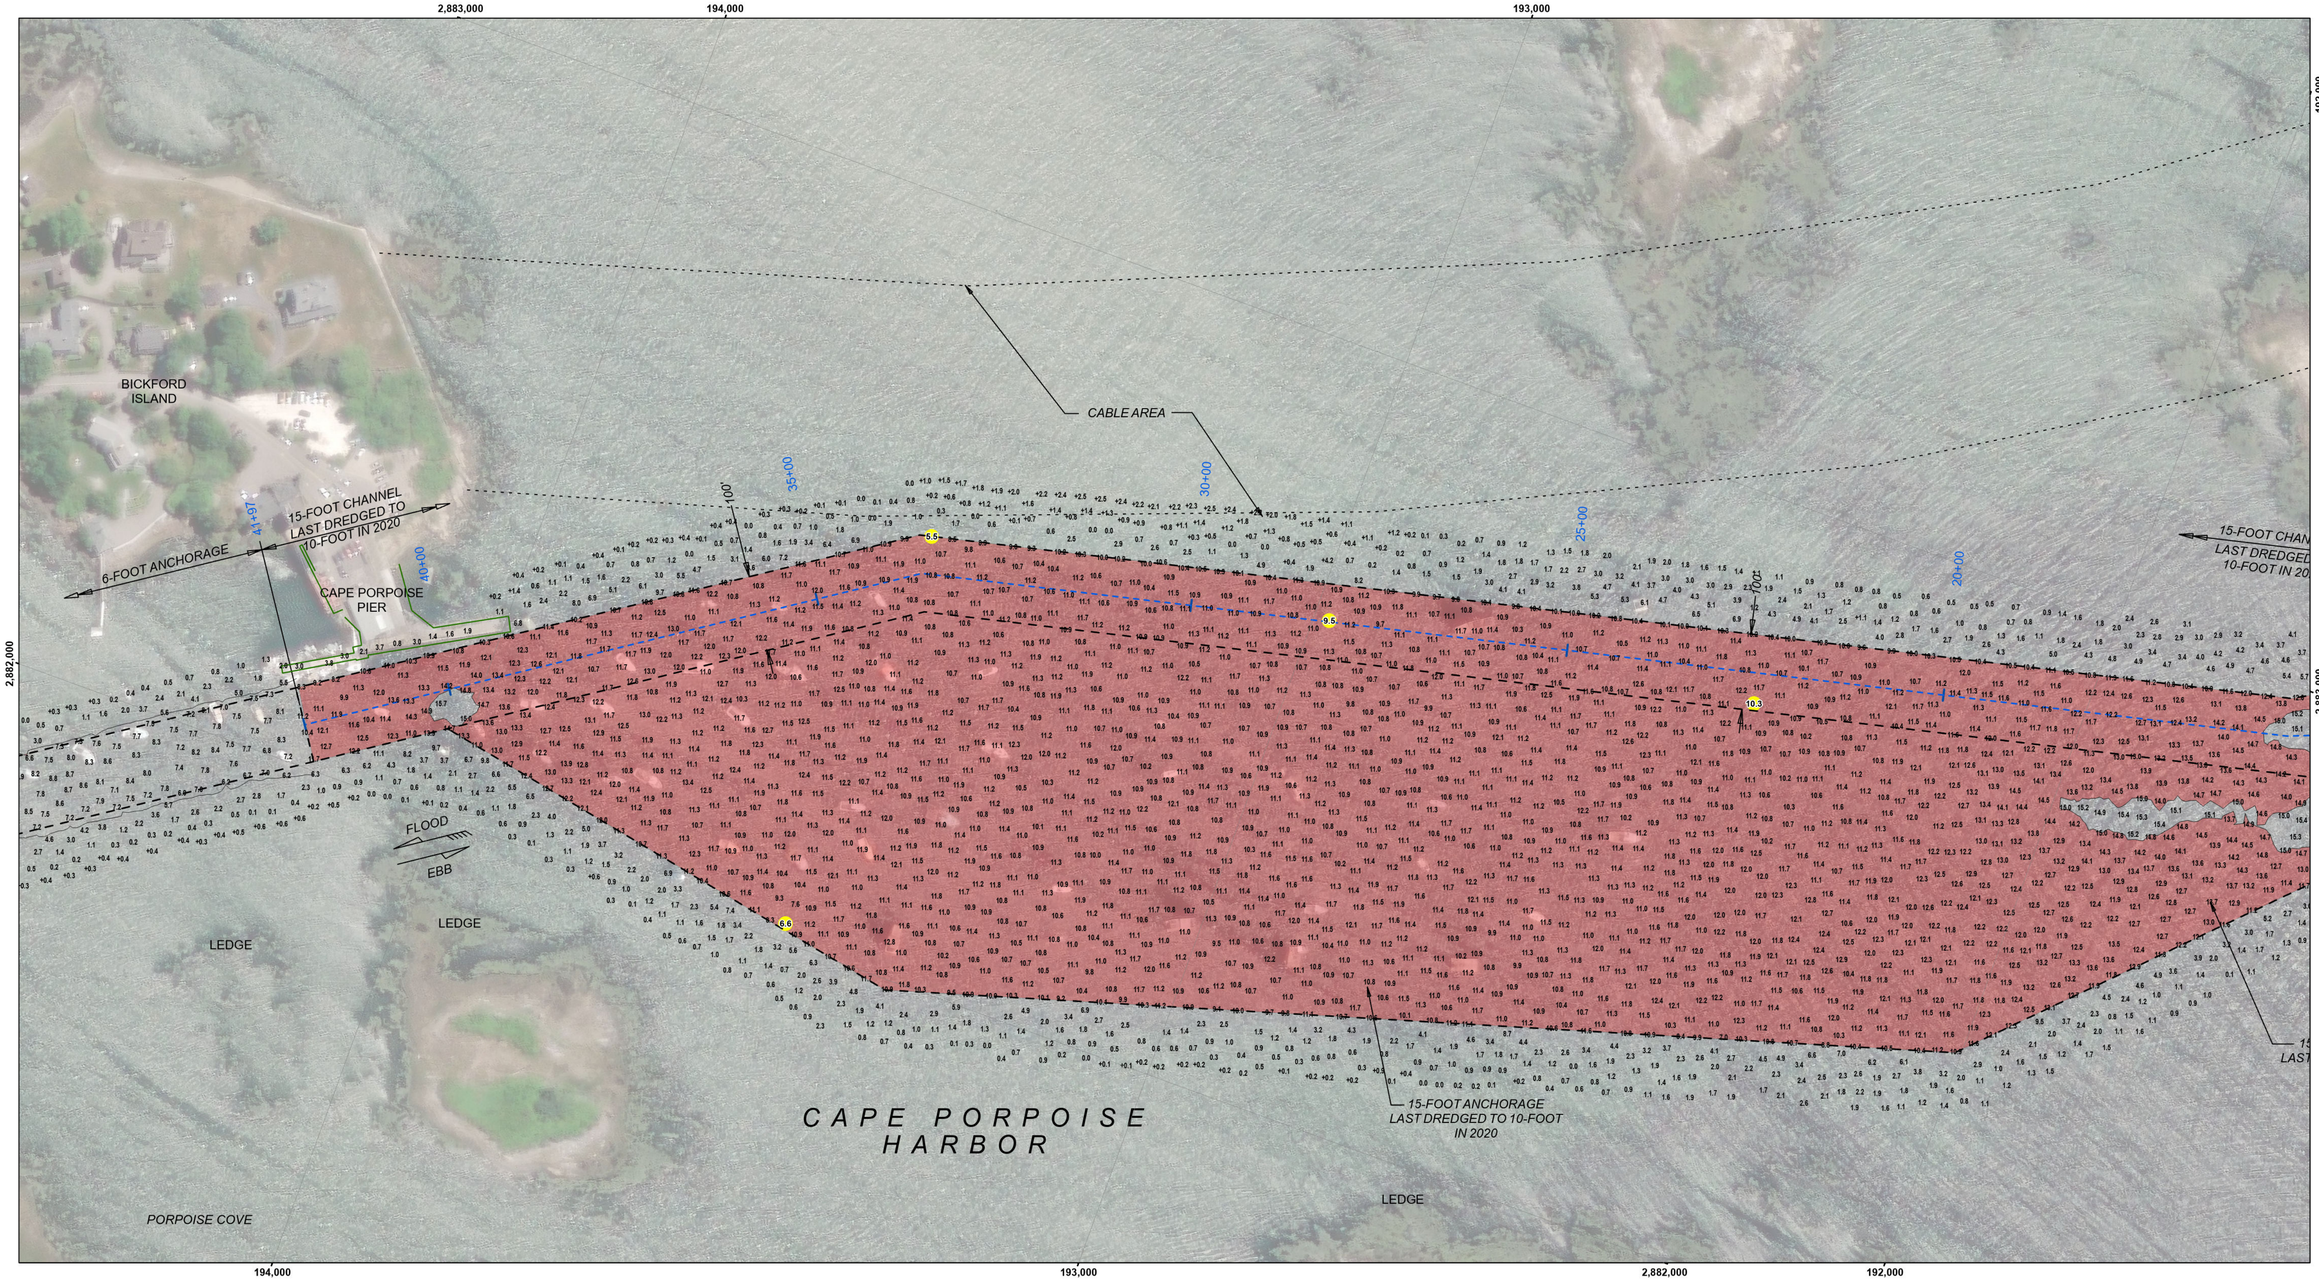

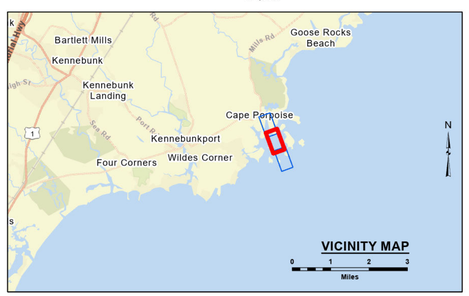

LEGEND

- Federal Navigation Channel
- Channel Center Line
- Cable or Pipeline Area
- Contour Line
- Marine Infrastructure*
- Fixed Navigation Aids
- Red Navigation Buoy
- Green Navigation Buoy
- Shoaling Area
- Shoalest Sounding**

** Shoalest Sounding per Quarter per Reach
* Present at Time of Survey

GRAPHIC SCALE

100 0 100 200
1" = 100' Feet

Notes:

Horizontal Datum: Maine West, ME-1802 NAD 83
Distance Units: U.S. Survey Feet
Vertical Datum: MLLW
Depth Units: U.S. Survey Feet
Vessel Name: KEEGAN
Sonar System: Reson T50 (Multibeam Sonar)
Sounding Frequency: 400 kHz
Survey Method: RTK GPS Tides
GPS_System: Trimble SPS 855 (RTK)
RTK Base Station: MTS Smartnet Max
Software Used: Hypack
Sounding Sort Distance: 20'
Field Books: R&H 4983
Survey No.: ME_62_CPH_20231130_CS_072
Reference NOAA Chart No.: 13286

The information depicted on these charts represents the results of surveys made on the dates indicated, and can only be considered as indicating the conditions existing at that time.

General Notes

The sounding information shown on this map represents the SHOALEST soundings of those obtained from hydrographic surveys conducted during NOVEMBER 2023. The positions of aids to navigation were located during survey operations, are provided for information only and should not be used for navigation. Orthoimagery is from a variety of sources and dates and is intended to portray general characteristics of the shoreline and other features. Temporal changes may have occurred since this dataset was collected and some parts may no longer be an accurate representation of the conditions. The information depicted on this map should NOT be used to determine volumes as volumes are determined from more sounding information than shown.

Project Remarks

Marine Infrastructure surveyed with LIDAR.

Water Level Information

Tides were recorded using RTK GPS. The MLLW to NAVD88 corrections for this project were obtained using NOAAs V-Datum Program. The V-Datum correction is 5.05 feet, and is referenced from V-Datum Model Version 4.1 to 4.6, ME/NH/MA region Version 2.3. NAVD88 is above MLLW. Therefore, the correction should be added to NAVD88 to convert to MLLW. Mean Range of Tide is 8.84 feet. No tide gauges were used on this project.

US Army Corps of Engineers
District: CENAE

DISCLAIMER
Access Constraints: The United States Government furnishes these data and information with the understanding that the US Government makes no warranties, expressed or implied concerning the accuracy, completeness reliability, usability, or suitability for any particular purpose of the information and the data furnished. The United States shall be under no liability whatsoever to any individual or group entity by reason of any use made thereof. These data belong to the Government. Therefore the recipient fully agrees not to represent these data to anyone as other than government data. The recipient shall not release or grant access to these data to others without also transferring this Disclaimer.

Distribution Liability: The data represents the results of data collection and analysis performed by the U.S. Army Corps of Engineers activity and indicates the general existing conditions. Each user is responsible for determining whether the data are suitable for the user's purpose and intended use. The user is responsible for the results of any of the application of this data for other than its intended purpose.

U.S. ARMY CORPS OF ENGINEERS
NEW ENGLAND DISTRICT


SURVEYED BY: MCD
CHECKED BY: WHW
ISSUE DATE: 12/11/2023
SUBMITTED BY: Barnett Morse
APPROVED BY: NAE Survey
SIZE: ANSI D
MAP DOCUMENT: ME_62_CPH_20231130_CS_072

CAPE PORPOISE HARBOR
KENNEBUNKPORT, MAINE
CONDITION SURVEY
18, 16 AND 15-FOOT CHANNELS
15 AND 6-FOOT ANCHORAGES
File Name: ME_62_CPH_20231130_CS_072

SHEET IDENTIFICATION
Cape Porpoise Harbor
Sheet 2 of 3

Revison Number: 5.23.8.1-5.23.8.1



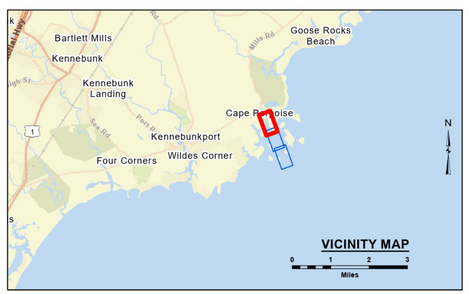

LEGEND

- Federal Navigation Channel
- Channel Center Line
- Cable or Pipeline Area
- Contour Line
- Marine Infrastructure*
- Fixed Navigation Aids
- Red Navigation Buoy
- Green Navigation Buoy
- Shoaling Area
- Shoalest Sounding**

** Shoalest Sounding per Quarter per Reach
* Present at Time of Survey

GRAPHIC SCALE

100 0 100 200

1" = 100' Feet

Notes:
Horizontal Datum: Maine West, ME-1802 NAD 83
Distance Units: U.S. Survey Feet
Vertical Datum: MLLW
Depth Units: U.S. Survey Feet
Vessel Name: KEEGAN
Sonar System: Reson T50 (Multibeam Sonar)
Sounding Frequency: 400 kHz
Survey Method: RTK GPS Tides
GPS_System: Trimble SPS 855 (RTK)
RTK Base Station: MTS Smartnet Max
Software Used: Hypack
Sounding Sort Distance: 20'
Field Books: R&H 4983
Survey No.: ME_62_CPH_20231130_CS_072
Reference NOAA Chart No.: 13286

The information depicted on these charts represents the results of surveys made on the dates indicated, and can only be considered as indicating the conditions existing at that time.

General Notes
The sounding information shown on this map represents the SHOALEST soundings of those obtained from hydrographic surveys conducted during NOVEMBER 2023. The positions of aids to navigation were located during survey operations, are provided for information only and should not be used for navigation. Orthoimagery is from a variety of sources and dates and is intended to portray general characteristics of the shoreline and other features. Temporal changes may have occurred since this dataset was collected and some parts may no longer be an accurate representation of the conditions. The information depicted on this map should NOT be used to determine volumes as volumes are determined from more sounding information than shown.

Project Remarks
Marine Infrastructure surveyed with LIDAR.

Water Level Information
Tides were recorded using RTK GPS. The MLLW to NAVD88 corrections for this project were obtained using NOAAs V-Datum Program. The V-Datum correction is 5.05 feet, and is referenced from V-Datum Model Version 4.1 to 4.6, ME/NH/MA region Version 2.3. NAVD88 is above MLLW. Therefore, the correction should be added to NAVD88 to convert to MLLW. Mean Range of Tide is 8.84 feet. No tide gauges were used on this project.

US Army Corps of Engineers
District: CENAE

DISCLAIMER
Access Constraints: The United States Government furnishes these data and information with the understanding that it bears no liability of any kind in connection with their use. Although the US Government makes no warranties, expressed or implied concerning the accuracy, completeness, reliability, or suitability of these data and information, it strives to ensure the information and the data furnished. The United States shall be used with the understanding that any liability arising out of their incorrectness, incompleteness, or inaccuracy in any respect is the responsibility of the person or agency using such data or information. Distribution Liability: The data represents the results of data collected by the U.S. Army Corps of Engineers, New England District Engineers' activity and indicates the general existing conditions. Users are cautioned to consider carefully the provisional nature of these data before using them in decision-making. The user is responsible for the results of any of the application of this data for other than its intended purpose. These data belong to the Government. Therefore the recipient fully agrees not to represent these data to anyone as other than Government data unless authorized in writing by the Government. Also, these data to others without also transferring this Disclaimer.

U.S. ARMY CORPS OF ENGINEERS
NEW ENGLAND DISTRICT

SURVEYED BY: MJD
CHECKED BY: WHW
SUBMITTED BY: Barnett Morse
APPROVED BY: 1AE Survey
ISSUE DATE: 12/11/2023
SIZE: ANSI D
MAP DOCUMENT: ME_62_CPH_20231130_CS_072

CAPE PORPOISE HARBOR
KENNEBUNKPORT, MAINE
CONDITION SURVEY
18, 16 AND 15-FOOT CHANNELS
15 AND 6-FOOT ANCHORAGES

File Name: **ME_62_CPH_20231130_CS_072**

SHEET IDENTIFICATION
Cape Porpoise Harbor
Sheet 3 of 3

Revison Number: 5.23.8.1-5.23.8.1