
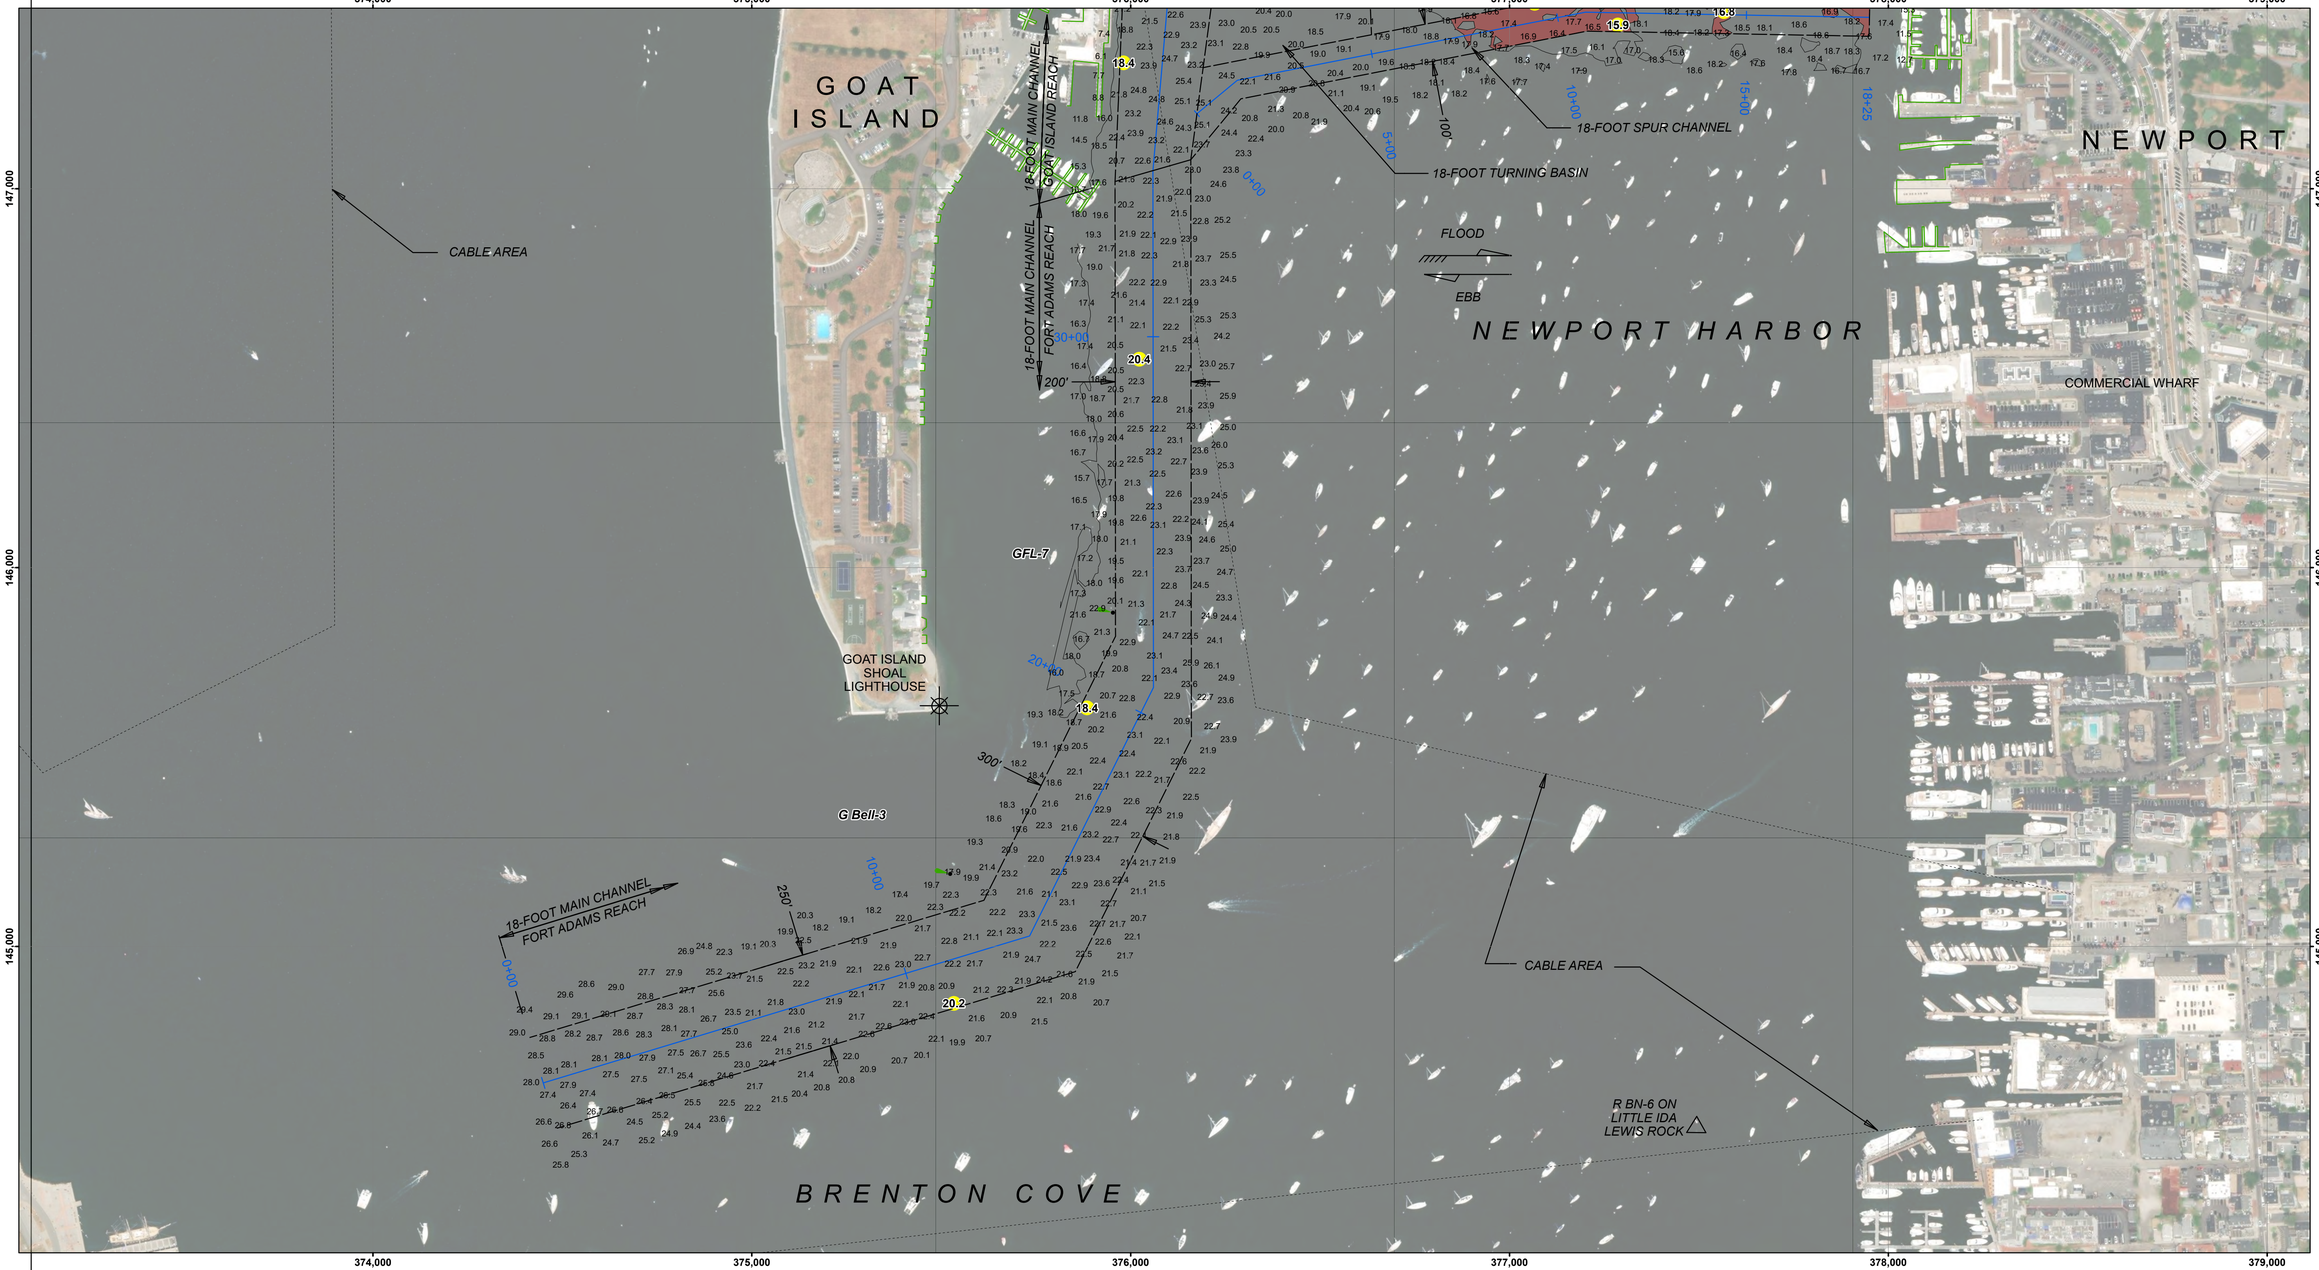


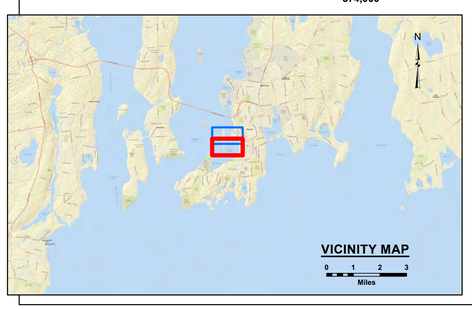

LEGEND

- Federal Navigation Channel
- Cable or Pipeline area
- Channel Center Line
- Marine Infrastructure*
- Contour Line
- Fixed Navigation Aids
- Obstruction Point
- Red Navigation Buoy
- Green Navigation Buoy
- Shoaling Area
- Shoalest Sounding**

** Shoalest Sounding per Quarter per Reach
* Present at Time of Hydrographic Survey

GRAPHIC SCALE

1" = 200' (200 0 200 400 Feet)

N W E S

Notes:
Horizontal Datum:Rhode Island, RI-3800 NAD 83
Distance Units: U.S. Survey Feet
Vertical Datum: MLLW
Depth Units: U.S. Survey Feet
Vessel Name: Keegan
Sonar System: Reson T50 (Multibeam Sonar)
Sounding Frequency: 400 kHz
Survey Method: RTK GPS TIDES
GPS_System: Applanix POS MV
RTK Base Station: MTS Smartnet Imax
Software Used: Hypack
Sounding Sort Distance: 50'
Field Books: R&H 4984
Survey No.: RI_12_NPT_20250204_CS_011
Reference NOAA Chart No.: ENC US5PVDDD & US5PVDDE

The information depicted on these charts represents the results of surveys made on the dates indicated, and can only be considered as indicating the conditions existing at that time.

General Notes
The sounding information shown on this map represents the SHOALEST soundings of those obtained from hydrographic surveys conducted during February 2025. The positions of aids to navigation were located during survey operations, are provided for information only and should not be used for navigation. Orthoimagery is from a variety of sources and dates and is intended to portray general characteristics of the shoreline and other features. Temporal changes may have occurred since this dataset was collected and some parts may no longer be an accurate representation of the conditions. The information depicted on this map should NOT be used to determine volumes as volumes are determined from more sounding information than shown.

Project Remarks
Marine Infrastructure surveyed with lidar.

Water Level Information
Tides were recorded using RTK GPS. NAVD88 to MLLW corrections were logged utilizing NOAA's V-Datum regional model CT/RI Region Version 3.4. The corrections in the project area is 2.03 feet. MLLW is below NAVD88; therefore, the correction should be added to NAVD88 to convert to MLLW (e.g.-10 NAV88 = -8 MLLW when using a 2-foot correction).

US Army Corps of Engineers
District: CENAE

Distribution Liability: The data represents the results of data collected and processed by the Corps of Engineers activity and indicates the general existing conditions. Each user is solely responsible for the selection of data and accuracy specifications. The user is responsible for the results of any of the application of this data for other than its intended purpose.

DISCLAIMER
Access Constraints: The United States Government furnishes these data and information without warranty. It is agreed by the recipient and by any subsequent transferee that the US Government makes no warranties, expressed or implied concerning the accuracy, completeness, reliability, or suitability of this information. The US Government and the information and the data furnished. The United States shall be under no liability whatsoever to any individual or group entity for any damage from any use of the data or information provided under this agreement. These data belong to the Government. Therefore the recipient fully agrees not to represent these data to anyone as other than Government data. The recipient shall not transfer these data to others without also transferring this Disclaimer.

U.S. ARMY CORPS OF ENGINEERS
NEW ENGLAND DISTRICT

SUBMITTED BY: Joshua Bromberg
APPROVED BY: NAE Survey
SURVEYED BY: NCD
CHECKED BY: WHW
ISSUE DATE: 2/10/2025
SIZE: ANSI D
MAP DOCUMENT: RI_12_NPT_20250204_CS_011


NEWPORT HARBOR
NEWPORT, RHODE ISLAND
CONDITION SURVEY
18-FOOT CHANNELS AND 18-FOOT TURNING BASIN


File Name: RI_12_NPT_20250204_CS_011

SHEET IDENTIFICATION
Newport Harbor

Sheet 1 of 2

Revison Number: 5.24.09.03-5.24.09.03

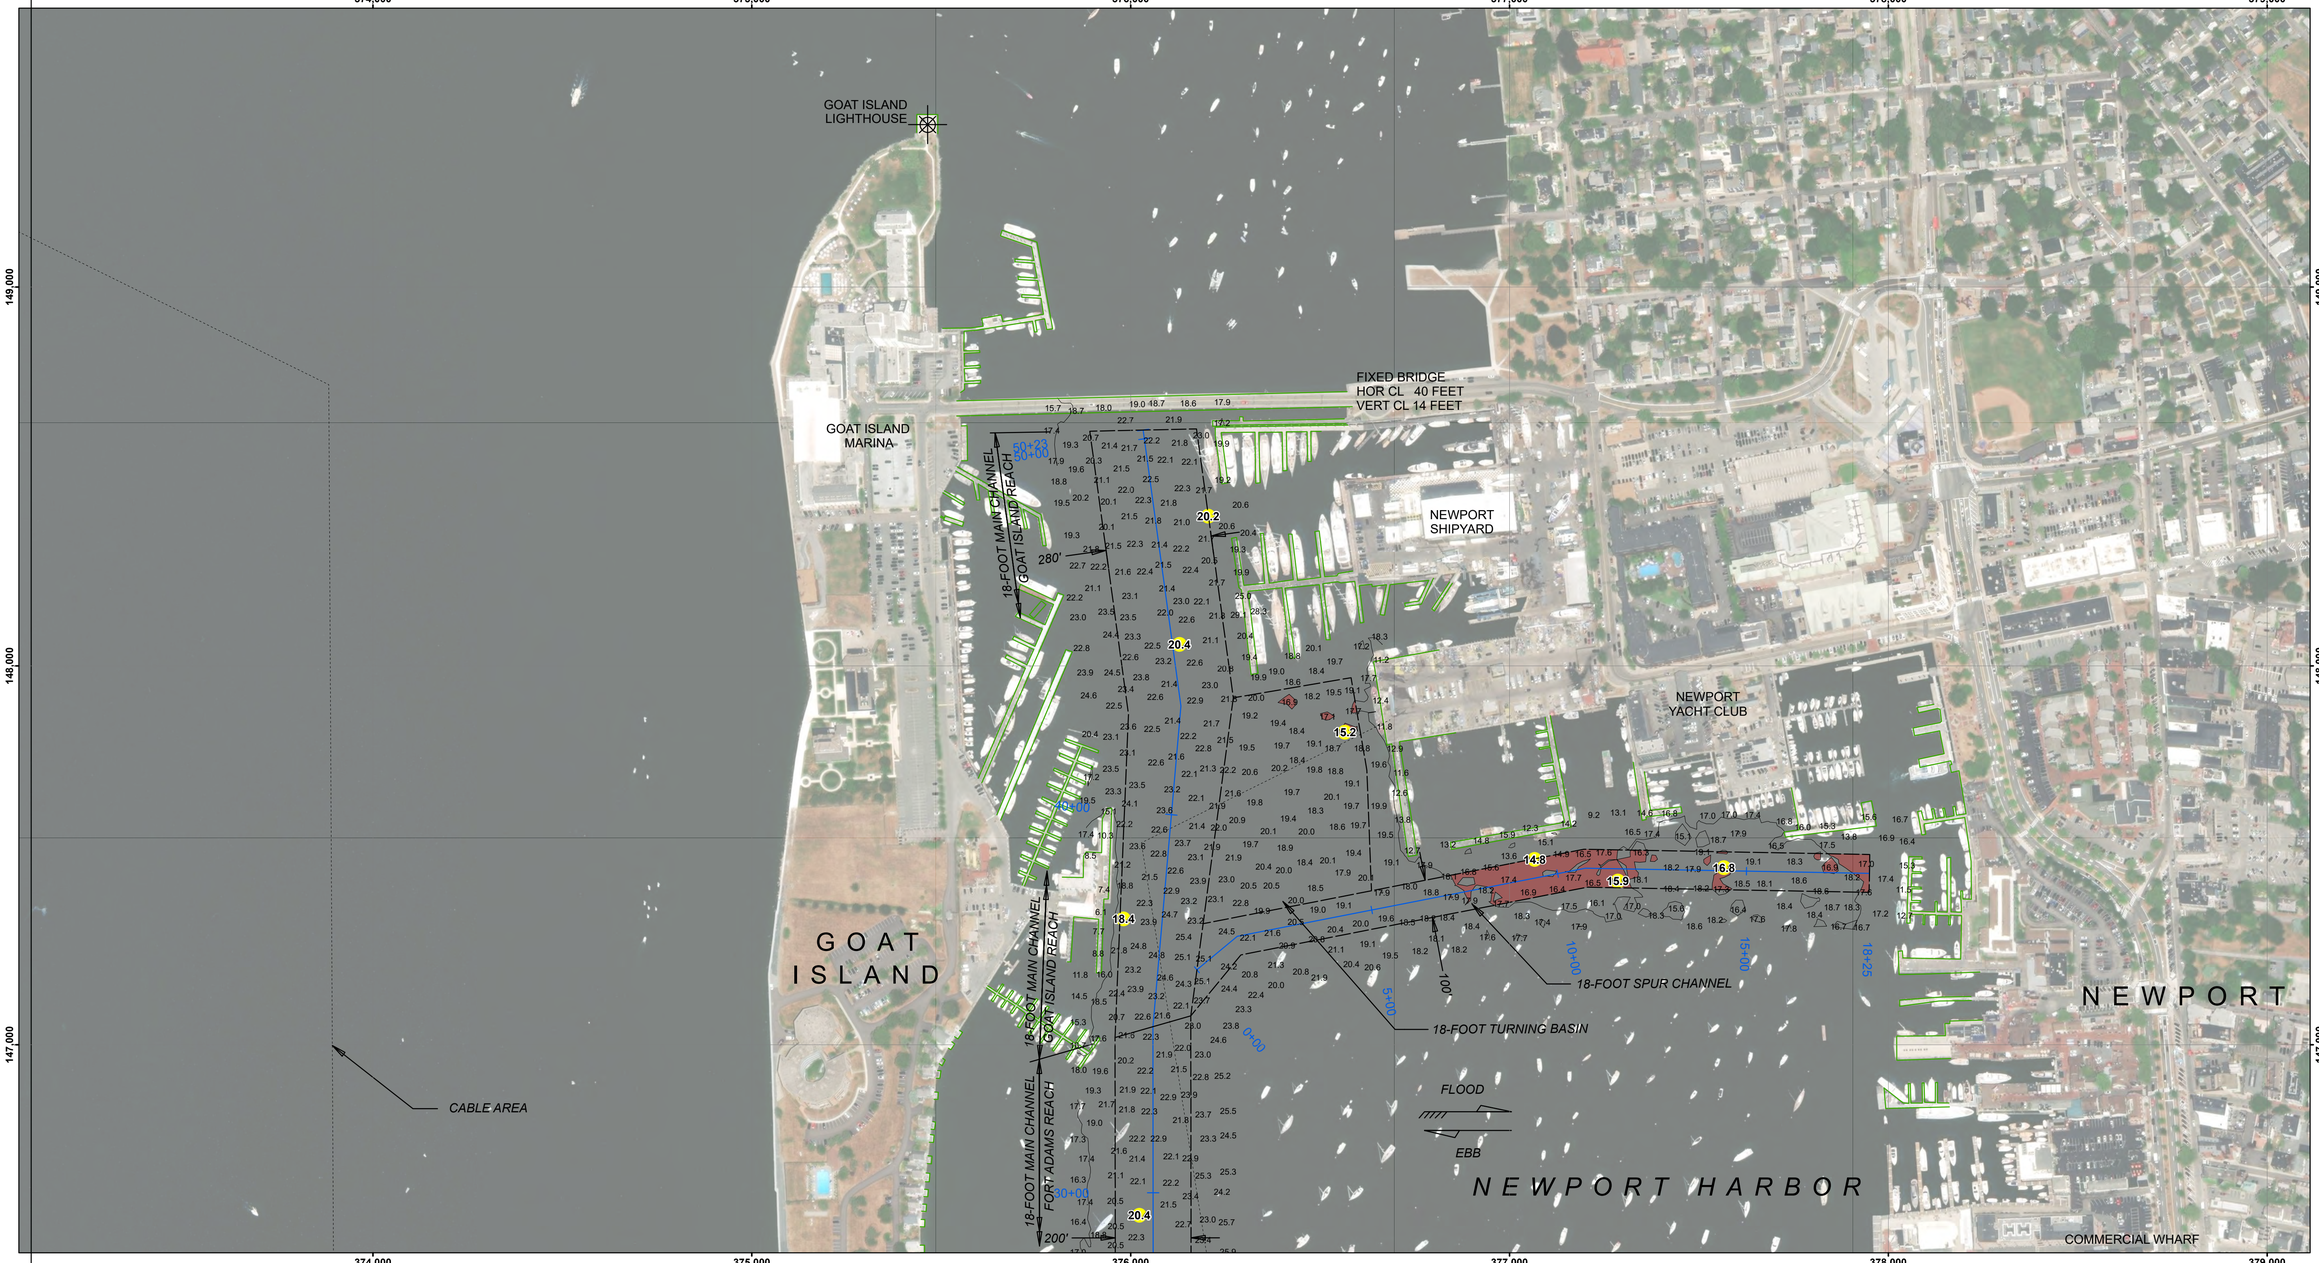

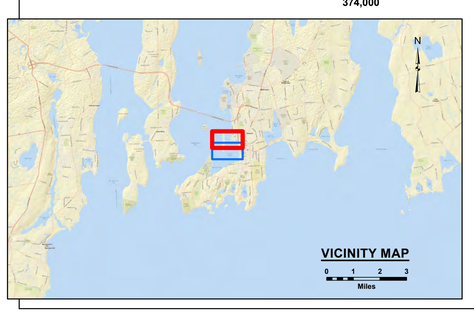

LEGEND

- Federal Navigation Channel
- Cable or Pipeline area
- Channel Center Line
- Marine Infrastructure*
- Contour Line
- Fixed Navigation Aids
- Obstruction Point
- Red Navigation Buoy
- Green Navigation Buoy
- Shoaling Area
- Shoalest Sounding**

** Shoalest Sounding per Quarter per Reach
* Present at Time of Hydrographic Survey

GRAPHIC SCALE

200 0 200 400

1" = 200' Feet

N W E S

Notes:
Horizontal Datum: Rhode Island, RI-3800 NAD 83
Distance Units: U.S. Survey Feet
Vertical Datum: MLLW
Depth Units: U.S. Survey Feet
Vessel Name: Keegan
Sonar System: Reson T50 (Multibeam Sonar)
Sounding Frequency: 400 kHz
Survey Method: RTK GPS TIDES
GPS_System: Applanix POS MV
RTK Base Station: MTS Smartnet Imax
Software Used: Hypack
Sounding Sort Distance: 50'
Field Books: R&H 4984
Survey No.: RI_12_NPT_20250204_CS_011
Reference NOAA Chart No.: ENC US5PVDDD & US5PVDDE

The information depicted on these charts represents the results of surveys made on the dates indicated, and can only be considered as indicating the conditions existing at that time.

General Notes
The sounding information shown on this map represents the SHOALEST soundings of those obtained from hydrographic surveys conducted during February 2025. The positions of aids to navigation were located during survey operations, are provided for information only and should not be used for navigation. Orthoimagery is from a variety of sources and dates and is intended to portray general characteristics of the shoreline and other features. Temporal changes may have occurred since this dataset was collected and some parts may no longer be an accurate representation of the conditions. The information depicted on this map should NOT be used to determine volumes as volumes are determined from more sounding information than shown.

Project Remarks
Marine Infrastructure surveyed with lidar.

Water Level Information
Tides were recorded using RTK GPS. NAVD88 to MLLW corrections were logged utilizing NOAA's V-Datum regional model CT/RI Region Version 3.4. The corrections in the project area is 2.03 feet. MLLW is below NAVD88; therefore, the correction should be added to NAVD88 to convert to MLLW (e.g.-10 NAV88 = -8 MLLW when using a 2-foot correction).

US Army Corps of Engineers
District: CENAE

DISCLAIMER
Access Constraints: The United States Government furnishes this map/data/publication "as is" without warranty of any kind and expressly disclaims any warranties, understanding that the US Government makes no warranties, represented or implied concerning the accuracy, completeness, reliability, or suitability of the information contained herein. Neither the information and the data furnished. The United States shall be under no liability whatsoever to any person by reason of any use made thereof. These data belong to the Government. Therefore the recipient fully agrees not to represent these data to anyone as other than data received from the Government. The recipient shall not transfer these data to others without also transferring this Disclaimer.

Distribution Liability: The data represents the results of data collection and analysis performed by the Corps of Engineers activity and indicates the general existing conditions. Corps of Engineers is not responsible for the results of any application of this data for other than its intended purpose.

U.S. ARMY CORPS OF ENGINEERS
NEW ENGLAND DISTRICT

SUBMITTED BY: Joshua Bromberg
APPROVED BY: NAE Survey
SURVEYED BY: NCD
CHECKED BY: WHW
ISSUE DATE: 2/10/2025
SIZE: ANSI D
MAP DOCUMENT: RI_12_NPT_20250204_CS_011

NEWPORT HARBOR
NEWPORT, RHODE ISLAND
CONDITION SURVEY

18-FOOT CHANNELS AND
18-FOOT TURNING BASIN

File Name: RI_12_NPT_20250204_CS_011

SHEET IDENTIFICATION
Newport Harbor

Sheet 2 of 2

Revison Number: 5.24.09.03-5.24.09.03