US Army Corps
of Engineers
District: CESAM

DISCLAIMER
Access Constraints: The United States Government furnishes these data and the recipient accepts and uses them with the express understanding that the US Government makes no warranties, expressed, or implied concerning the accuracy, completeness, readability, usability or suitability for any particular purpose of the information and the data furnished. The United States shall be under no liability whatsoever to any person by reason of any use made thereof. These data belong to the Government. Therefore the recipient fully agrees not to represent these data to anyone as other than Government provided data. The recipient may not transfer these data to others without also transferring this Disclaimer.

Distribution Liability: The data represents the results of data collection/processing for a specific US Army Corps of Engineers activity and indicates the general existing conditions. As such, it is only valid for its intended use, content, time and accuracy specifications. The user is responsible for the results of any of the application of the data for other than its intended purpose.

U.S. ARMY CORPS OF ENGINEERS
MOBILE DISTRICT

Submitted: MCLENDON	Surveyed By: ___
Recommended: CALHOUN Lead, Navigation Support Section	Plotted By: ___
Approved: REGISTER Chief, Panama City Site Office	Checked By: ___

PANAMA CITY, FL
CF_19_PCE_20260723_CS
Panama City Outer Bar/Entrance
STA.444+00 - 471+66
CONDITION SURVEY

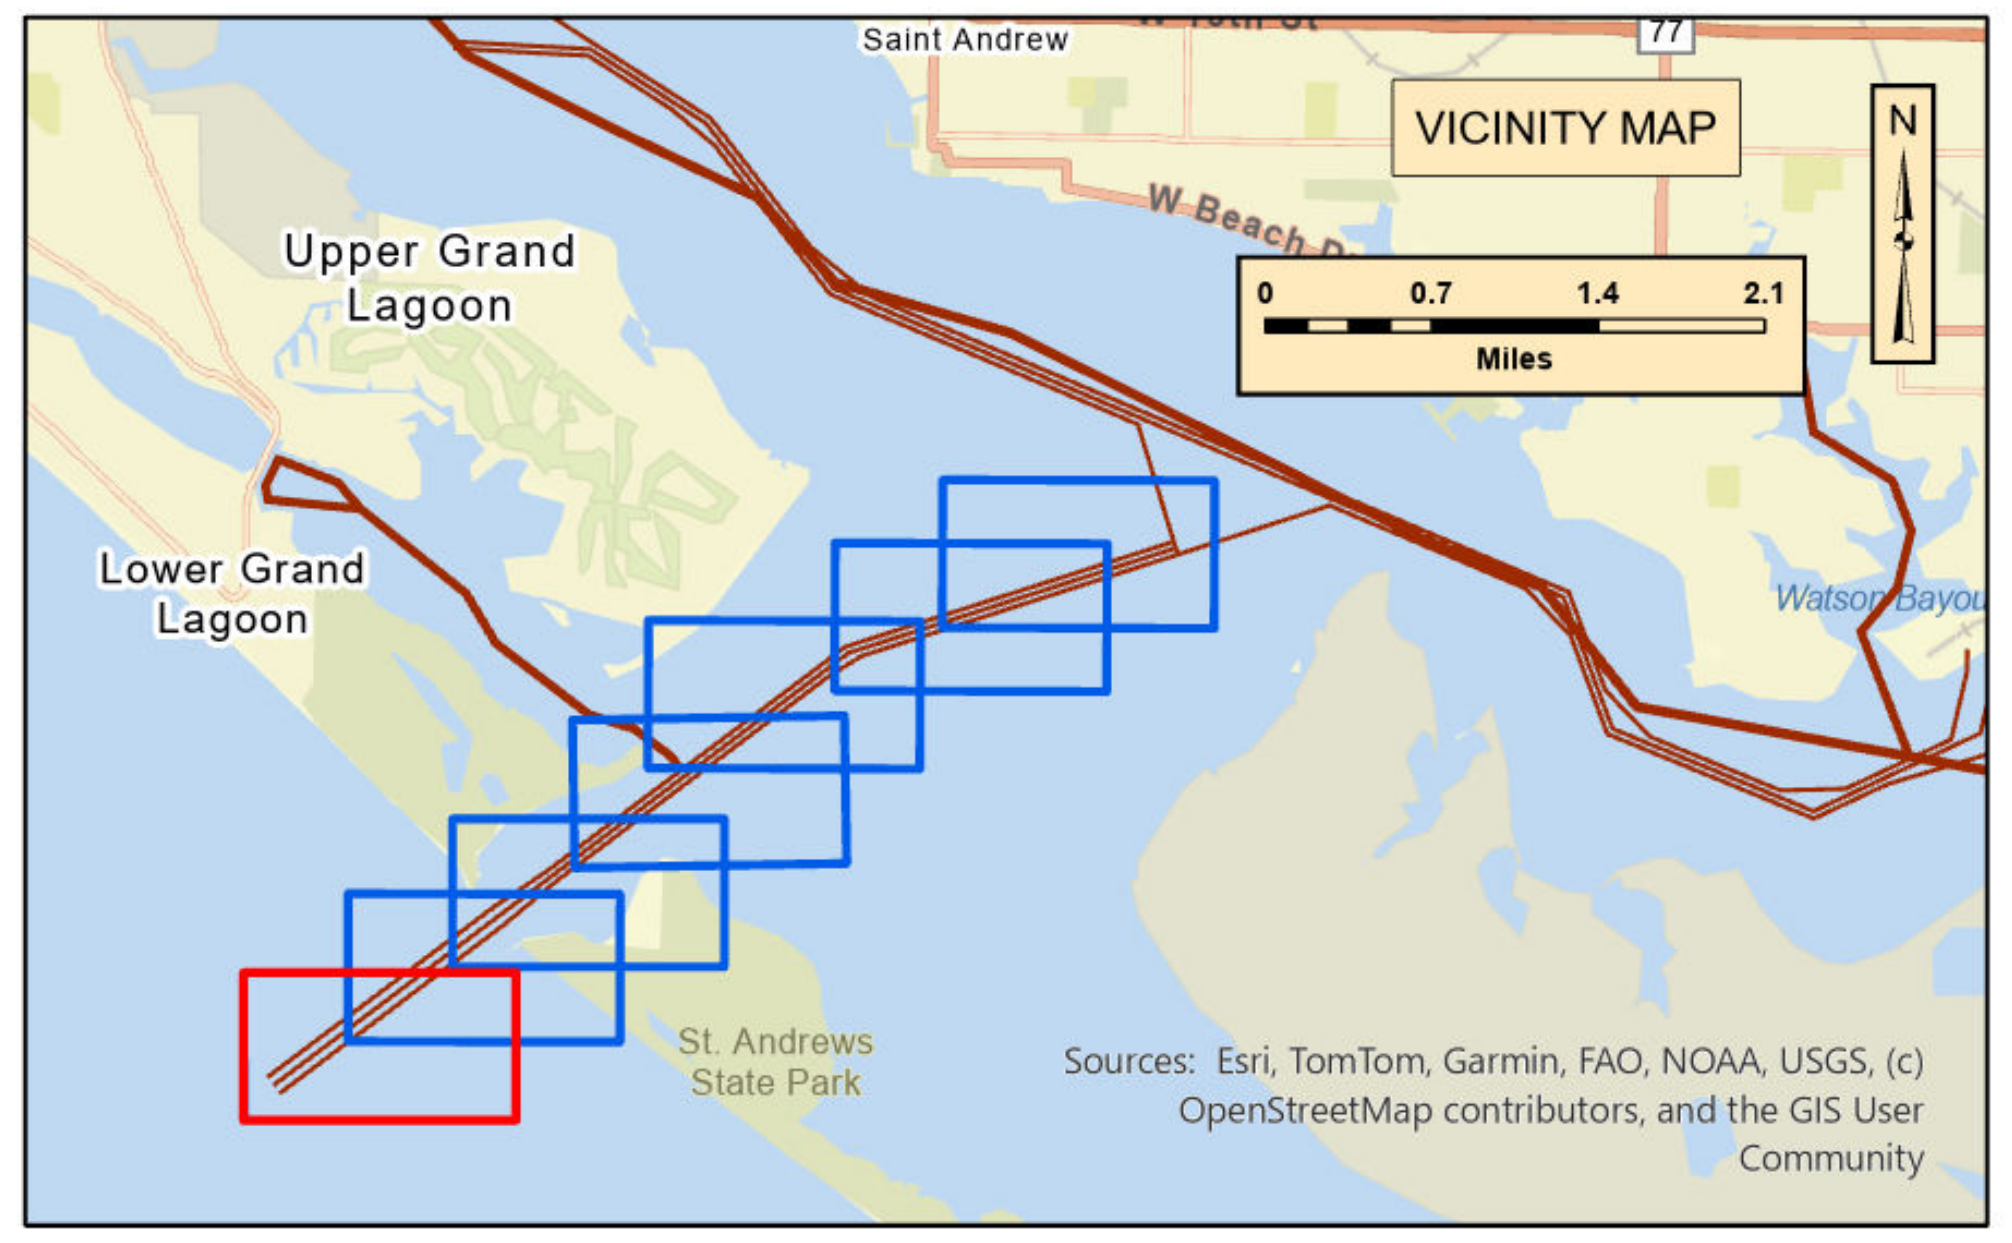

Sources: Esri, TomTom, Garmin, FAO, NOAA, USGS, (c) OpenStreetMap contributors, and the GIS User Community

- ☐ Daybeacon
- ▲ Daybeacon Even
- 🟩 Daybeacon Odd
- Lighted Buoy
- Lighted Buoy Even
- Lighted Buoy Odd
- Light
- Light Even
- Light Odd
- Range Forward Light
- Range Rear Light
- Unlighted Buoy
- Unlighted Buoy Even
- Unlighted Buoy Odd
- ● Other Aid
- Contour Lines
- Depth Change

Bathymetry Depth

Value
🟥 6.59 - 36 ft (Entrance Channel)
🟥 36 - 38 ft (Outer Bar)
38 - 40 ft
40 - 45 ft
45 - 55 ft
55 - 65 ft
65 - 77.01 ft

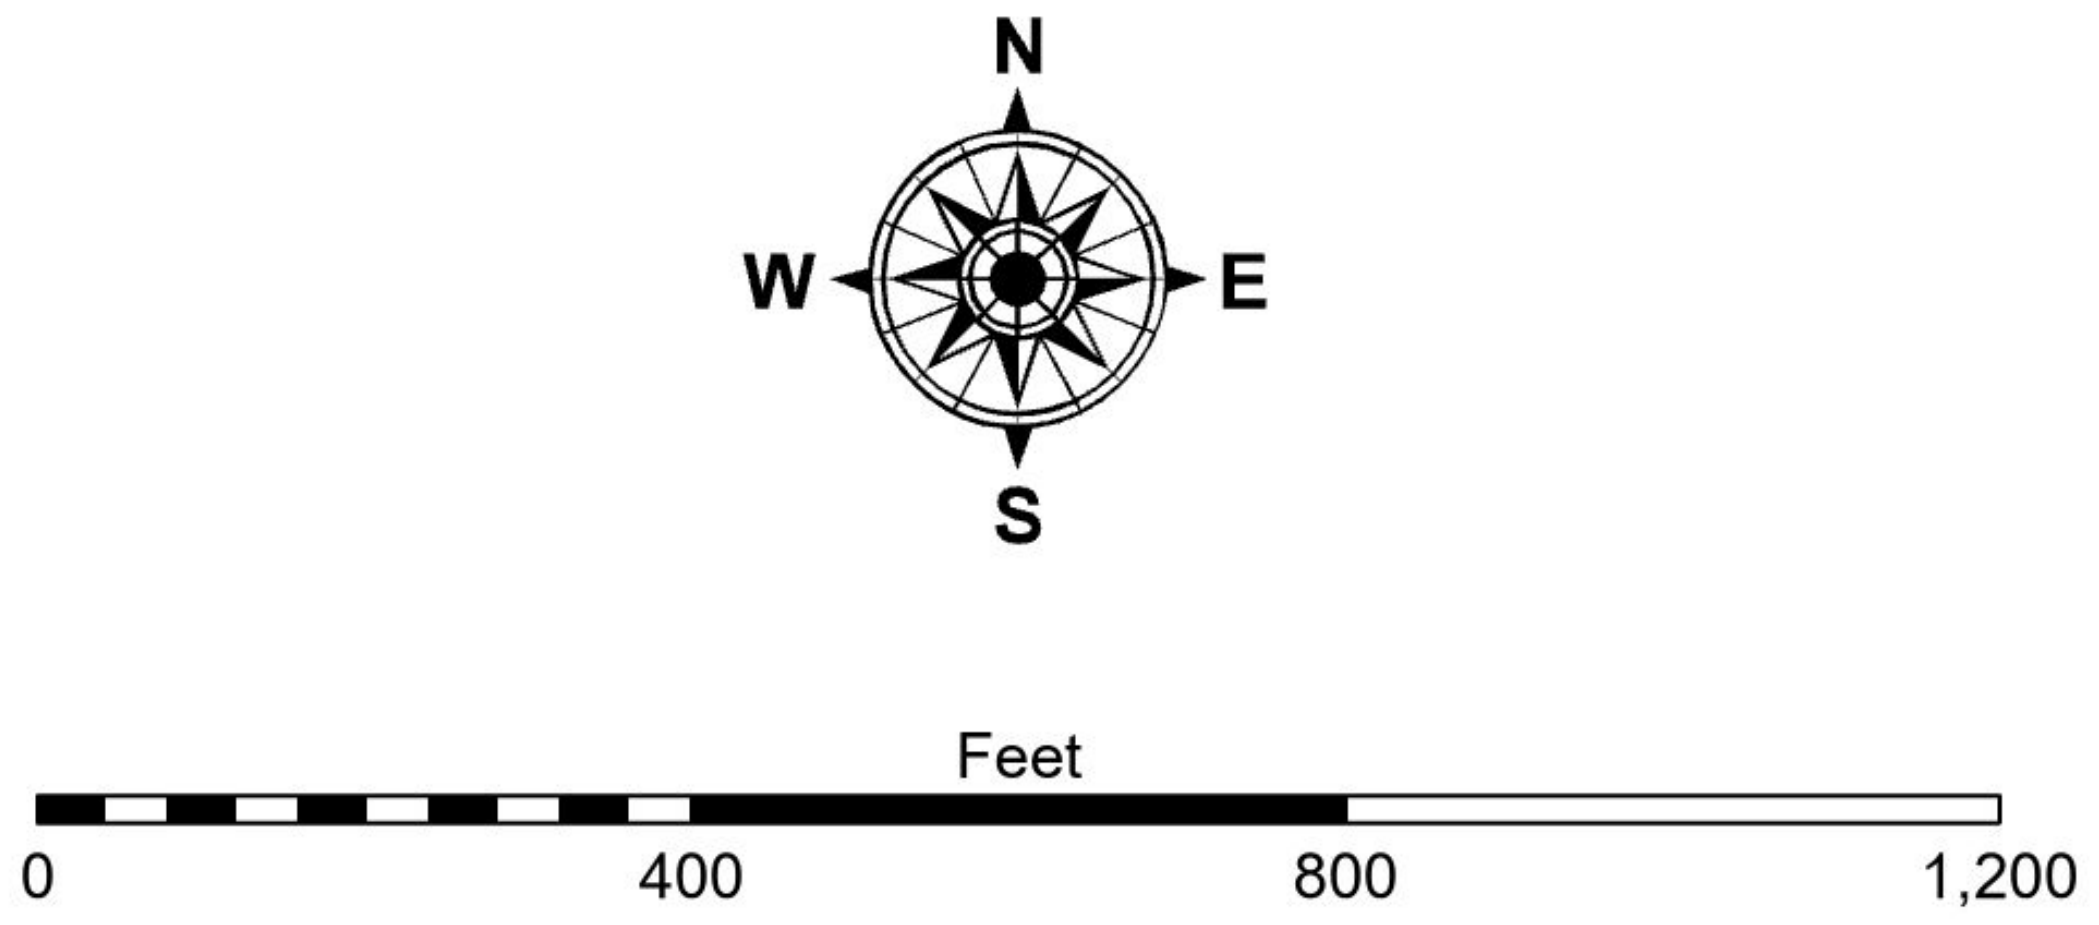

NOTES:

1. ALL ELEVATIONS SHOWN ARE REFERENCED TO FEET BELOW MEAN LOWER LOW WATER (M.L.L.W.)
2. COORDINATES ARE REFERENCED TO FLORIDA STATE PLANE COORDINATE SYSTEM 83 DATUM NORTH ZONE.
3. SURVEYED BY:MCLENDON/YARBROUGH
4. SURVEY VESSEL:BLACKWATER
5. SURVEY DATE:07/24/2026
6. THE INFORMATION DEPICTED ON THIS MAP REPRESENTS THE RESULTS OF SURVEYS MADE ON THE DATES INDICATED AND CAN ONLY BE CONSIDERED AS INDICATING THE GENERAL CONDITIONS EXISTING AT THE TIME.
7. FREQUENCY SOUNDINGS: 450 KHz.
8. SOUNDINGS DEPICTED ON THIS MAP ARE BASED ON A 3' x 3' MEDIAN CELL, SORTED TO A 36' INTERVAL.
9. CONTOURS ON THIS MAP WERE GENERATED USING THE 3 x 3 DATA SET.

Imagery courtesy of: ESRI

Sheet
Reference
Number
1 of 7

US Army Corps of Engineers
District: CESAM

DISCLAIMER
Access Constraints: The United States Government furnishes these data and the recipient accepts and uses them with the express understanding that the US Government makes no warranties, expressed, or implied concerning the accuracy, completeness, readability, usability or suitability for any particular purpose of the information and the data furnished. The United States shall be under no liability whatsoever to any person by reason of any use made thereof. These data belong to the Government. Therefore the recipient fully agrees not to represent these data to anyone as other than Government provided data. The recipient may not transfer these data to others without also transferring this Disclaimer.

Distribution Liability: The data represents the results of data collection/processing for a specific US Army Corps of Engineers activity and indicates the general existing conditions. As such, it is only valid for its intended use, content, time and accuracy specifications. The user is responsible for the results of any of the application of the data for other than its intended purpose.

U.S. ARMY CORPS OF ENGINEERS
MOBILE DISTRICT

Submitted: MCLENDON	Surveyed By: ___
Recommended: CALHOUN Lead, Navigation Support Section	Plotted By: ___
Approved: REGISTER Chief, Panama City Site Office	Checked By: ___

PANAMA CITY, FL
CF_19_PCE_20260723_CS
Panama City Outer Bar/Entrance
STA.415+00 - 444+00
CONDITION SURVEY

Sheet Reference Number
2 of 7

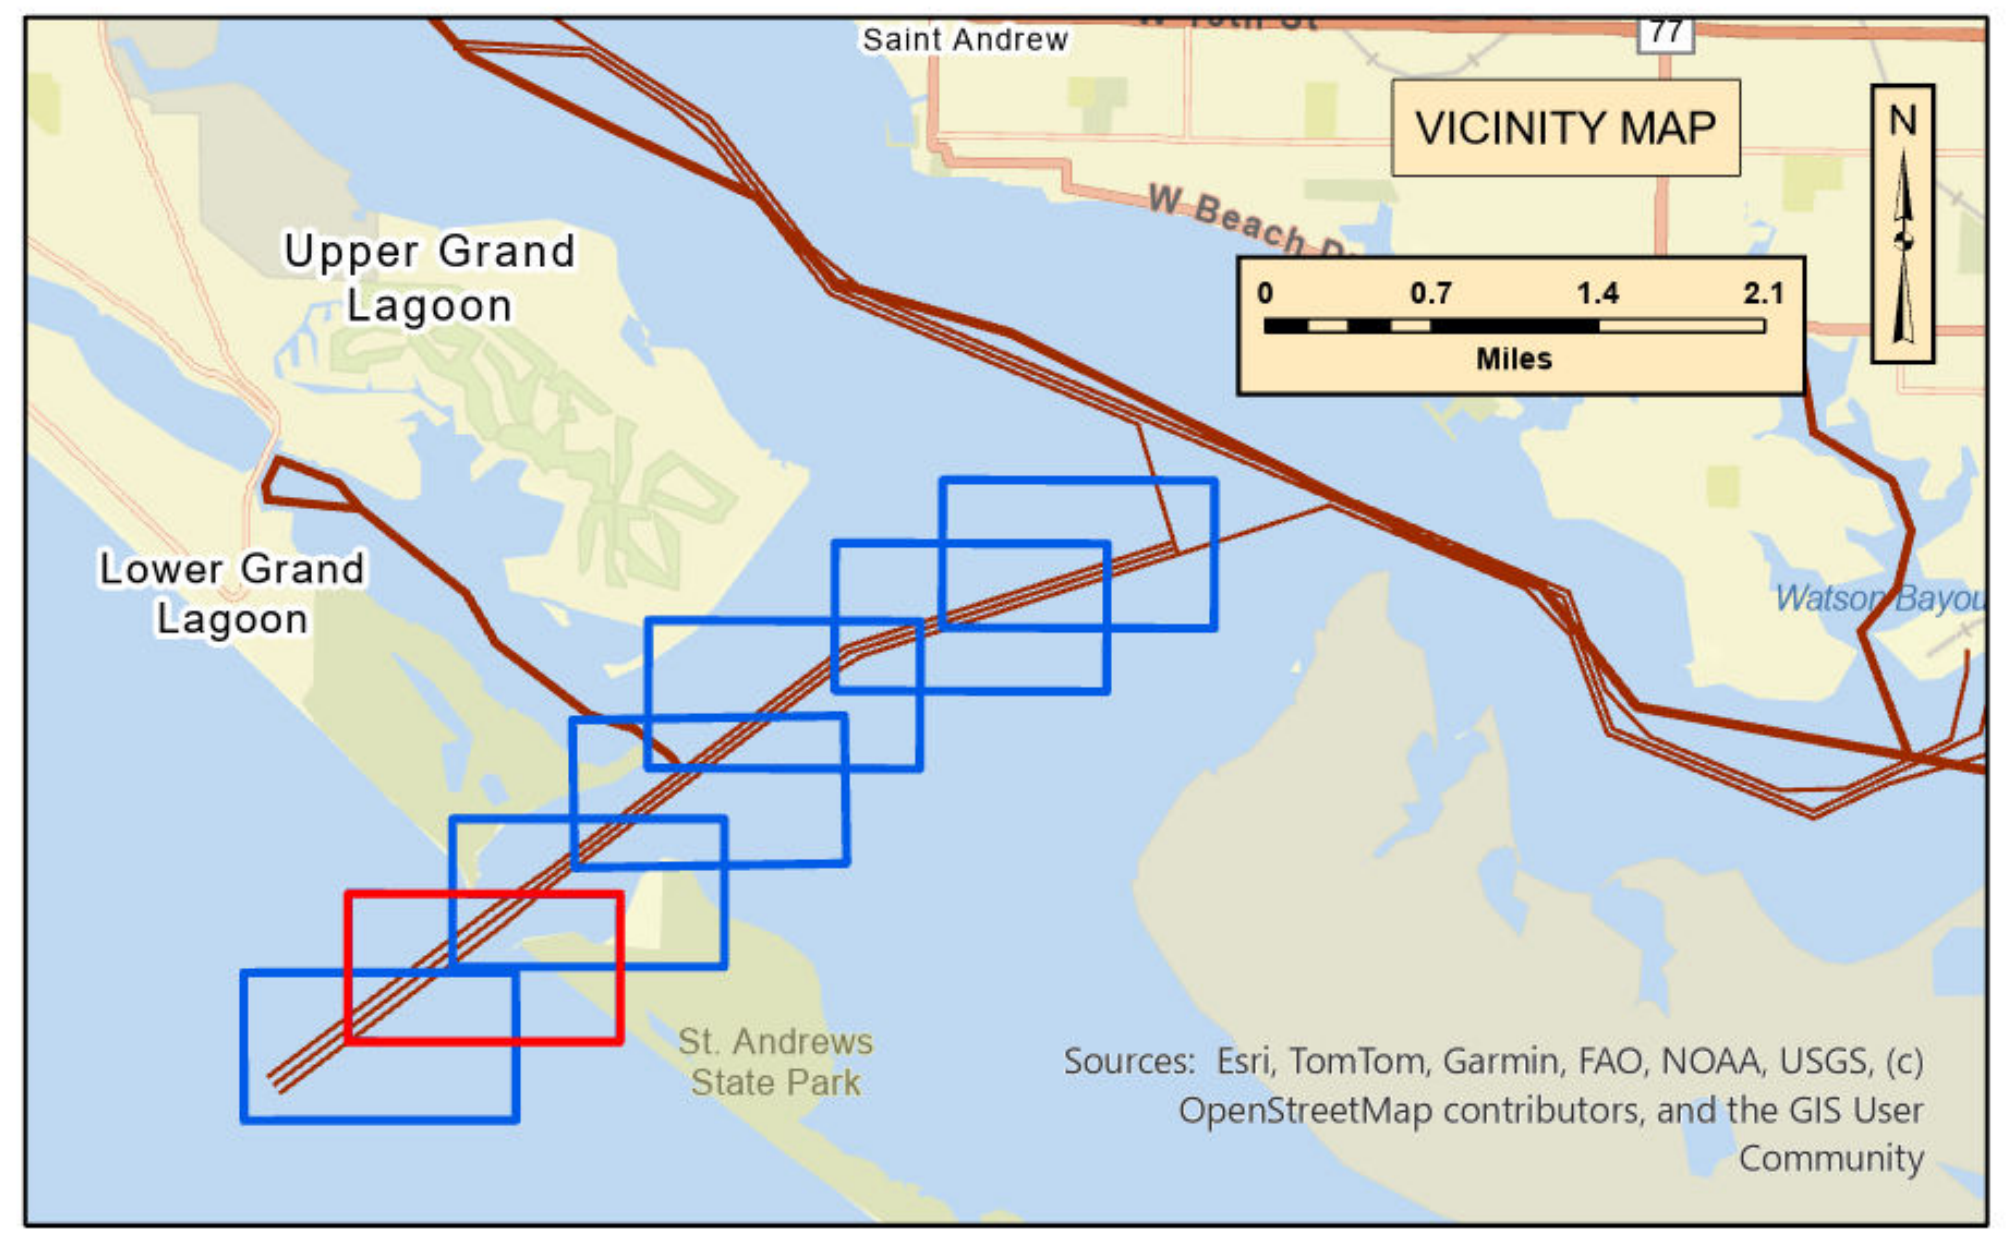

Sources: Esri, TomTom, Garmin, FAO, NOAA, USGS, (c) OpenStreetMap contributors, and the GIS User Community

☐ Daybeacon
▲ Daybeacon Even
🟩 Daybeacon Odd
Lighted Buoy
Lighted Buoy Even
Lighted Buoy Odd
Light
Light Even
Light Odd
Range Forward Light
Range Rear Light
Unlighted Buoy
Unlighted Buoy Even
Unlighted Buoy Odd
● Other Aid
Contour Lines
Depth Change

Bathymetry Depth
Value
🟥 6.59 - 36 ft (Entrance Channel)
🟥 36 - 38 ft (Outer Bar)
🟦 38 - 40 ft
🟦 40 - 45 ft
🟦 45 - 55 ft
🟦 55 - 65 ft
🟦 65 - 77.01 ft



NOTES:

1. ALL ELEVATIONS SHOWN ARE REFERENCED TO FEET BELOW MEAN LOWER LOW WATER (M.L.L.W.)
2. COORDINATES ARE REFERENCED TO FLORIDA STATE PLANE COORDINATE SYSTEM 83 DATUM NORTH ZONE.
3. SURVEYED BY:MCLENDON/YARBROUGH
4. SURVEY VESSEL:BLACKWATER
5. SURVEY DATE:07/24/2026
6. THE INFORMATION DEPICTED ON THIS MAP REPRESENTS THE RESULTS OF SURVEYS MADE ON THE DATES INDICATED AND CAN ONLY BE CONSIDERED AS INDICATING THE GENERAL CONDITIONS EXISTING AT THE TIME.
7. FREQUENCY SOUNDINGS: 450 KHz.
8. SOUNDINGS DEPICTED ON THIS MAP ARE BASED ON A 3' x 3' MEDIAN CELL, SORTED TO A 36' INTERVAL.
9.CONTOURS ON THIS MAP WERE GENERATED USING THE 3 x 3 DATA SET.

Imagery courtesy of: ESRI

US Army Corps of Engineers
District: CESAM

DISCLAIMER
Access Constraints: The United States Government furnishes these data and the recipient accepts and uses them with the express understanding that the US Government makes no warranties, expressed, or implied concerning the accuracy, completeness, readability, usability or suitability for any particular purpose of the information and the data furnished. The United States shall be under no liability whatsoever to any person by reason of any use made thereof. These data belong to the Government. Therefore the recipient fully agrees not to represent these data to anyone as other than Government provided data. The recipient may not transfer these data to others without also transferring this Disclaimer.

Distribution Liability: The data represents the results of data collection/processing for a specific US Army Corps of Engineers activity and indicates the general existing conditions. As such, it is only valid for its intended use, content, time and accuracy specifications. The user is responsible for the results of any of the application of the data for other than its intended purpose.

U.S. ARMY CORPS OF ENGINEERS
MOBILE DISTRICT

Submitted: MCLENDON
Recommended: CALHOUN
Lead, Navigation Support Section
Approved: REGISTER
Chief, Panama City Site Office

Surveyed By: ___
Plotted By: ___
Checked By: ___

PANAMA CITY, FL
CF_19_PCE_20260723_CS

Panama City Outer Bar/Entrance

STA.383+00 - 415+00

CONDITION SURVEY

Sheet Reference Number
3 of 7

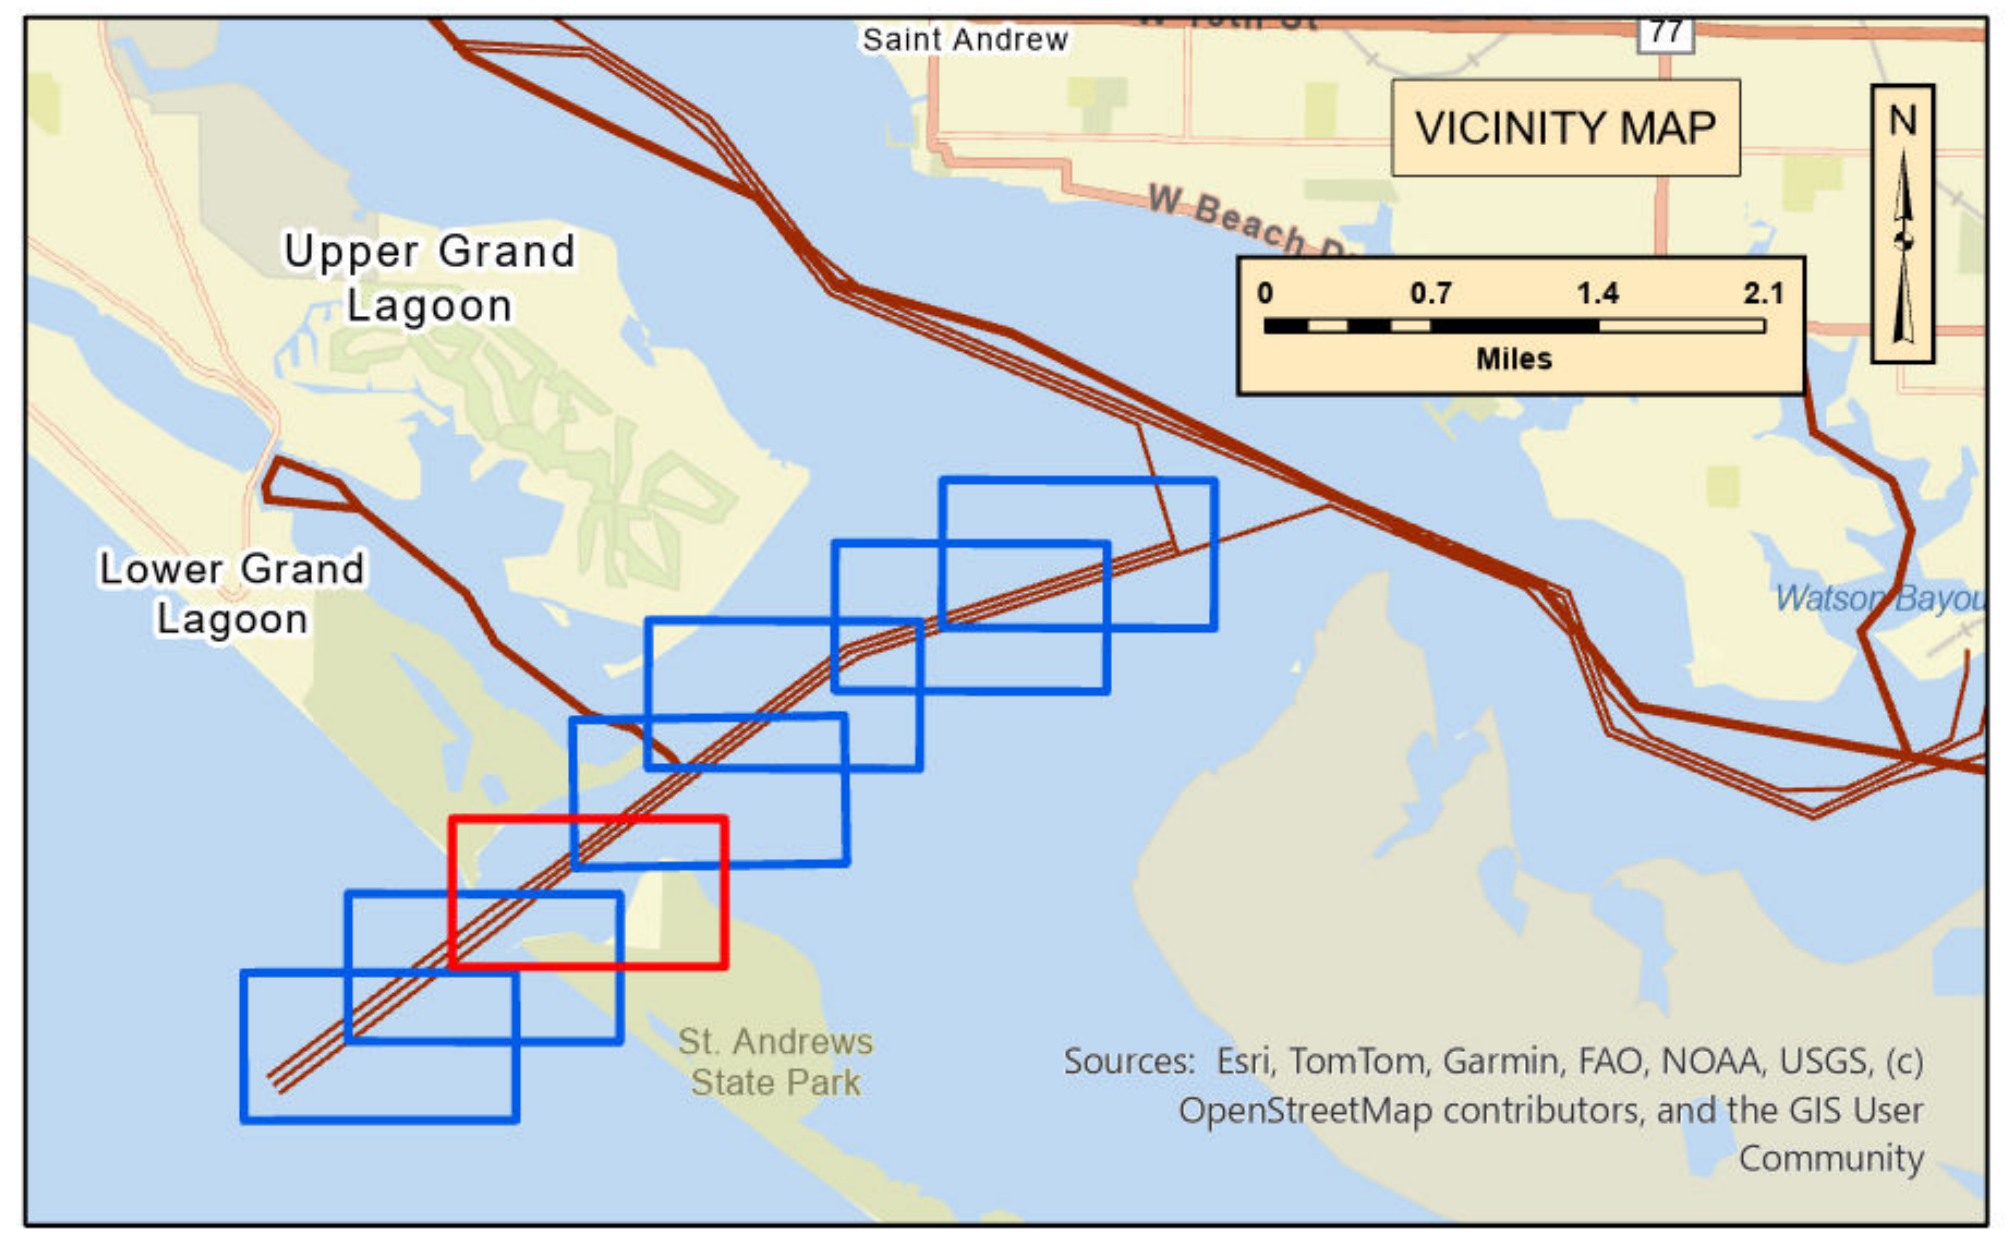

Sources: Esri, TomTom, Garmin, FAO, NOAA, USGS, (c) OpenStreetMap contributors, and the GIS User Community

- ☐ Daybeacon
- 🔺 Daybeacon Even
- 🟩 Daybeacon Odd
- Lighted Buoy
- Lighted Buoy Even
- Lighted Buoy Odd
- Light
- Light Even
- Light Odd
- Range Forward Light
- Range Rear Light
- Unlighted Buoy
- Unlighted Buoy Even
- Unlighted Buoy Odd
- ● Other Aid
- Contour Lines
- Depth Change

Bathymetry Depth
Value
- 🟥 6.59 - 36 ft (Entrance Channel)
- 🟥 36 - 38 ft (Outer Bar)
- 🟦 38 - 40 ft
- 🟦 40 - 45 ft
- 🟦 45 - 55 ft
- 🟦 55 - 65 ft
- 🟦 65 - 77.01 ft

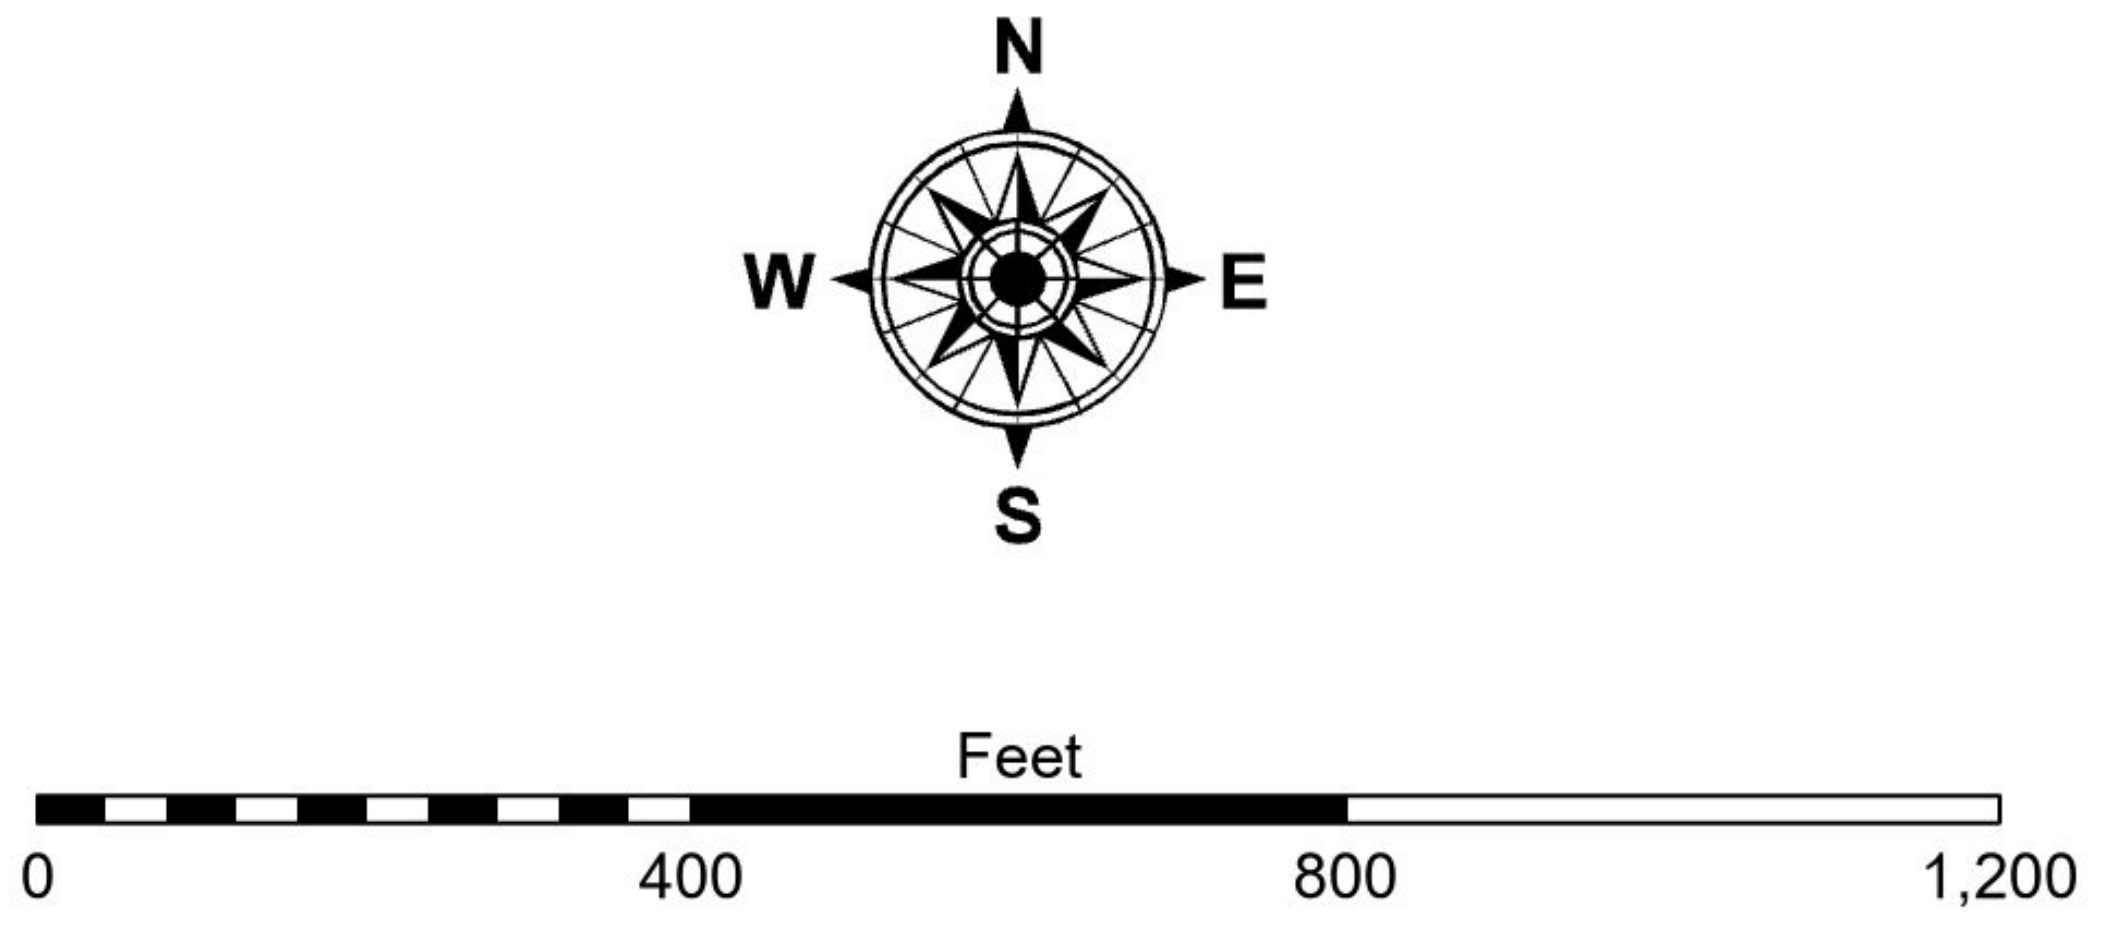

NOTES:

1. ALL ELEVATIONS SHOWN ARE REFERENCED TO FEET BELOW MEAN LOWER LOW WATER (M.L.L.W.)
2. COORDINATES ARE REFERENCED TO FLORIDA STATE PLANE COORDINATE SYSTEM 83 DATUM NORTH ZONE.
3. SURVEYED BY:MCLENDON/YARBROUGH
4. SURVEY VESSEL:BLACKWATER
5. SURVEY DATE:07/24/2026
6. THE INFORMATION DEPICTED ON THIS MAP REPRESENTS THE RESULTS OF SURVEYS MADE ON THE DATES INDICATED AND CAN ONLY BE CONSIDERED AS INDICATING THE GENERAL CONDITIONS EXISTING AT THE TIME.
7. FREQUENCY SOUNDINGS: 450 KHz.
8. SOUNDINGS DEPICTED ON THIS MAP ARE BASED ON A 3' x 3' MEDIAN CELL, SORTED TO A 36' INTERVAL.
9. CONTOURS ON THIS MAP WERE GENERATED USING THE 3 x 3 DATA SET.

Imagery courtesy of: ESRI

State of Florida, Microsoft, Vantor

US Army Corps of Engineers District: CESAM

DISCLAIMER
Access Constraints: The United States Government furnishes these data and the recipient accepts and uses them with the express understanding that the US Government makes no warranties, expressed, or implied concerning the accuracy, completeness, readability, usability or suitability for any particular purpose of the information and the data furnished. The United States shall be under no liability whatsoever to any person by reason of any use made thereof. These data belong to the Government. Therefore the recipient fully agrees not to represent these data to anyone as other than Government provided data. The recipient may not transfer these data to others without also transferring this Disclaimer.

Distribution Liability: The data represents the results of data collection/processing for a specific US Army Corps of Engineers activity and indicates the general existing conditions. As such, it is only valid for its intended use, content, time and accuracy specifications. The user is responsible for the results of any of the application of the data for other than its intended purpose.

U.S. ARMY CORPS OF ENGINEERS
MOBILE DISTRICT

Submitted: MCLENDON
Recommended: CALHOUN
Lead, Navigation Support Section
Approved: REGISTER
Chief, Panama City Site Office

Surveyed By: ___
Plotted By: ___
Checked By: ___

PANAMA CITY, FL
CF_19_PCE_20260723_CS
Panama City Outer Bar/Entrance
STA.345+00 - 383+00
CONDITION SURVEY

Sheet Reference Number
4 of 7

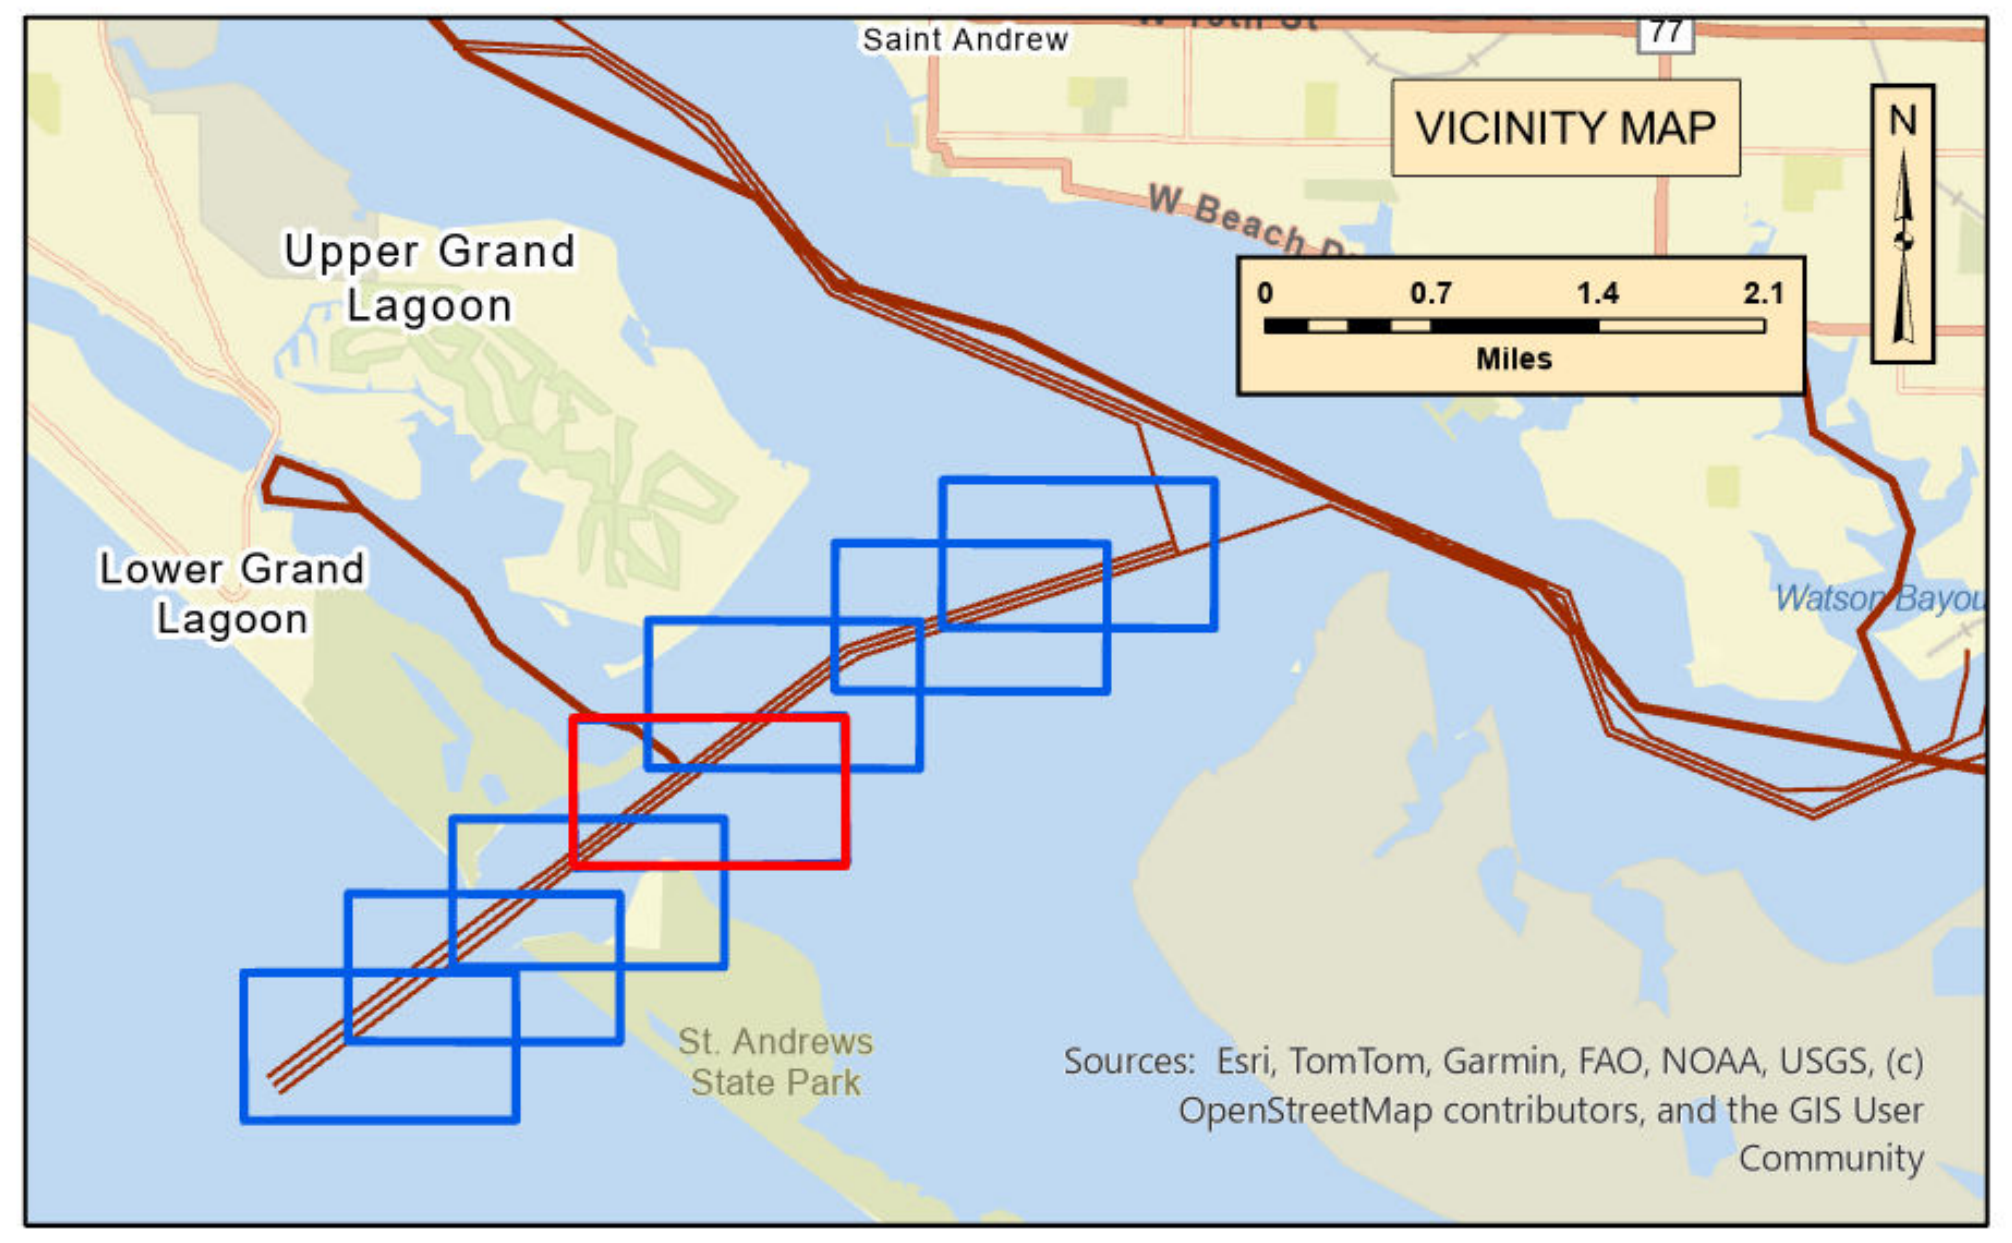

Sources: Esri, TomTom, Garmin, FAO, NOAA, USGS, (c) OpenStreetMap contributors, and the GIS User Community

- ☐ Daybeacon
- ▲ Daybeacon Even
- 🟩 Daybeacon Odd
- Lighted Buoy
- Lighted Buoy Even
- Lighted Buoy Odd
- Light
- Light Even
- Light Odd
- Range Forward Light
- Range Rear Light
- Unlighted Buoy
- Unlighted Buoy Even
- Unlighted Buoy Odd
- ● Other Aid
- Contour Lines
- Depth Change

Bathymetry Depth
Value
- 🟥 6.59 - 36 ft (Entrance Channel)
- 🟥 36 - 38 ft (Outer Bar)
- 🟦 38 - 40 ft
- 🟦 40 - 45 ft
- 🟦 45 - 55 ft
- 🟦 55 - 65 ft
- 🟦 65 - 77.01 ft



NOTES:

1. ALL ELEVATIONS SHOWN ARE REFERENCED TO FEET BELOW MEAN LOWER LOW WATER (M.L.L.W.)
2. COORDINATES ARE REFERENCED TO FLORIDA STATE PLANE COORDINATE SYSTEM 83 DATUM NORTH ZONE.
3. SURVEYED BY:MCLENDON/YARBROUGH
4. SURVEY VESSEL:BLACKWATER
5. SURVEY DATE:07/24/2026
6. THE INFORMATION DEPICTED ON THIS MAP REPRESENTS THE RESULTS OF SURVEYS MADE ON THE DATES INDICATED AND CAN ONLY BE CONSIDERED AS INDICATING THE GENERAL CONDITIONS EXISTING AT THE TIME.
7. FREQUENCY SOUNDINGS: 450 KHz.
8. SOUNDINGS DEPICTED ON THIS MAP ARE BASED ON A 3' x 3' MEDIAN CELL, SORTED TO A 36' INTERVAL.
9.CONTOURS ON THIS MAP WERE GENERATED USING THE 3 x 3 DATA SET.

Imagery courtesy of: ESRI

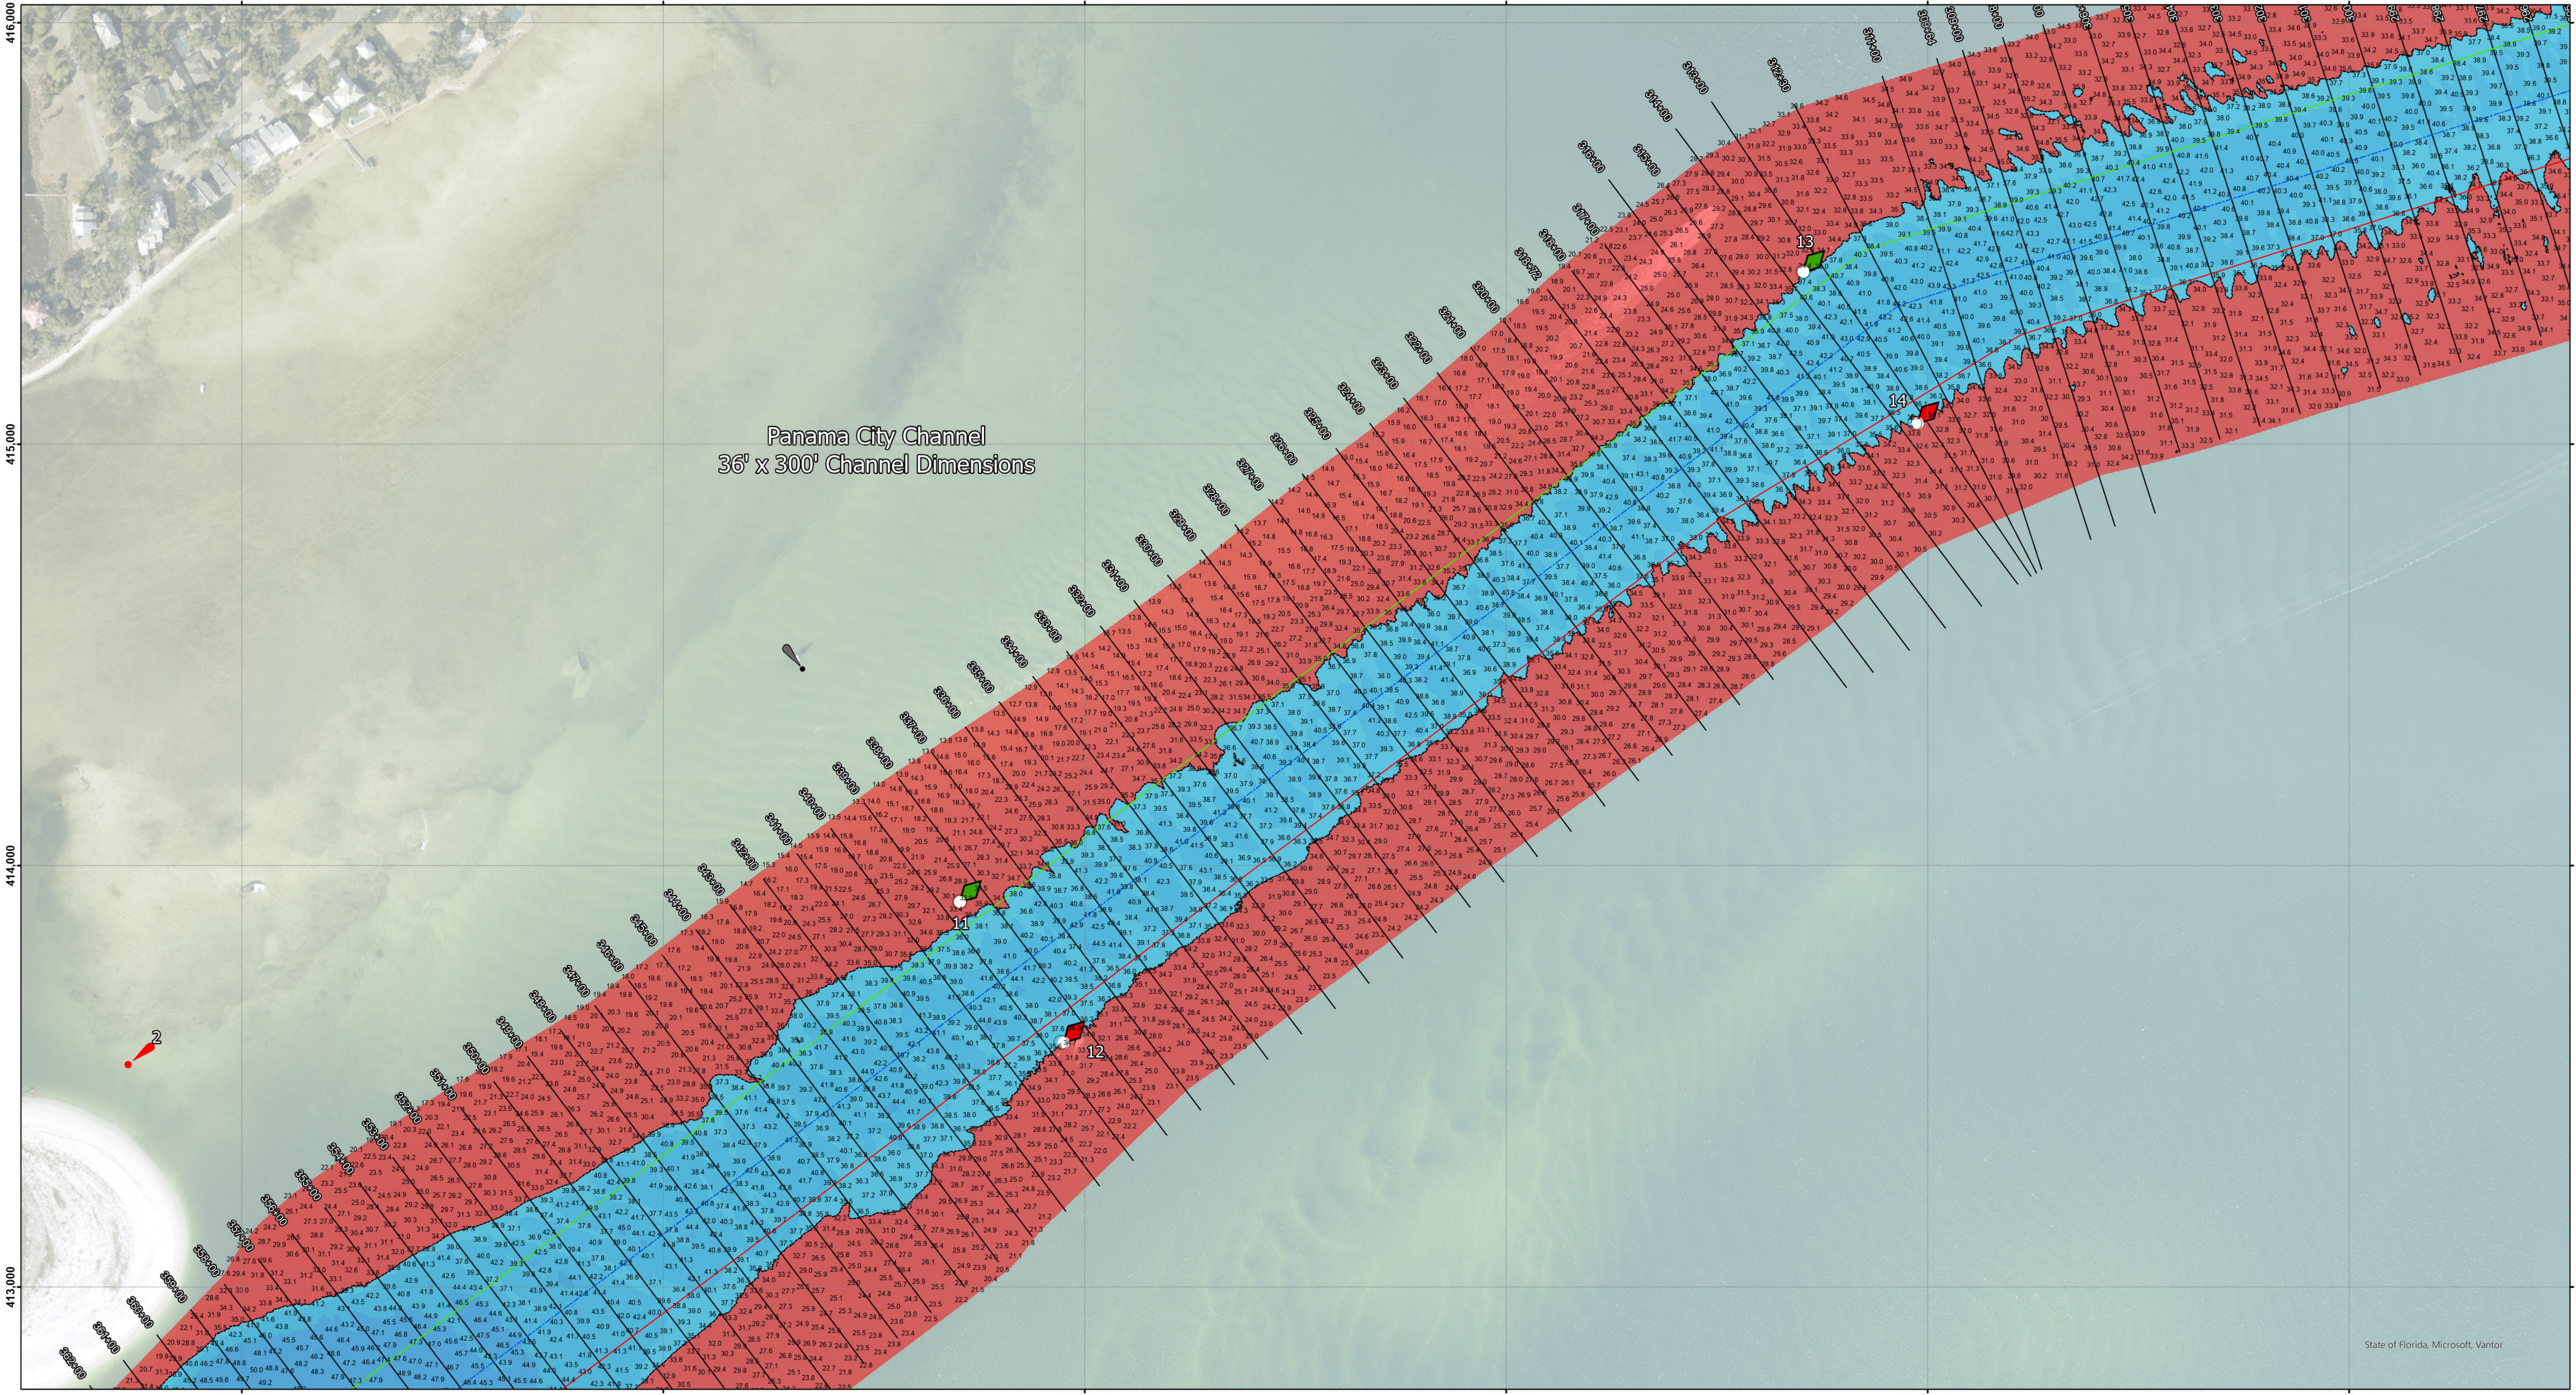

US Army Corps
of Engineers
District: CESAM

DISCLAIMER
Access Constraints: The United States Government furnishes these data and the recipient accepts and uses them with the express understanding that the US Government makes no warranties, expressed, or implied concerning the accuracy, completeness, readability, usability or suitability for any particular purpose of the information and the data furnished. The United States shall be under no liability whatsoever to any person by reason of any use made thereof. These data belong to the Government. Therefore the recipient fully agrees not to represent these data to anyone as other than Government provided data. The recipient may not transfer these data to others without also transferring this Disclaimer.

Distribution Liability: The data represents the results of data collection/processing for a specific US Army Corps of Engineers activity and indicates the general existing conditions. As such, it is only valid for its intended use, content, time and accuracy specifications. The user is responsible for the results of any of the application of the data for other than its intended purpose.

U.S. ARMY CORPS OF ENGINEERS
MOBILE DISTRICT

Submitted: MCLENDON	Surveyed By: ___
Recommended: CALHOUN Lead, Navigation Support Section	Plotted By: ___
Approved: REGISTER Chief, Panama City Site Office	Checked By: ___

PANAMA CITY, FL
CF_19_PCE_20260723_CS
Panama City Outer Bar/Entrance
STA.311+00 - 345+00
CONDITION SURVEY

Sheet Reference Number
5 of 7

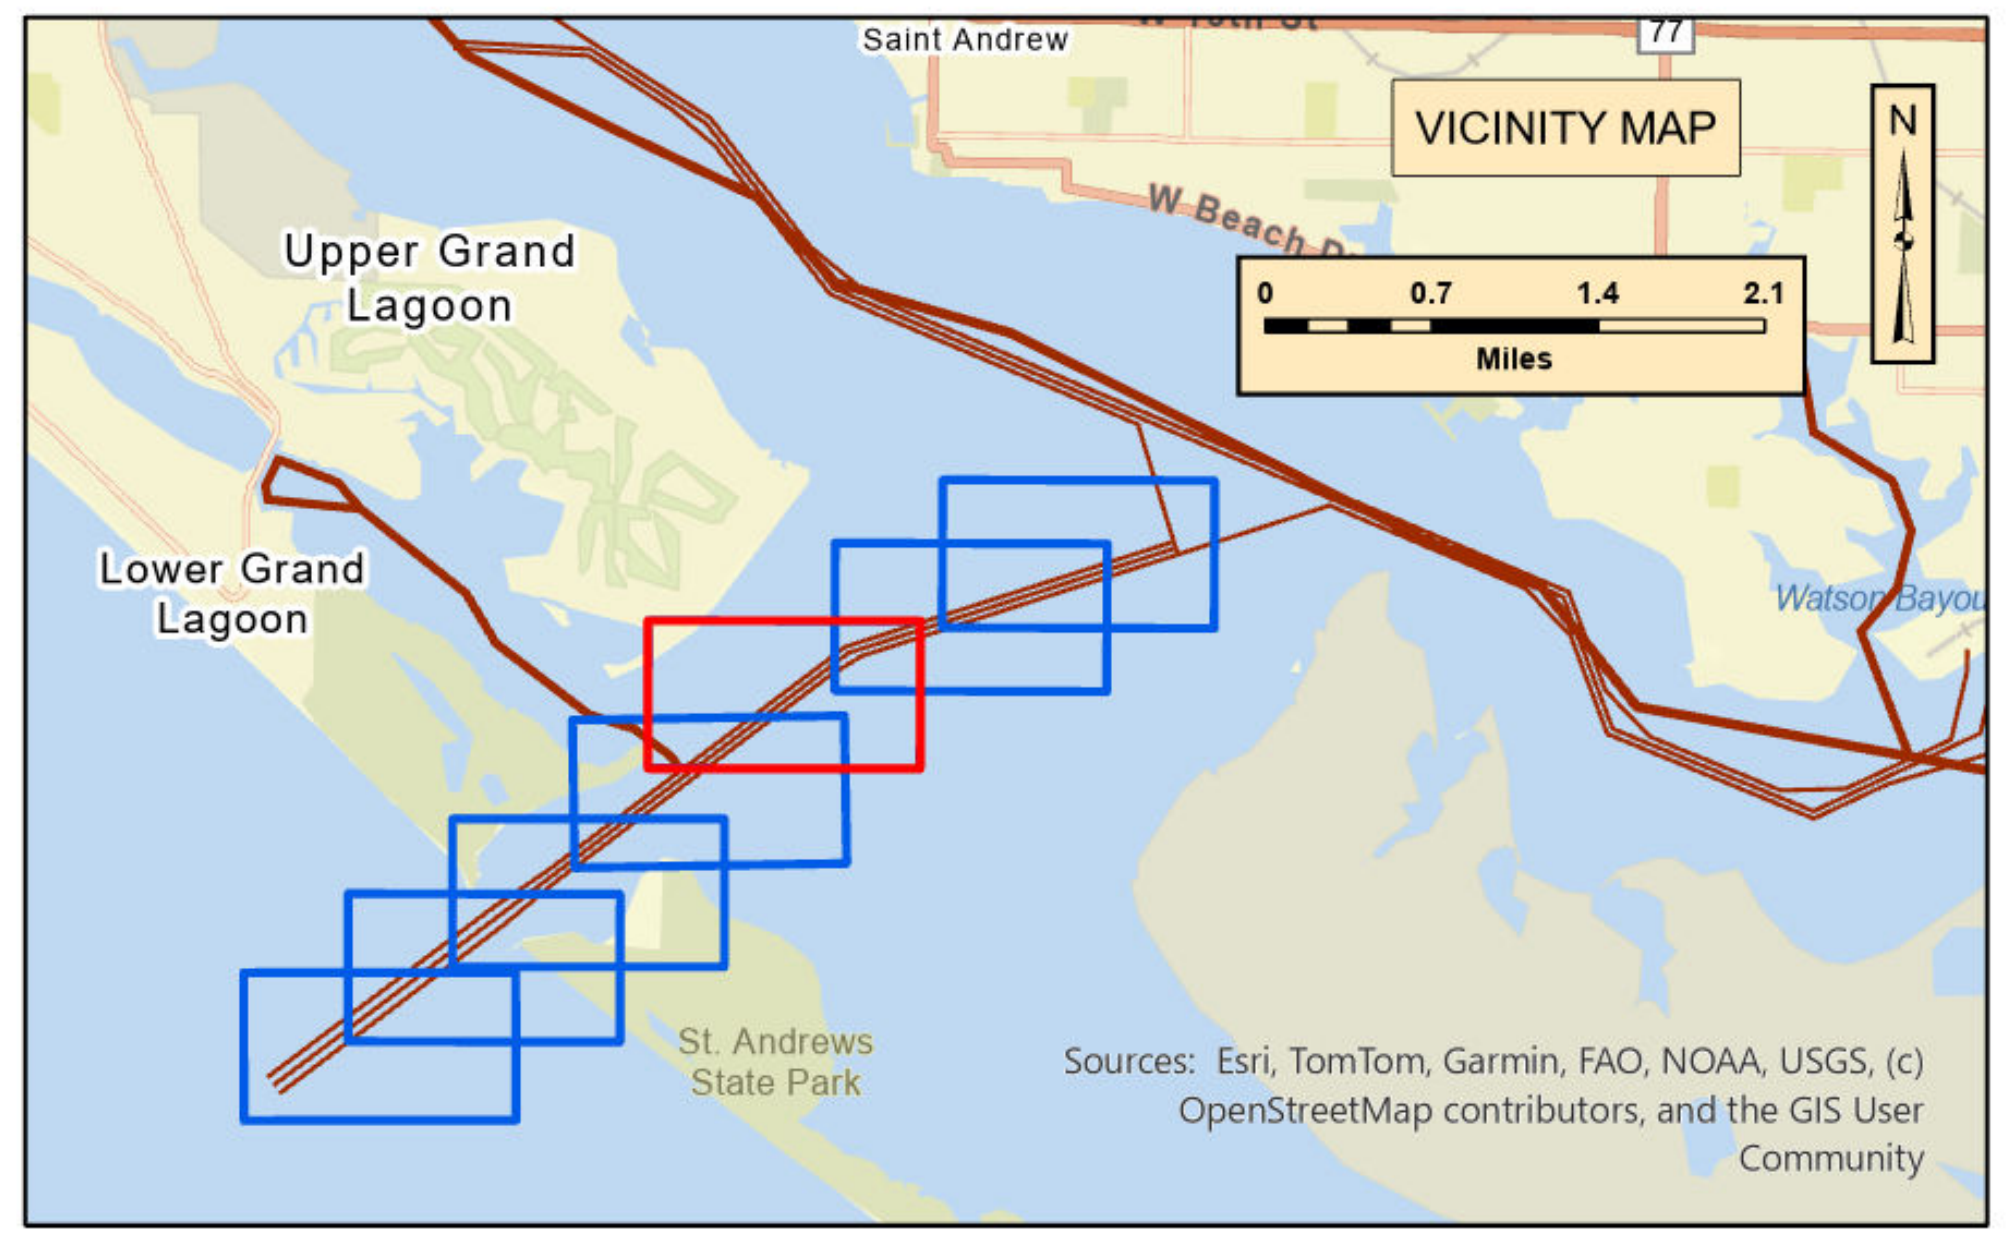

☐ Daybeacon
▲ Daybeacon Even
🟩 Daybeacon Odd
Lighted Buoy
Lighted Buoy Even
Lighted Buoy Odd
Light
Light Even
Light Odd
Range Forward Light
Range Rear Light
Unlighted Buoy
Unlighted Buoy Even
Unlighted Buoy Odd
● Other Aid
---- Contour Lines
— Depth Change

Bathymetry Depth
Value

🟥	6.59 - 36 ft (Entrance Channel)
🟥	36 - 38 ft (Outer Bar)
🟦	38 - 40 ft
🟦	40 - 45 ft
🟦	45 - 55 ft
🟦	55 - 65 ft
🟦	65 - 77.01 ft

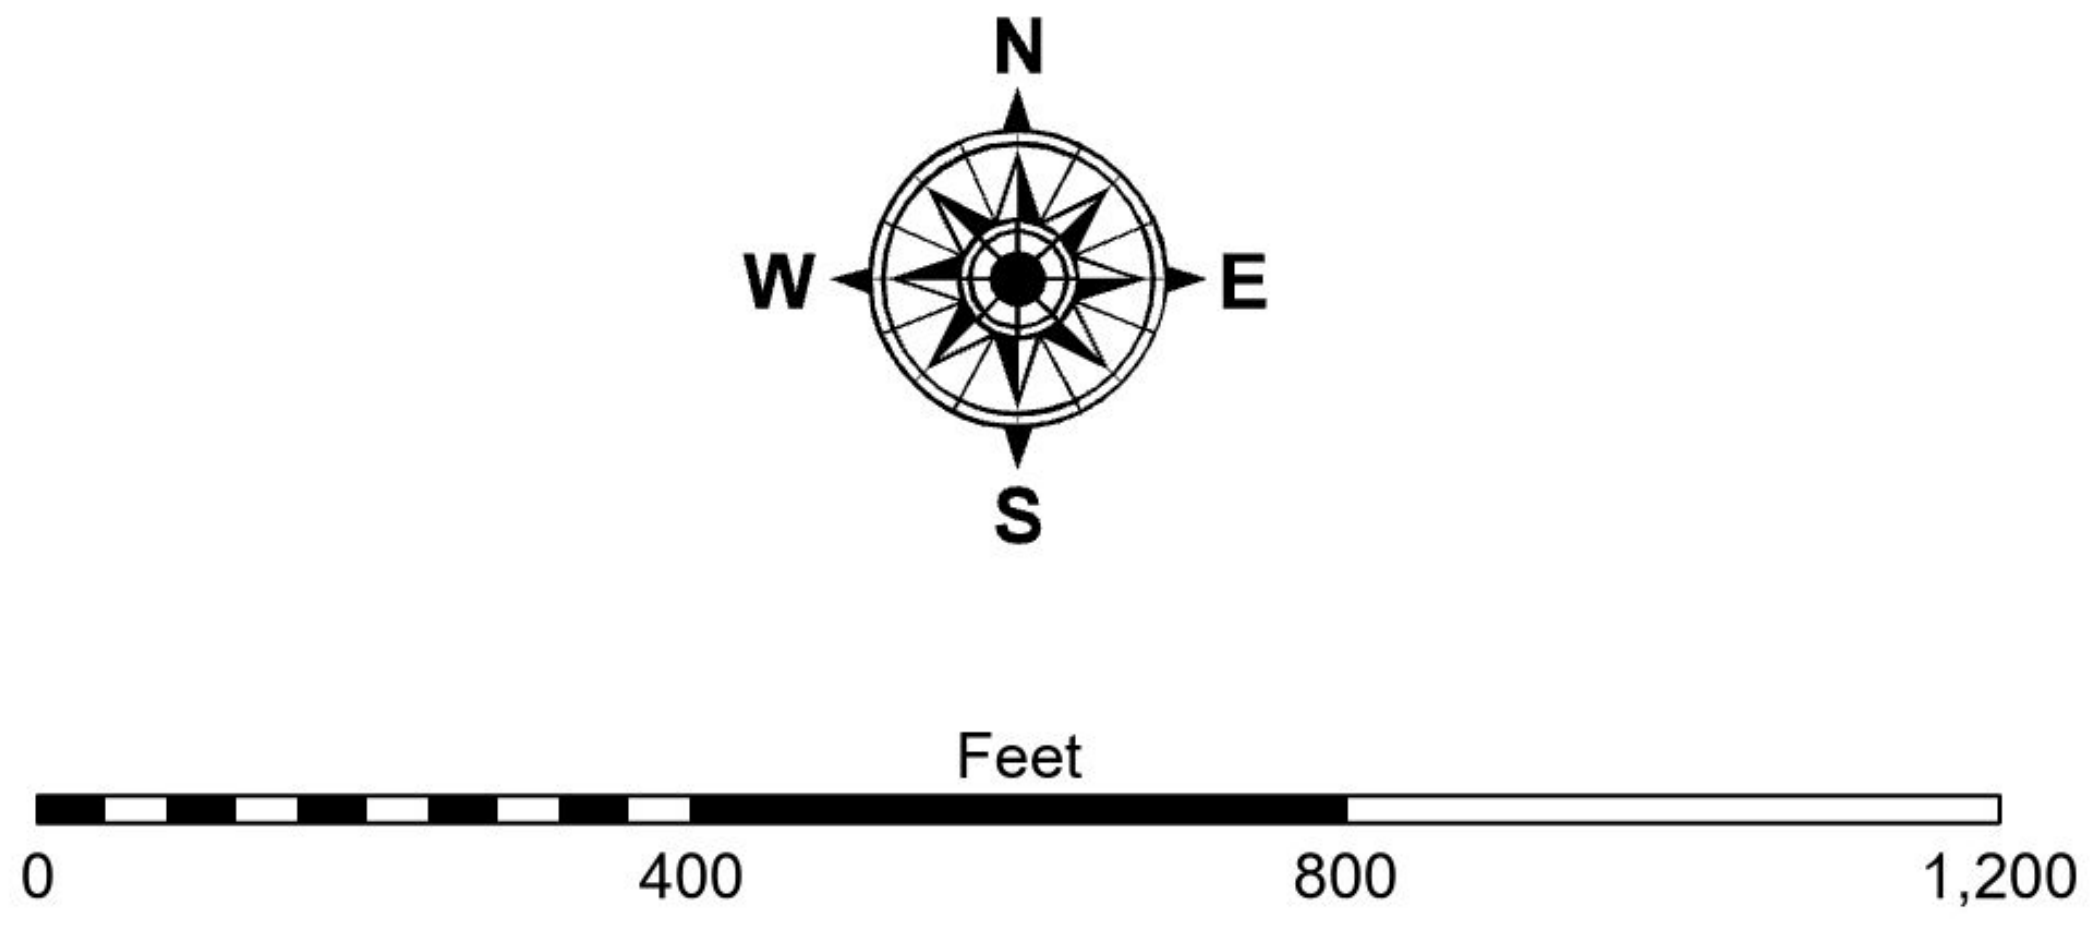

NOTES:

1. ALL ELEVATIONS SHOWN ARE REFERENCED TO FEET BELOW MEAN LOWER LOW WATER (M.L.L.W.)
2. COORDINATES ARE REFERENCED TO FLORIDA STATE PLANE COORDINATE SYSTEM 83 DATUM NORTH ZONE.
3. SURVEYED BY:MCLENDON/YARBROUGH
4. SURVEY VESSEL:BLACKWATER
5. SURVEY DATE:07/24/2026
6. THE INFORMATION DEPICTED ON THIS MAP REPRESENTS THE RESULTS OF SURVEYS MADE ON THE DATES INDICATED AND CAN ONLY BE CONSIDERED AS INDICATING THE GENERAL CONDITIONS EXISTING AT THE TIME.
7. FREQUENCY SOUNDINGS: 450 KHz.
8. SOUNDINGS DEPICTED ON THIS MAP ARE BASED ON A 3' x 3' MEDIAN CELL, SORTED TO A 36' INTERVAL.
9. CONTOURS ON THIS MAP WERE GENERATED USING THE 3 x 3 DATA SET.

Imagery courtesy of: ESRI

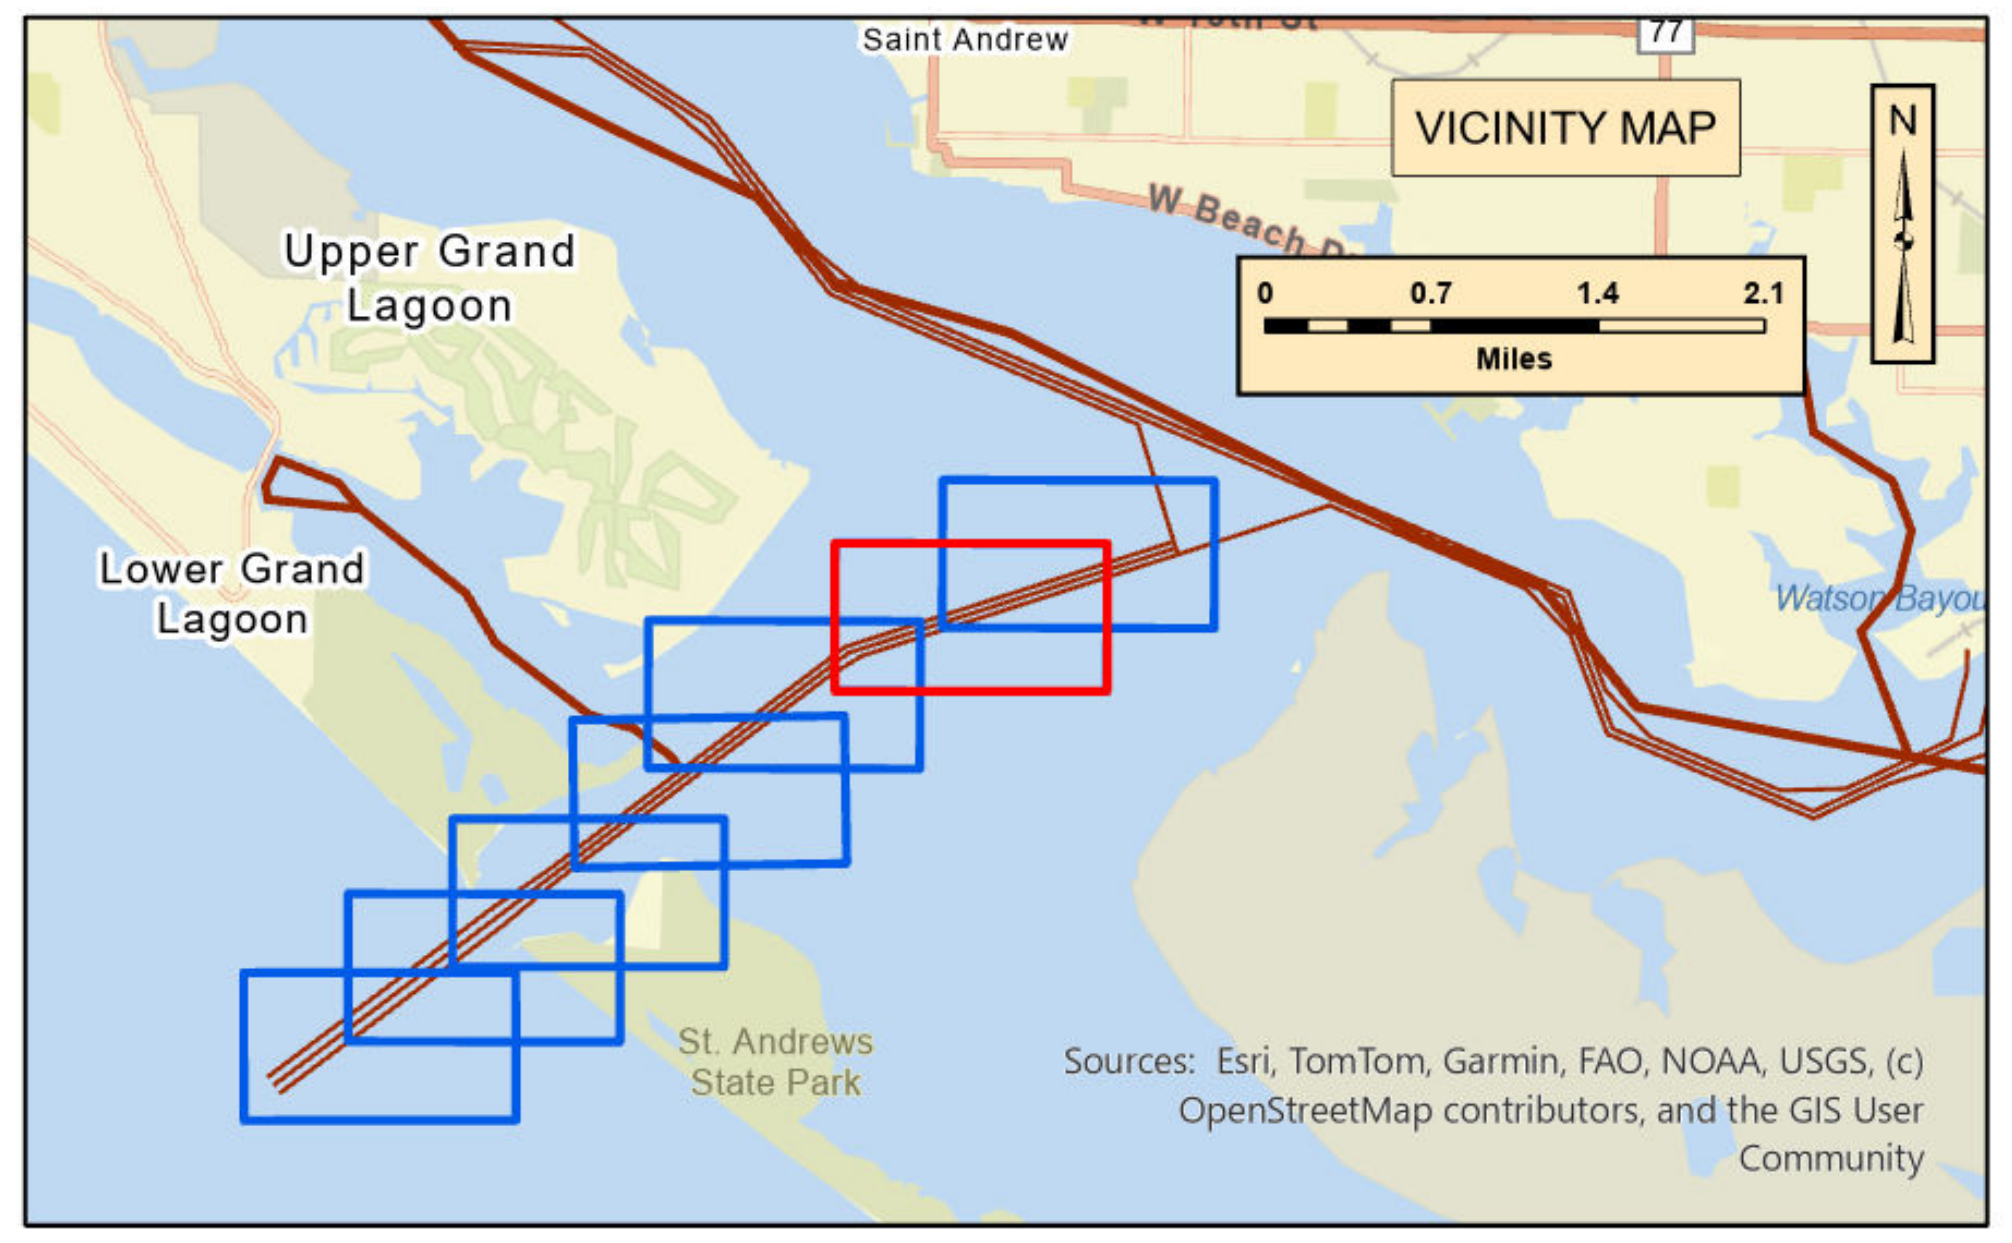

Sources: Esri, TomTom, Garmin, FAO, NOAA, USGS, (c) OpenStreetMap contributors, and the GIS User Community

- ☐ Daybeacon
- ▲ Daybeacon Even
- 🟩 Daybeacon Odd
- Lighted Buoy
- Lighted Buoy Even
- Lighted Buoy Odd
- Light
- Light Even
- Light Odd
- Range Forward Light
- Range Rear Light
- Unlighted Buoy
- Unlighted Buoy Even
- Unlighted Buoy Odd
- ● Other Aid
- Contour Lines
- Depth Change

Bathymetry Depth

Value

- 🟥 6.59 - 36 ft (Entrance Channel)
- 🟥 36 - 38 ft (Outer Bar)
- 🟦 38 - 40 ft
- 🟦 40 - 45 ft
- 🟦 45 - 55 ft
- 🟦 55 - 65 ft
- 🟦 65 - 77.01 ft

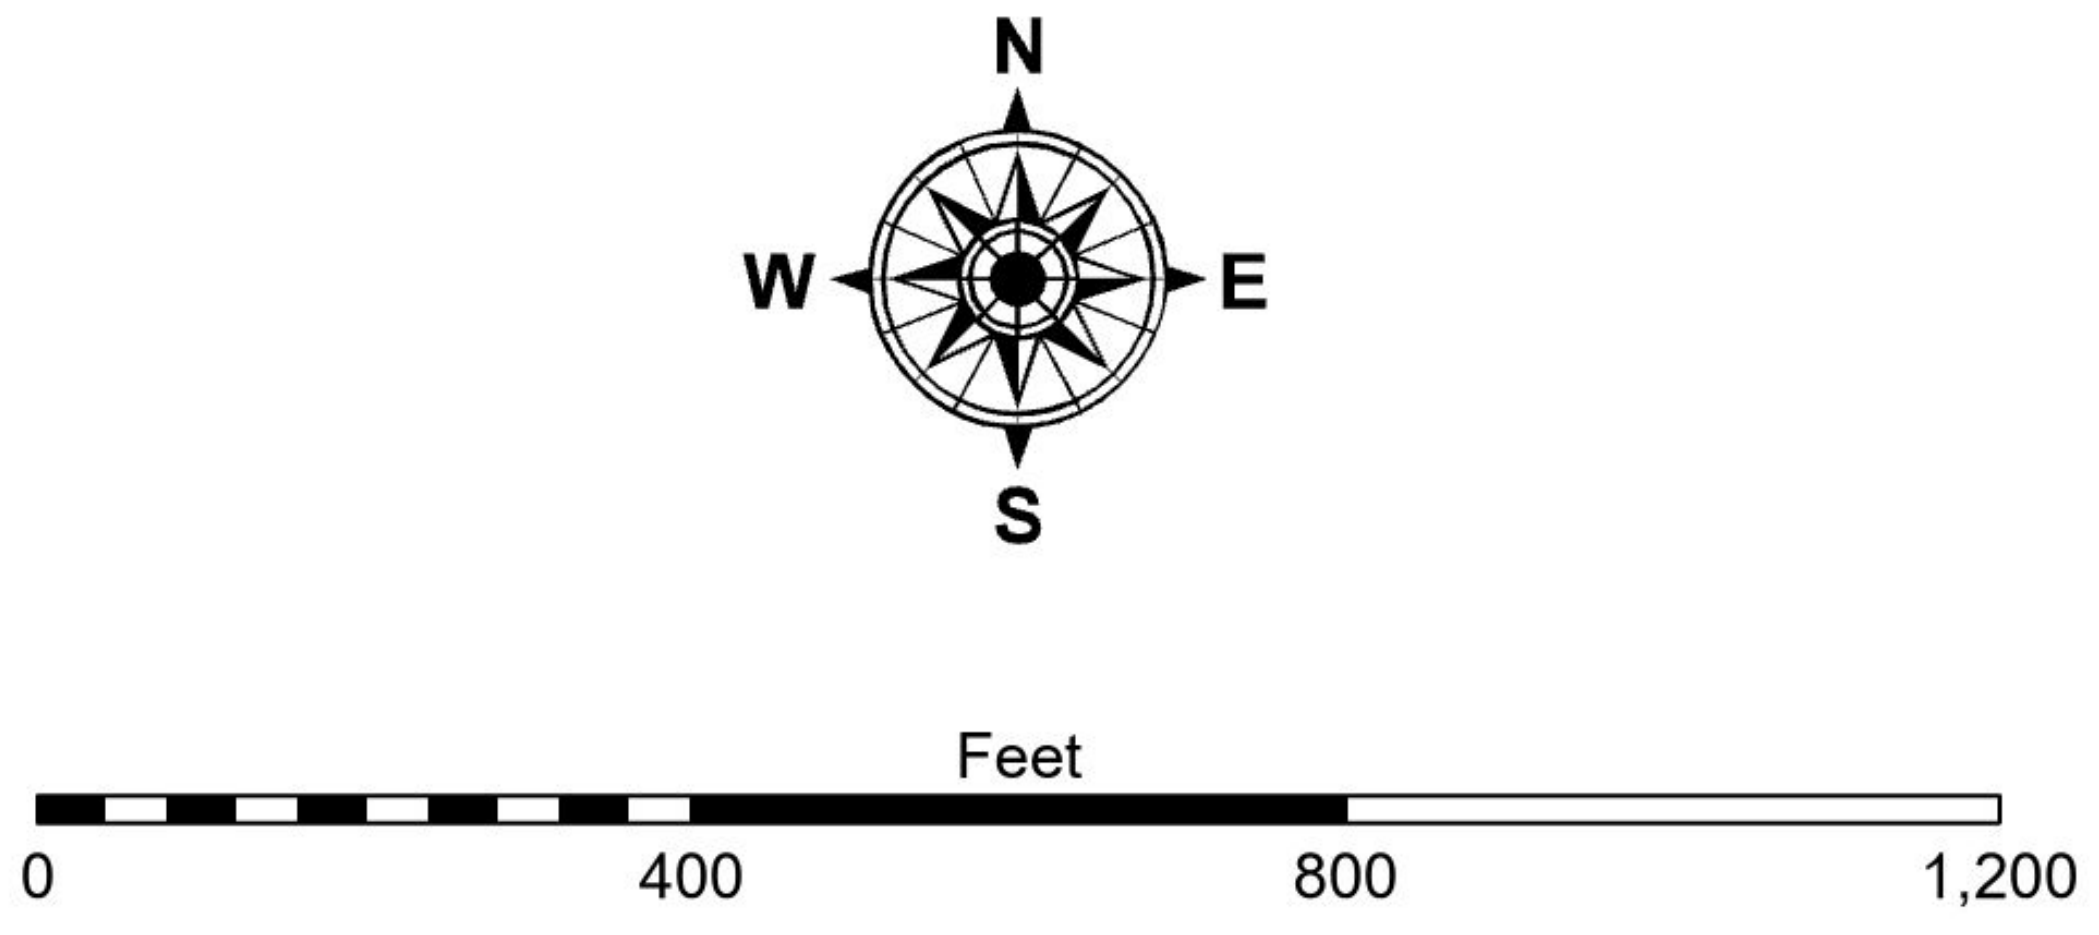

NOTES:

1. ALL ELEVATIONS SHOWN ARE REFERENCED TO FEET BELOW MEAN LOWER LOW WATER (M.L.L.W.)
2. COORDINATES ARE REFERENCED TO FLORIDA STATE PLANE COORDINATE SYSTEM 83 DATUM NORTH ZONE.
3. SURVEYED BY:MCLENDON/YARBROUGH
4. SURVEY VESSEL:BLACKWATER
5. SURVEY DATE:07/24/2026
6. THE INFORMATION DEPICTED ON THIS MAP REPRESENTS THE RESULTS OF SURVEYS MADE ON THE DATES INDICATED AND CAN ONLY BE CONSIDERED AS INDICATING THE GENERAL CONDITIONS EXISTING AT THE TIME.
7. FREQUENCY SOUNDINGS: 450 KHz.
8. SOUNDINGS DEPICTED ON THIS MAP ARE BASED ON A 3' x 3' MEDIAN CELL, SORTED TO A 36' INTERVAL.
9. CONTOURS ON THIS MAP WERE GENERATED USING THE 3 x 3 DATA SET.

Imagery courtesy of: ESRI

US Army Corps of Engineers
District: CESAM

DISCLAIMER
Access Constraints: The United States Government furnishes these data and the recipient accepts and uses them with the express understanding that the US Government makes no warranties, expressed, or implied concerning the accuracy, completeness, readability, usability or suitability for any particular purpose of the information and the data furnished. The United States shall be under no liability whatsoever to any person by reason of any use made thereof. These data belong to the Government. Therefore the recipient fully agrees not to represent these data to anyone as other than Government provided data. The recipient may not transfer these data to others without also transferring this Disclaimer.

Distribution Liability: The data represents the results of data collection/processing for a specific US Army Corps of Engineers activity and indicates the general existing conditions. As such, it is only valid for its intended use, content, time and accuracy specifications. The user is responsible for the results of any of the application of the data for other than its intended purpose.

U.S. ARMY CORPS OF ENGINEERS
MOBILE DISTRICT

Submitted: MCLENDON	Surveyed By:
Recommended: CALHOUN Lead, Navigation Support Section	Plotted By:
Approved: REGISTER Chief, Panama City Site Office	Checked By:

PANAMA CITY, FL
CF_19_PCE_20260723_CS
Panama City Outer Bar/Entrance
STA.255+00 - 311+00
CONDITION SURVEY

Sheet
Reference
Number
6 of 7

US Army Corps of Engineers
District: CESAM

DISCLAIMER
Access Constraints: The United States Government furnishes these data and the recipient accepts and uses them with the express understanding that the US Government makes no warranties, expressed, or implied concerning the accuracy, completeness, readability, usability or suitability for any particular purpose of the information and the data furnished. The United States shall be under no liability whatsoever to any person by reason of any use made thereof. These data belong to the Government. Therefore the recipient fully agrees not to represent these data to anyone as other than Government provided data. The recipient may not transfer these data to others without also transferring this Disclaimer.

Distribution Liability: The data represents the results of data collection/processing for a specific US Army Corps of Engineers activity and indicates the general existing conditions. As such, it is only valid for its intended use, content, time and accuracy specifications. The user is responsible for the results of any of the application of the data for other than its intended purpose.

U.S. ARMY CORPS OF ENGINEERS
MOBILE DISTRICT

Submitted: MCLENDON	Surveyed By:
Recommended: CALHOUN Lead, Navigation Support Section	Plotted By:
Approved: REGISTER Chief, Panama City Site Office	Checked By:

PANAMA CITY, FL
CF_19_PCE_20260723_CS
Panama City Outer Bar/Entrance
STA.236+00 - 276+00
CONDITION SURVEY

Sheet Reference Number
7 of 7

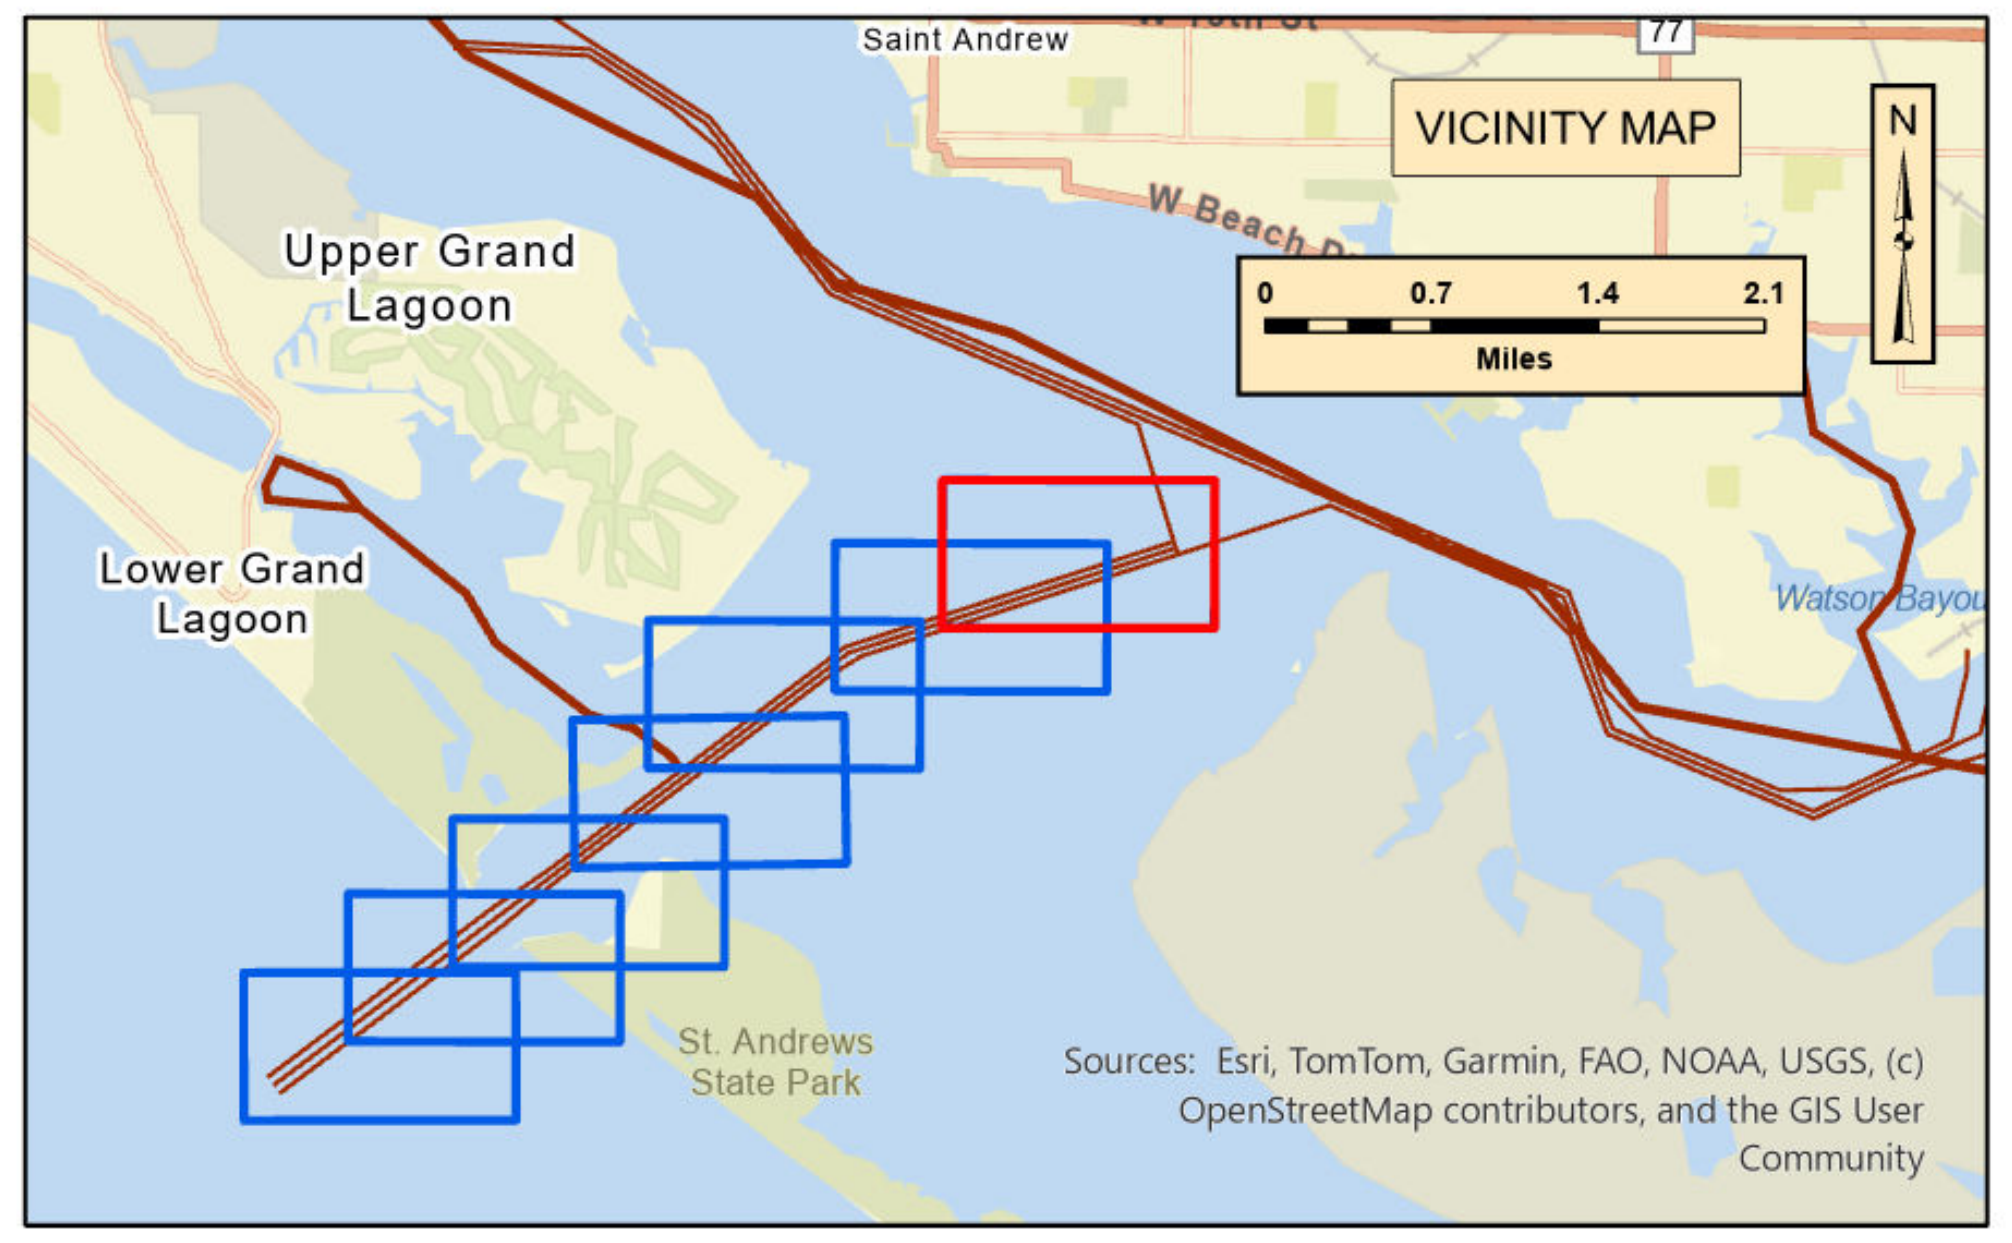

Sources: Esri, TomTom, Garmin, FAO, NOAA, USGS, (c) OpenStreetMap contributors, and the GIS User Community

- ☐ Daybeacon
- ▲ Daybeacon Even
- 🟩 Daybeacon Odd
- Lighted Buoy
- Lighted Buoy Even
- Lighted Buoy Odd
- Light
- Light Even
- Light Odd
- Range Forward Light
- Range Rear Light
- Unlighted Buoy
- Unlighted Buoy Even
- Unlighted Buoy Odd
- ● Other Aid
- Contour Lines
- Depth Change

Bathymetry Depth

Value

- 🟥 6.59 - 36 ft (Entrance Channel)
- 🟥 36 - 38 ft (Outer Bar)
- 🟦 38 - 40 ft
- 🟦 40 - 45 ft
- 🟦 45 - 55 ft
- 🟦 55 - 65 ft
- 🟦 65 - 77.01 ft

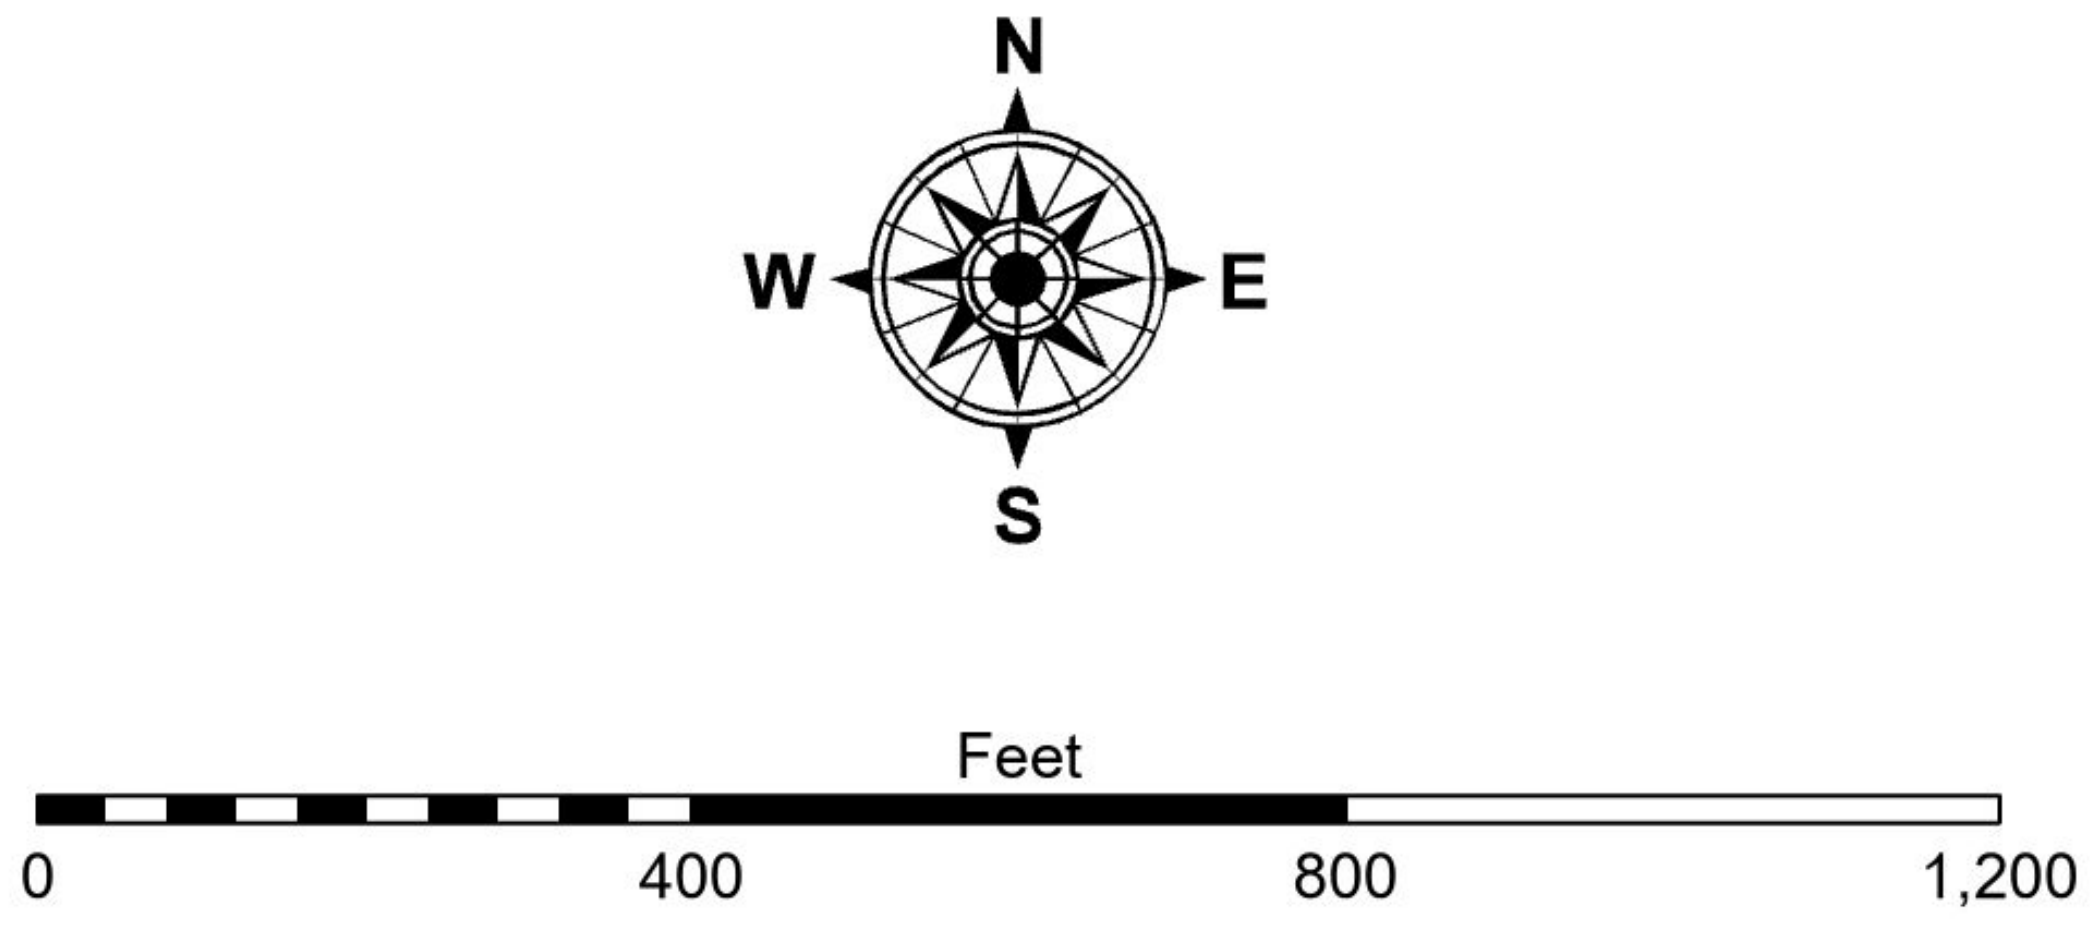

NOTES:

1. ALL ELEVATIONS SHOWN ARE REFERENCED TO FEET BELOW MEAN LOWER LOW WATER (M.L.L.W.)
2. COORDINATES ARE REFERENCED TO FLORIDA STATE PLANE COORDINATE SYSTEM 83 DATUM NORTH ZONE.
3. SURVEYED BY:MCLENDON/YARBROUGH
4. SURVEY VESSEL:BLACKWATER
5. SURVEY DATE:07/24/2026
6. THE INFORMATION DEPICTED ON THIS MAP REPRESENTS THE RESULTS OF SURVEYS MADE ON THE DATES INDICATED AND CAN ONLY BE CONSIDERED AS INDICATING THE GENERAL CONDITIONS EXISTING AT THE TIME.
7. FREQUENCY SOUNDINGS: 450 KHz.
8. SOUNDINGS DEPICTED ON THIS MAP ARE BASED ON A 3' x 3' MEDIAN CELL, SORTED TO A 36' INTERVAL.
9. CONTOURS ON THIS MAP WERE GENERATED USING THE 3 x 3 DATA SET.

Imagery courtesy of: ESRI