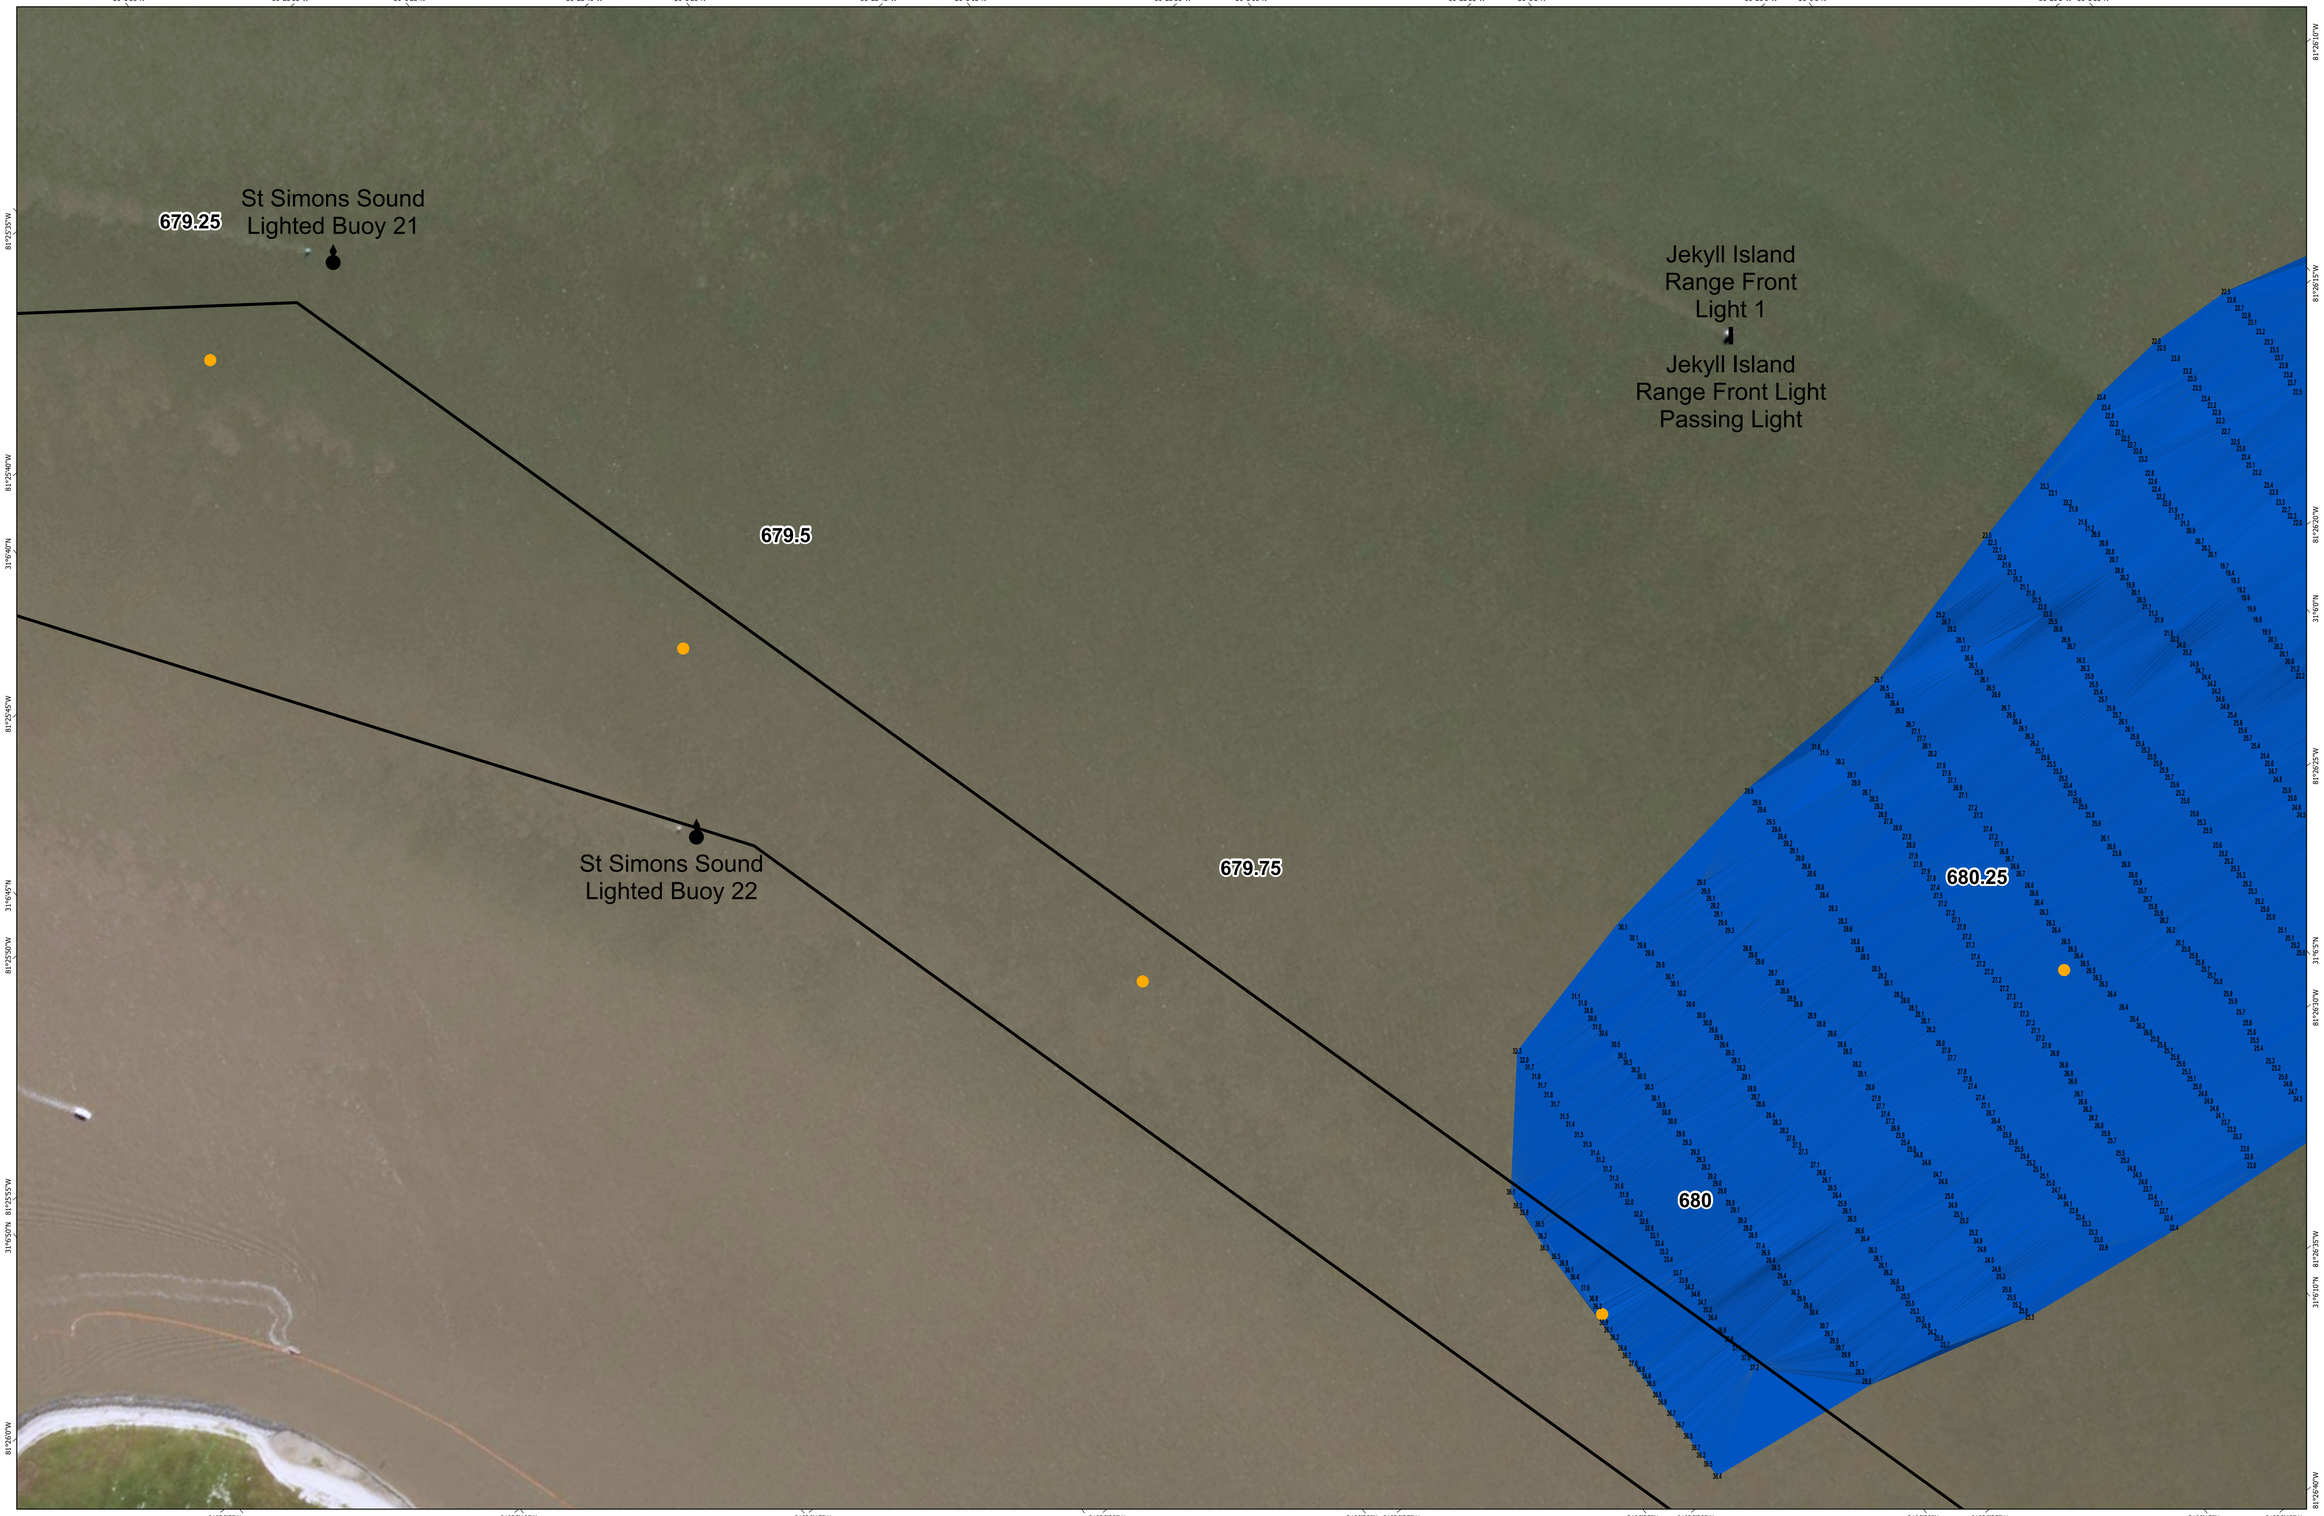


Elevation

15 and Deeper	8 - 10
14 - 15	7 - 8
12 - 14	6 - 7
10 - 12	4 - 6
	4 and Shallower

Buoy
Daybeacon
Light
Range
Shoalest Sounding
Navigaton Channel

NOTES:

Horizontal Datum: WGS84. Projected coordinate system: Transverse Mercator, State Plane, Georgia East Zone, 1001, Surveyed in North American Datum of 1983/2011

Elevations are referenced to Mean Lower Low Water (MLLW) Datum. MLLW is defined by NOAA vDatum 4.4.2 for all USACE Surveys of Coastal Georgia.

This project was designed by The Savannah District of the U.S. Army Corps of Engineers. The initials and signatures and registration designations of individuals appear on these project documents within the scope of their employment as
Required by ER1110-1-8152.

Notes:

The information depicted on this survey map represents the results of surveys made on the dates indicated and can only be considered as indicating the general conditions existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here.
Required by 33 CFR 209.325

For the most up to date information please check our website at:
WWW.SAS.USACE.ARMY.MIL

Notes:

The following equipment was used for this survey:
Knudsen dual-frequency Singlebeam Echosounder 28khz / 200khz
Trimble MPS-865 GPS Receiver
RTK radio tide correction for MLLW

1:2,000
SCALE IN FEET
0 100 200 400 600 800 1,000

US Army Corps of Engineers®
Savannah District





Survey Date: 8/26/2022	AuthorizedDepth:12ft. RequiredDepth:12ft.
Sheet 125 of 153 Map Number: 214	Overdepth:14ft.
Scale: 1:2,000	Side Slope Ratio: 3:1 (Rise : Run)
Processed by: Miles G. Saunders - Geographer / Hydrographer	
NAIP Imagery is provided by USDA-FPAC	
Imagery Date: December 2019	

HYDROGRAPHIC SURVEY

U.S. ARMY ENGINEER DISTRICT
CORPS OF ENGINEERS
SAVANNAH, GEORGIA

Atlantic Intercoastal Waterway
St Simons Sound

Station: Mile 679.25 to Mile 680.5

AIWW

81°26'0"W 31°6'0"N | 31°5'55"N | 31°5'50"N | 31°5'45"N | 31°5'40"N | 31°5'35"N | 31°5'30"N | 31°5'25"N | 31°5'20"N | 81°26'5"W

Brunswick Point
Cut Range
Rear Light

Brunswick Point
Cut Range
Front Light 2

680.5

Jekyll Creek
Daybeacon 3

680.75

Jekyll Creek
Daybeacon 5

681

Jekyll
Creek
Light 9

681.25

Jekyll Creek
Daybeacon 10

Jekyll Creek
Jetty Range
Front Light

Jekyll Creek
Jetty Warning
Daybeacon 8

Jekyll
Creek Jetty
Daybeacon 6

Jekyll Creek
Jetty Warning
Light 4

Jekyll
Island Range
Rear Light

81°26'40"W | 31°6'0"N | 31°5'55"N | 31°5'50"N | 31°5'45"N | 31°5'40"N | 31°5'35"N | 31°5'30"N | 31°5'25"N | 31°5'20"N | 81°26'45"W | 31°5'15"N

Elevation
- 15 and Deeper
- 14 - 15
- 12 - 14
- 10 - 12
- 8 - 10
- 7 - 8
- 6 - 7
- 4 - 6
- 4 and Shallower

- Buoy
- Daybeacon
- Light
- Range
- Shoalest Sounding
- Navigaton Channel

NOTES:

Horizontal Datum: WGS84. Projected coordinate system: Transverse Mercator, State Plane, Georgia East Zone, 1001, Surveyed in North American Datum of 1983/2011

Elevations are referenced to Mean Lower Low Water (MLLW) Datum. MLLW is defined by NOAA vDatum 4.4.2 for all USACE Surveys of Coastal Georgia.

This project was designed by The Savannah District of the U.S. Army Corps of Engineers. The initials and signatures and registration designations of individuals appear on these project documents within the scope of their employment as Required by ER1110-1-8152.

Notes:

The information depicted on this survey map represents the results of surveys made on the dates indicated and can only be considered as indicating the general conditions existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here. Required by 33 CFR 209.325

For the most up to date information please check our website at: WWW.SAS.USACE.ARMY.MIL

Notes:

The following equipment was used for this survey:
Knudsen dual-frequency Singlebeam Echosounder 28khz / 200khz
Trimble MPS-865 GPS Receiver
RTK radio tide correction for MLLW

1:2,000
SCALE IN FEET
0 100 200 400 600 800 1,000

US Army Corps of Engineers®
Savannah District





AuthorizedDepth:12ft.	RequiredDepth:12ft.
	Overdepth:14ft.
	Side Slope Ratio: 3:1 (Rise : Run)
Survey Date: 8/26/2022	
Sheet 126 of 153	Map Number: 215
Scale: 1:2,000	
Processed by: Miles G. Saunders - Geographer / Hydrographer	
NAIP Imagery is provided by USDA-FPAC	
Imagery Date: December 2019	


HYDROGRAPHIC SURVEY

U.S. ARMY ENGINEER DISTRICT
CORPS OF ENGINEERS
SAVANNAH, GEORGIA

Atlantic Intercoastal Waterway
St Simons Sound

Station: Mile 680.5 to Mile 681.25

AIWW

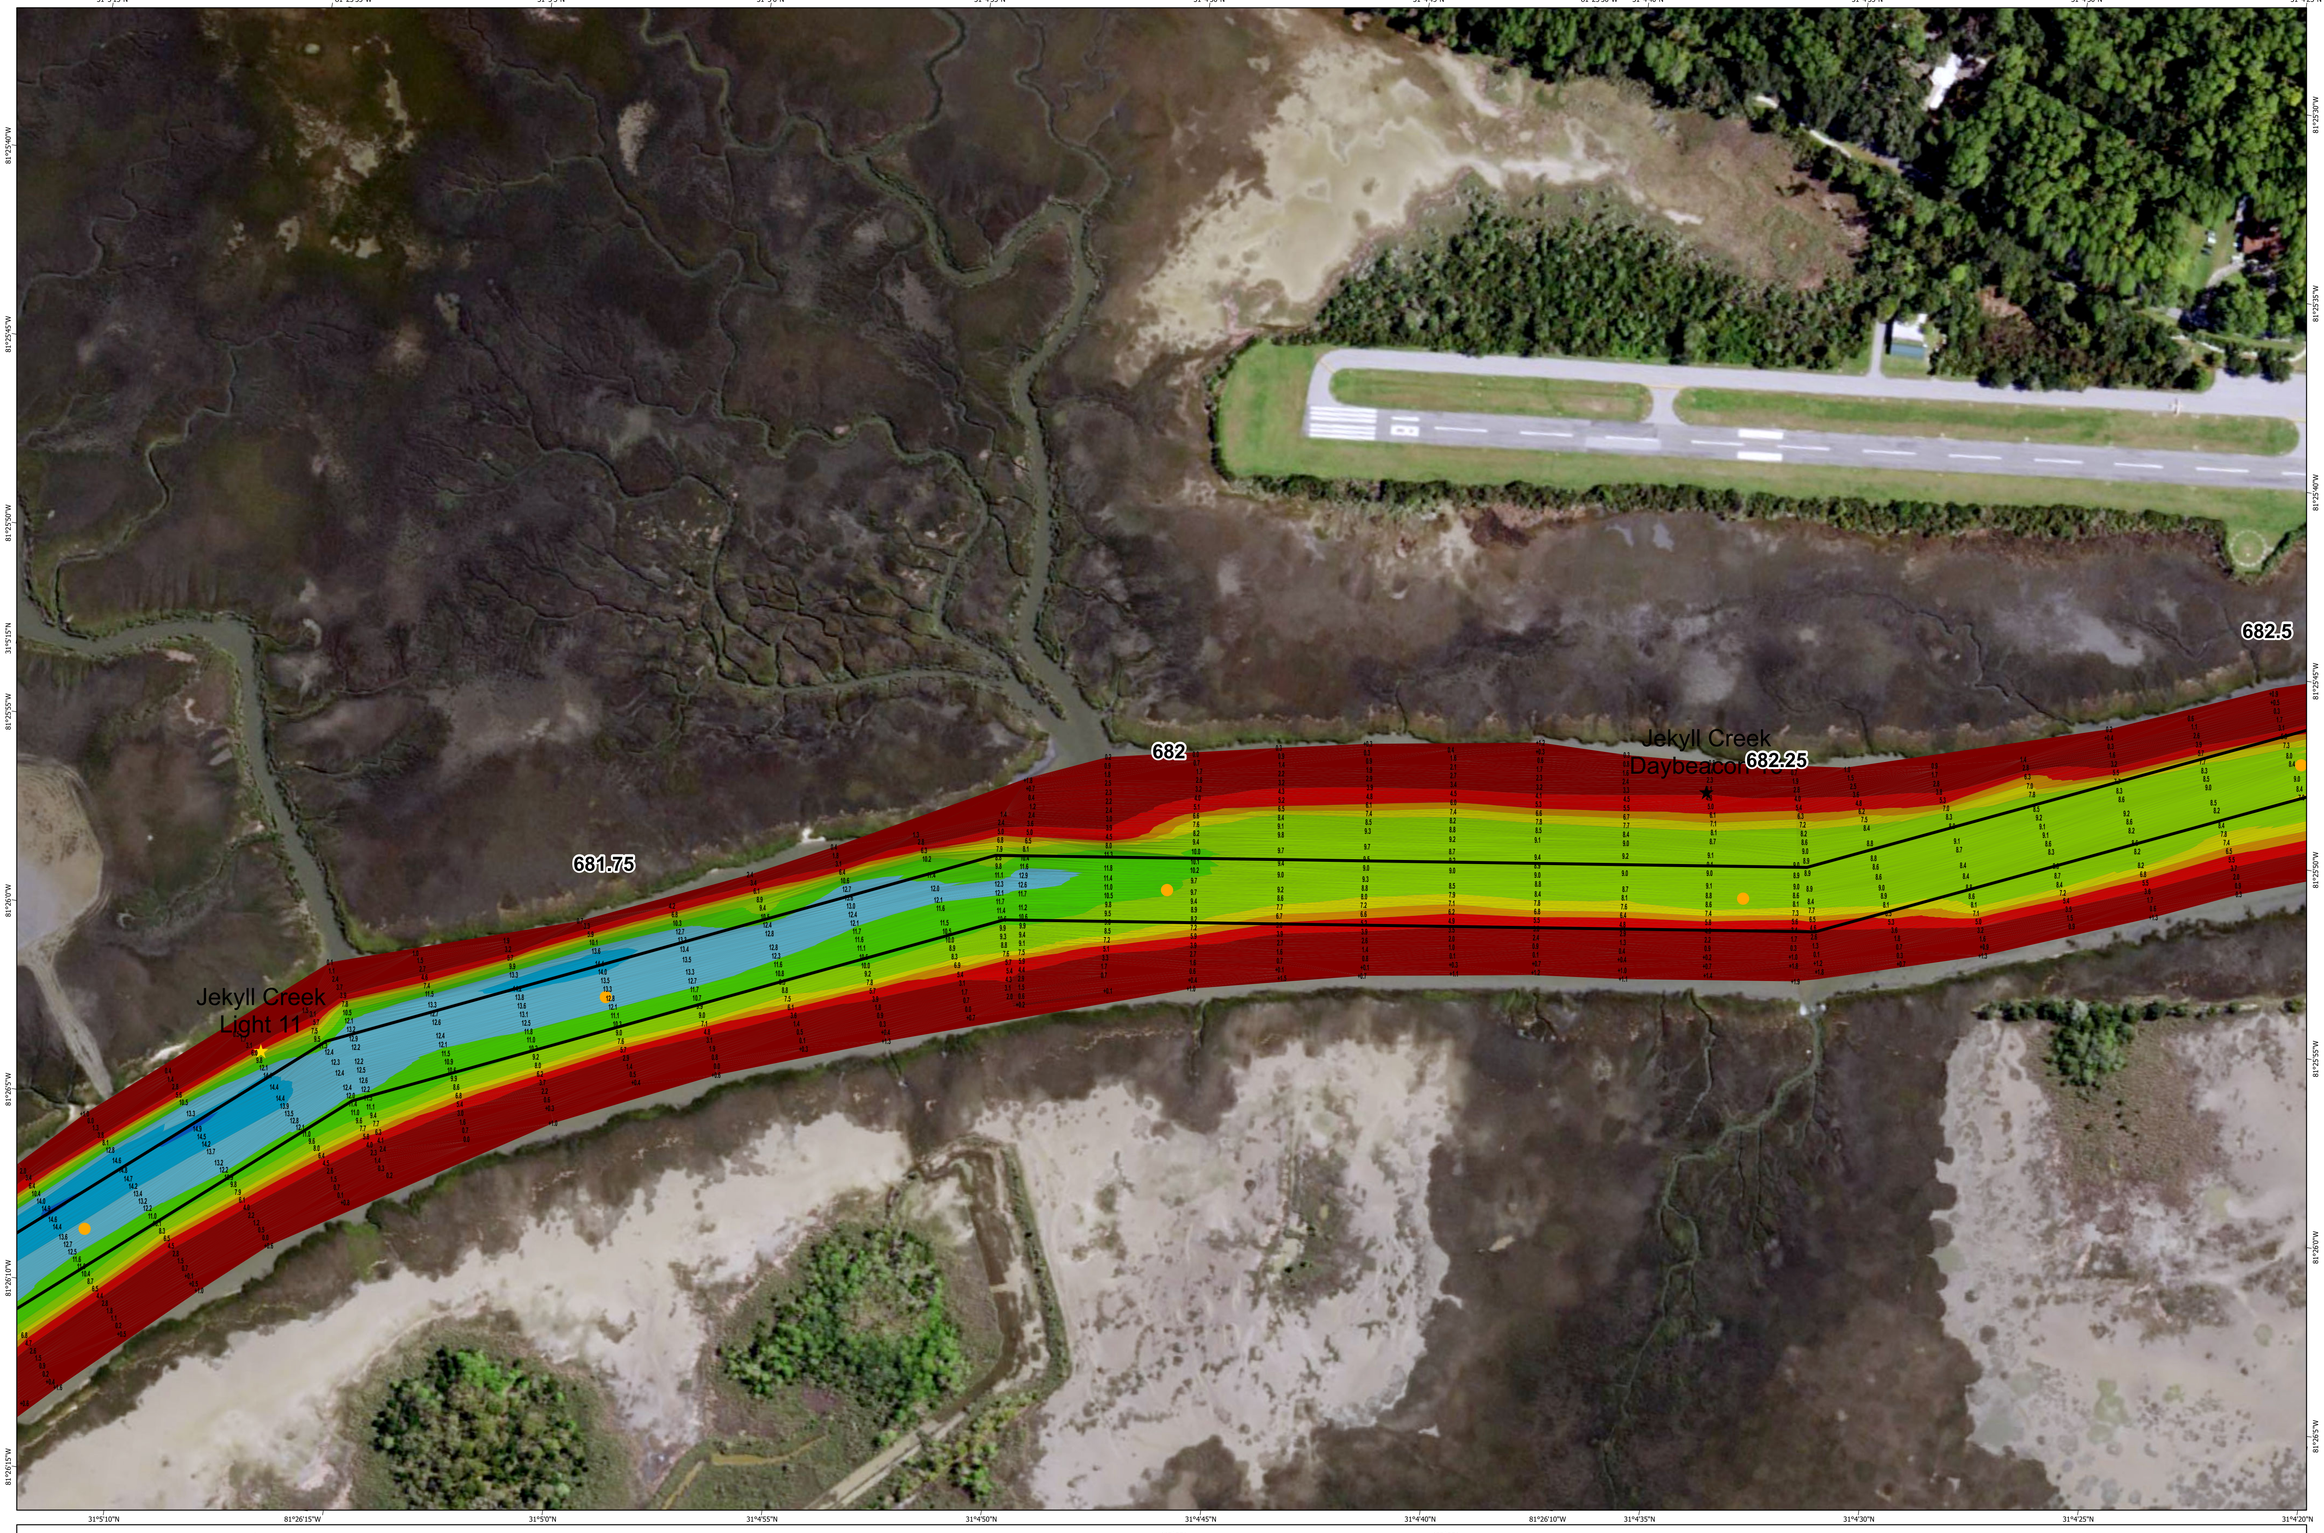

31°5'15"N 81°25'35"W 31°5'5"N 31°5'0"N 31°4'55"N 31°4'50"N 31°4'45"N 81°25'30"W 31°4'40"N 31°4'35"N 31°4'30"N 31°4'25"N

31°5'10"N 81°26'15"W 31°5'0"N 31°4'55"N 31°4'50"N 31°4'45"N 31°4'40"N 81°26'10"W 31°4'35"N 31°4'30"N 31°4'25"N 31°4'20"N

81°25'40"W 81°25'35"W 81°25'30"W 81°25'25"W 81°25'20"W 81°25'15"W

Elevation
- 15 and Deeper
- 14 - 15
- 12 - 14
- 10 - 12
- 8 - 10
- 7 - 8
- 6 - 7
- 4 - 6
- 4 and Shallower

- Buoy
- Daybeacon
- Light
- Range
- Shoalest Sounding
- Navigaton Channel

N E S W

NOTES:

Horizontal Datum: WGS84. Projected coordinate system: Transverse Mercator, State Plane, Georgia East Zone, 1001, Surveyed in North American Datum of 1983/2011

Elevations are referenced to Mean Lower Low Water (MLLW) Datum. MLLW is defined by NOAA vDatum 4.4.2 for all USACE Surveys of Coastal Georgia.

This project was designed by The Savannah District of the U.S. Army Corps of Engineers. The initials and signatures and registration designations of individuals appear on these project documents within the scope of their employment as Required by ER1110-1-8152.

Notes:

The information depicted on this survey map represents the results of surveys made on the dates indicated and can only be considered as indicating the general conditions existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here. Required by 33 CFR 209.325

For the most up to date information please check our website at: WWW.SAS.USACE.ARMY.MIL

Notes:

The following equipment was used for this survey:
Knudsen dual-frequency Singlebeam Echosounder 28khz / 200khz
Trimble MPS-865 GPS Receiver
RTK radio tide correction for MLLW

1:2,000
SCALE IN FEET
0 100 200 400 600 800 1,000

US Army Corps of Engineers®
Savannah District






AuthorizedDepth:12ft.	RequiredDepth:12ft.
	Overdepth:14ft.
Side Slope Ratio: 3:1 (Rise : Run)	
Processed by: Miles G. Saunders - Geographer / Hydrographer	
NAIP Imagery is provided by USDA-FPAC	
Imagery Date: December 2019	
Survey Date: 8/26/2022	
Sheet 127 of 153	Map Number: 216
Scale: 1:2,000	

HYDROGRAPHIC SURVEY

U.S. ARMY ENGINEER DISTRICT
CORPS OF ENGINEERS
SAVANNAH, GEORGIA

Atlantic Intercoastal Waterway
Jekyll Creek
Station: Mile 681.75 to Mile 682.5
AIWW

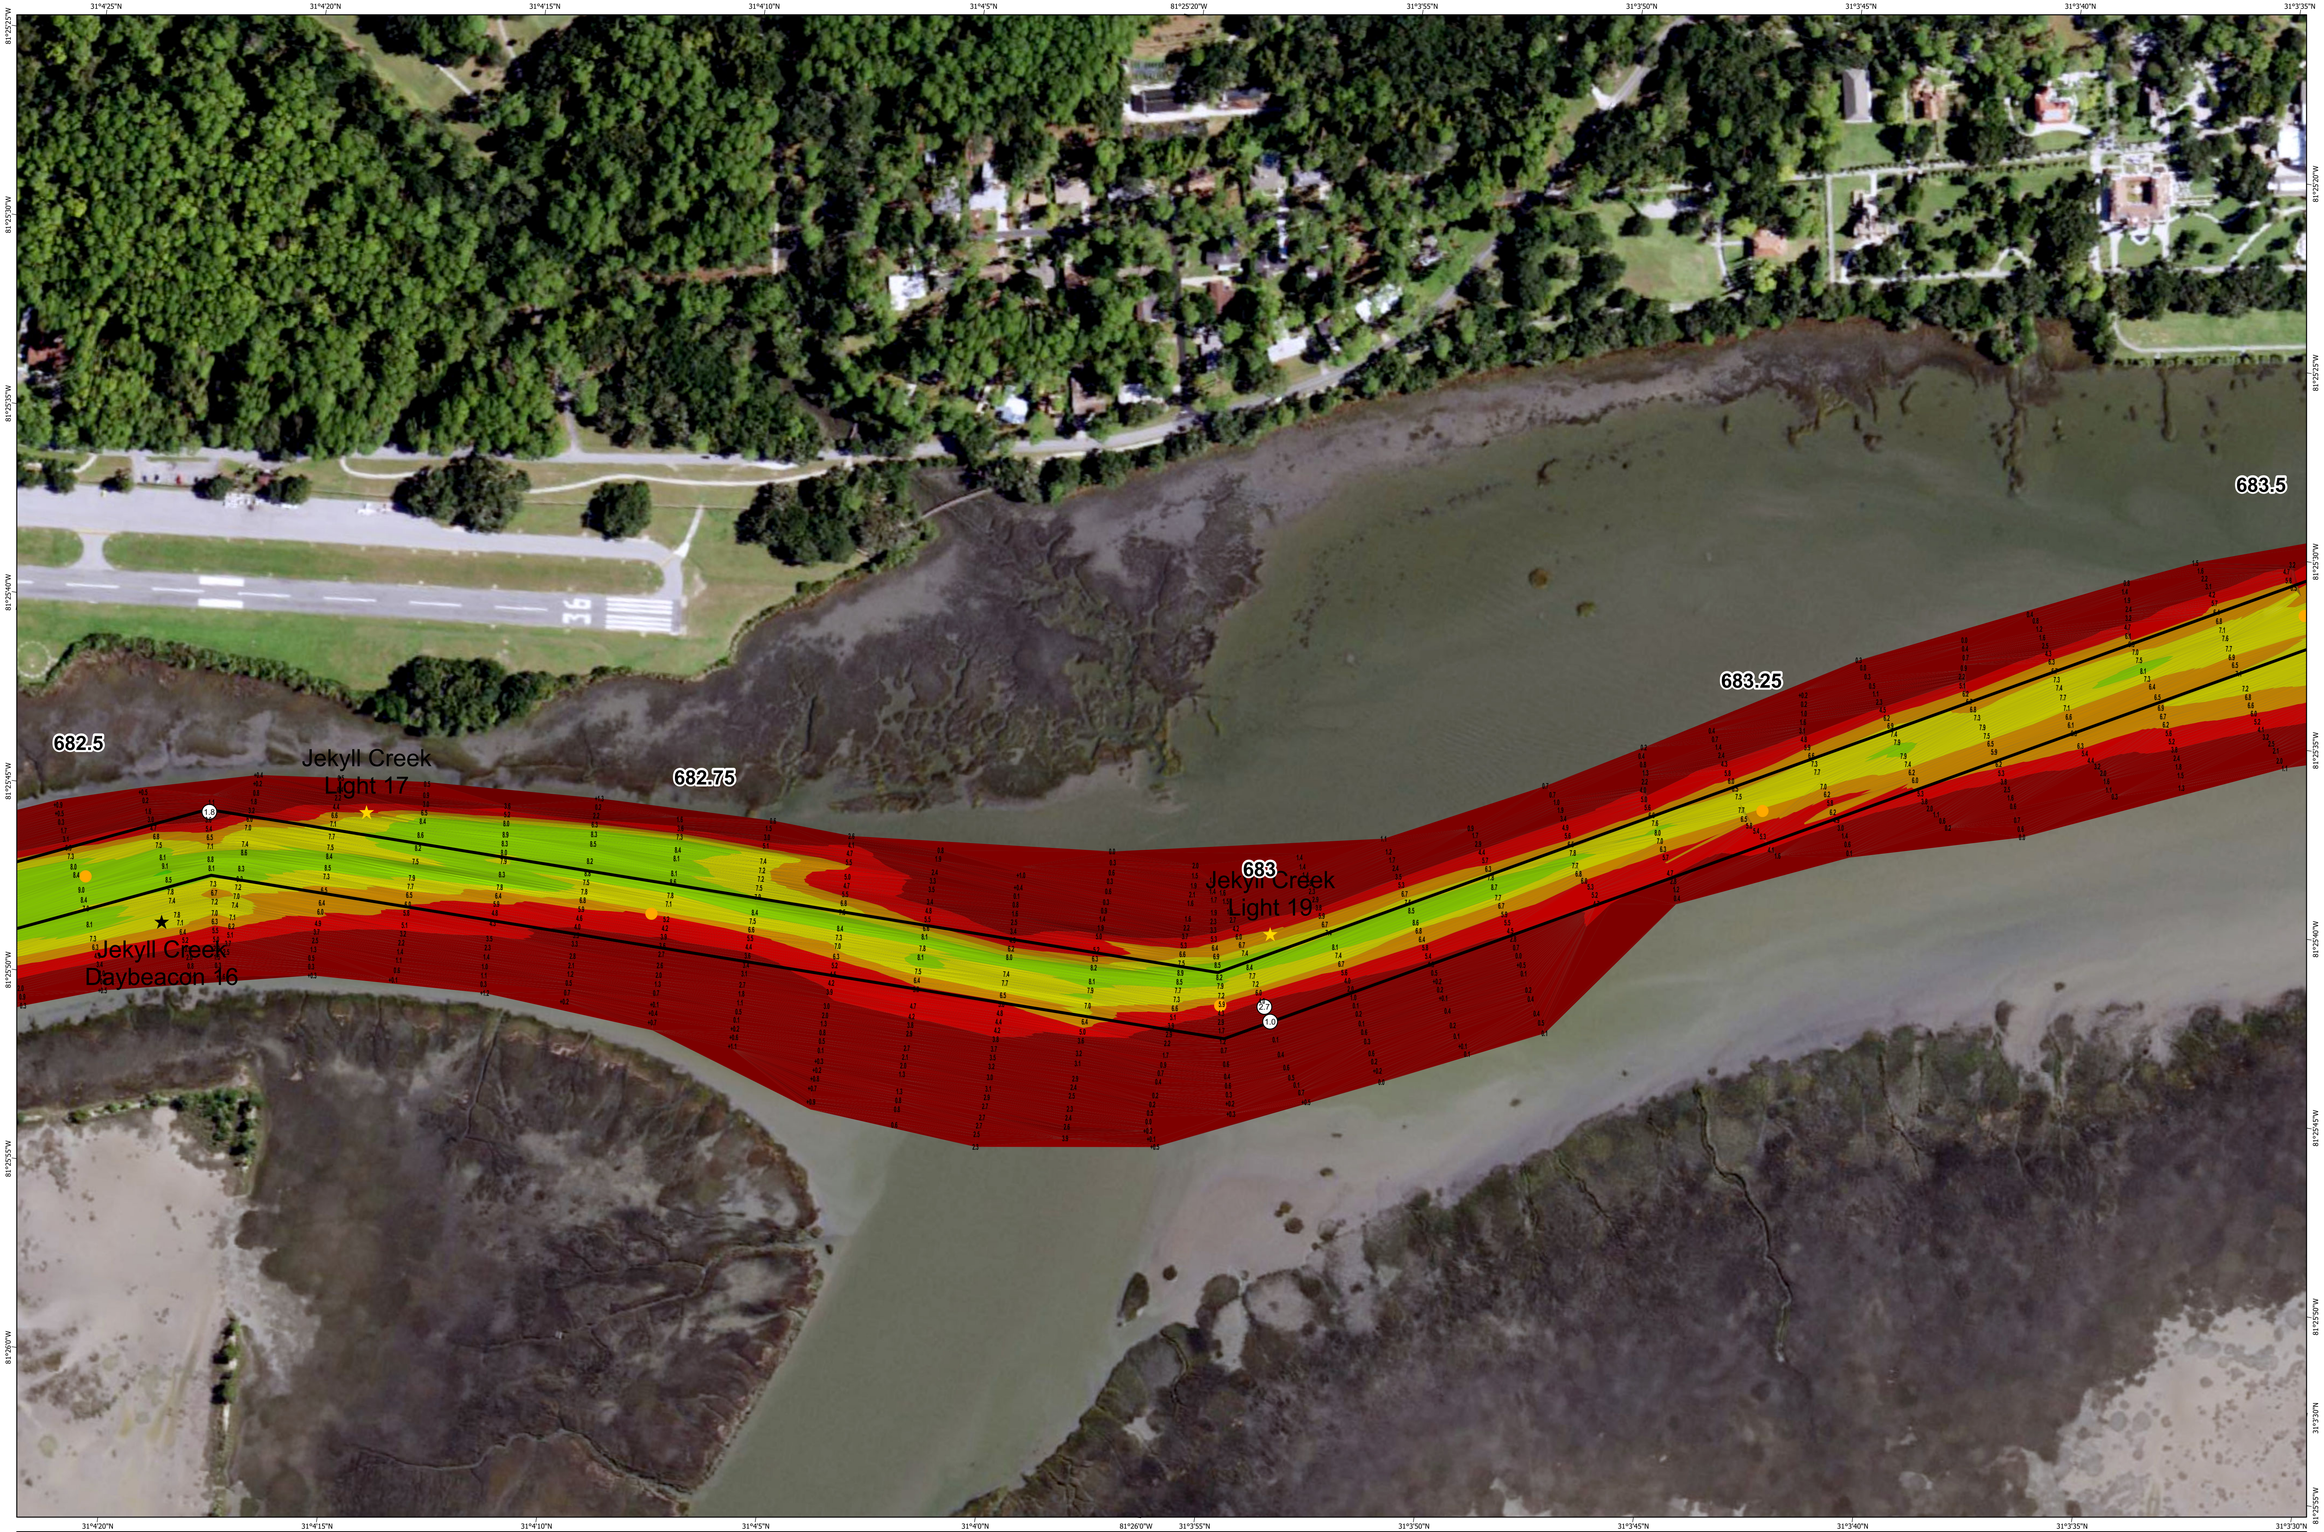

Elevation

15 and Deeper	8 - 10
14 - 15	7 - 8
12 - 14	6 - 7
10 - 12	4 - 6
	4 and Shallower

- Buoy
- Daybeacon
- Light
- Range
- Shoalest Sounding
- Navigaton Channel

NOTES:

Horizontal Datum: WGS84. Projected coordinate system: Transverse Mercator, State Plane, Georgia East Zone, 1001, Surveyed in North American Datum of 1983/2011

Elevations are referenced to Mean Lower Low Water (MLLW) Datum. MLLW is defined by NOAA vDatum 4.4.2 for all USACE Surveys of Coastal Georgia.

This project was designed by The Savannah District of the U.S. Army Corps of Engineers. The initials and signatures and registration designations of individuals appear on these project documents within the scope of their employment as Required by ER1110-1-8152.

Notes:

The information depicted on this survey map represents the results of surveys made on the dates indicated and can only be considered as indicating the general conditions existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here. Required by 33 CFR 209.325

For the most up to date information please check our website at: WWW.SAS.USACE.ARMY.MIL

Notes:

The following equipment was used for this survey:
Knudsen dual-frequency Singlebeam Echosounder 28khz / 200khz
Trimble MPS-865 GPS Receiver
RTK radio tide correction for MLLW

1:2,000
SCALE IN FEET
0 100 200 400 600 800 1,000

US Army Corps of Engineers®
Savannah District






Survey Date: 8/26/2022	Authorized Depth: 12ft. Required Depth: 12ft.
Sheet 128 of 153 Map Number: 217	Overdepth: 14ft.
Scale: 1:2,000	Side Slope Ratio: 3:1 (Rise : Run)
Processed by: Miles G. Saunders - Geographer / Hydrographer	
NAIP Imagery is provided by USDA-FPAC	
Imagery Date: December 2019	

HYDROGRAPHIC SURVEY


U.S. ARMY ENGINEER DISTRICT
CORPS OF ENGINEERS
SAVANNAH, GEORGIA

Atlantic Intercoastal Waterway
Jekyll Creek
Station: Mile 682.5 to Mile 683.5
AIWW

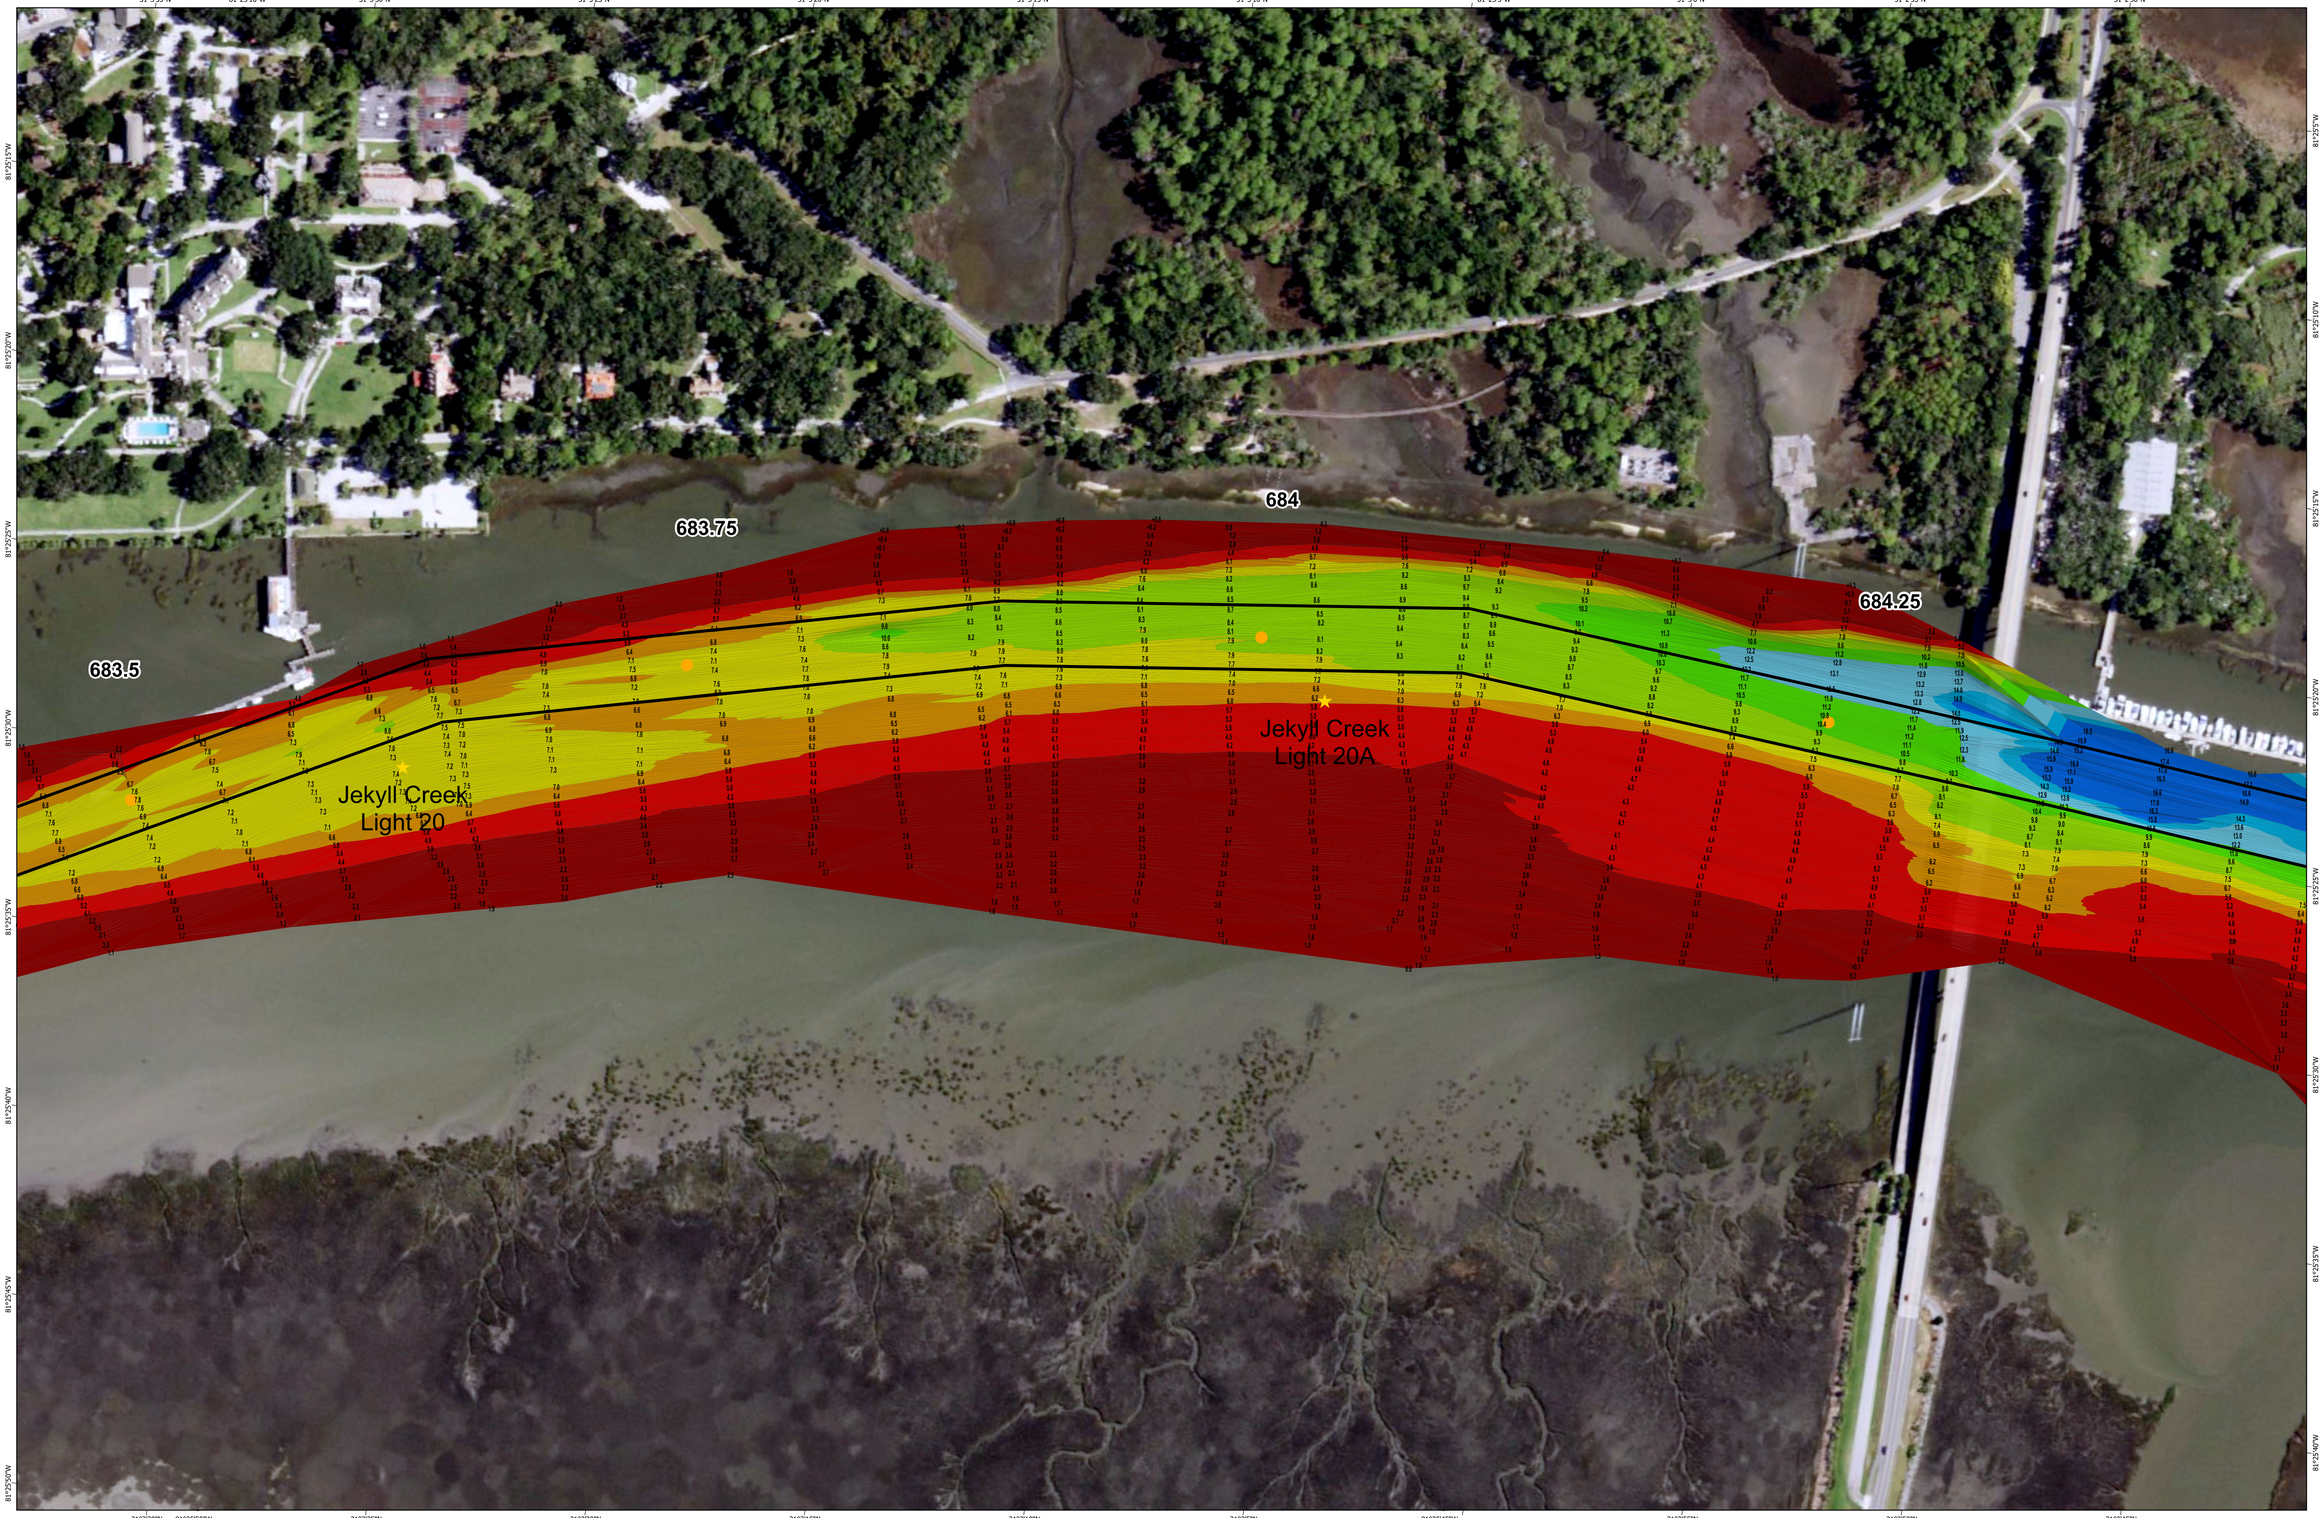

US Army Corps of Engineers®
Savannah District





AuthorizedDepth:12ft.	RequiredDepth:12ft.
	Overdepth:14ft.
Side Slope Ratio: 3:1 (Rise : Run)	
/ Hydrographer	
Survey Date: 8/26/2022	
Sheet 129 of 153	Map Number: 218
Scale: 1:2,000	
Processed by: Miles G. Saunders - Geographer / Hydrogra	
NAIP Imagery is provided by USDA-FPAC	
Imagery Date: December 2019	

HYDROGRAPHIC SURVEY

U.S. ARMY ENGINEER DISTRICT
CORPS OF ENGINEERS
SAVANNAH, GEORGIA

Atlantic Intercoastal Waterway
Jekyll Creek

Station: Mile 683.5 to Mile 684.25

AIWW

Elevation

15 and Deeper	8 - 10
14 - 15	7 - 8
12 - 14	6 - 7
10 - 12	4 - 6
	4 and Shallower

- Buoy
- Daybeacon
- Light
- Range
- Shoalest Sounding
- Navigaton Channel

NOTES:

Horizontal Datum: WGS84. Projected coordinate system: Transverse Mercator, State Plane, Georgia East Zone, 1001, Surveyed in North American Datum of 1983/2011

Elevations are referenced to Mean Lower Low Water (MLLW) Datum. MLLW is defined by NOAA vDatum 4.4.2 for all USACE Surveys of Coastal Georgia.

This project was designed by The Savannah District of the U.S. Army Corps of Engineers. The initials and signatures and registration designations of individuals appear on these project documents within the scope of their employment as Required by ER1110-1-8152.

Notes:

The information depicted on this survey map represents the results of surveys made on the dates indicated and can only be considered as indicating the general conditions existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here. Required by 33 CFR 209.325


For the most up to date information please check our website at: WWW.SAS.USACE.ARMY.MIL

Notes:

The following equipment was used for this survey:
Knudsen dual-frequency Singlebeam Echosounder 28khz / 200khz
Trimble MPS-865 GPS Receiver
RTK radio tide correction for MLLW

1:2,000
SCALE IN FEET

0 100 200 400 600 800 1,000

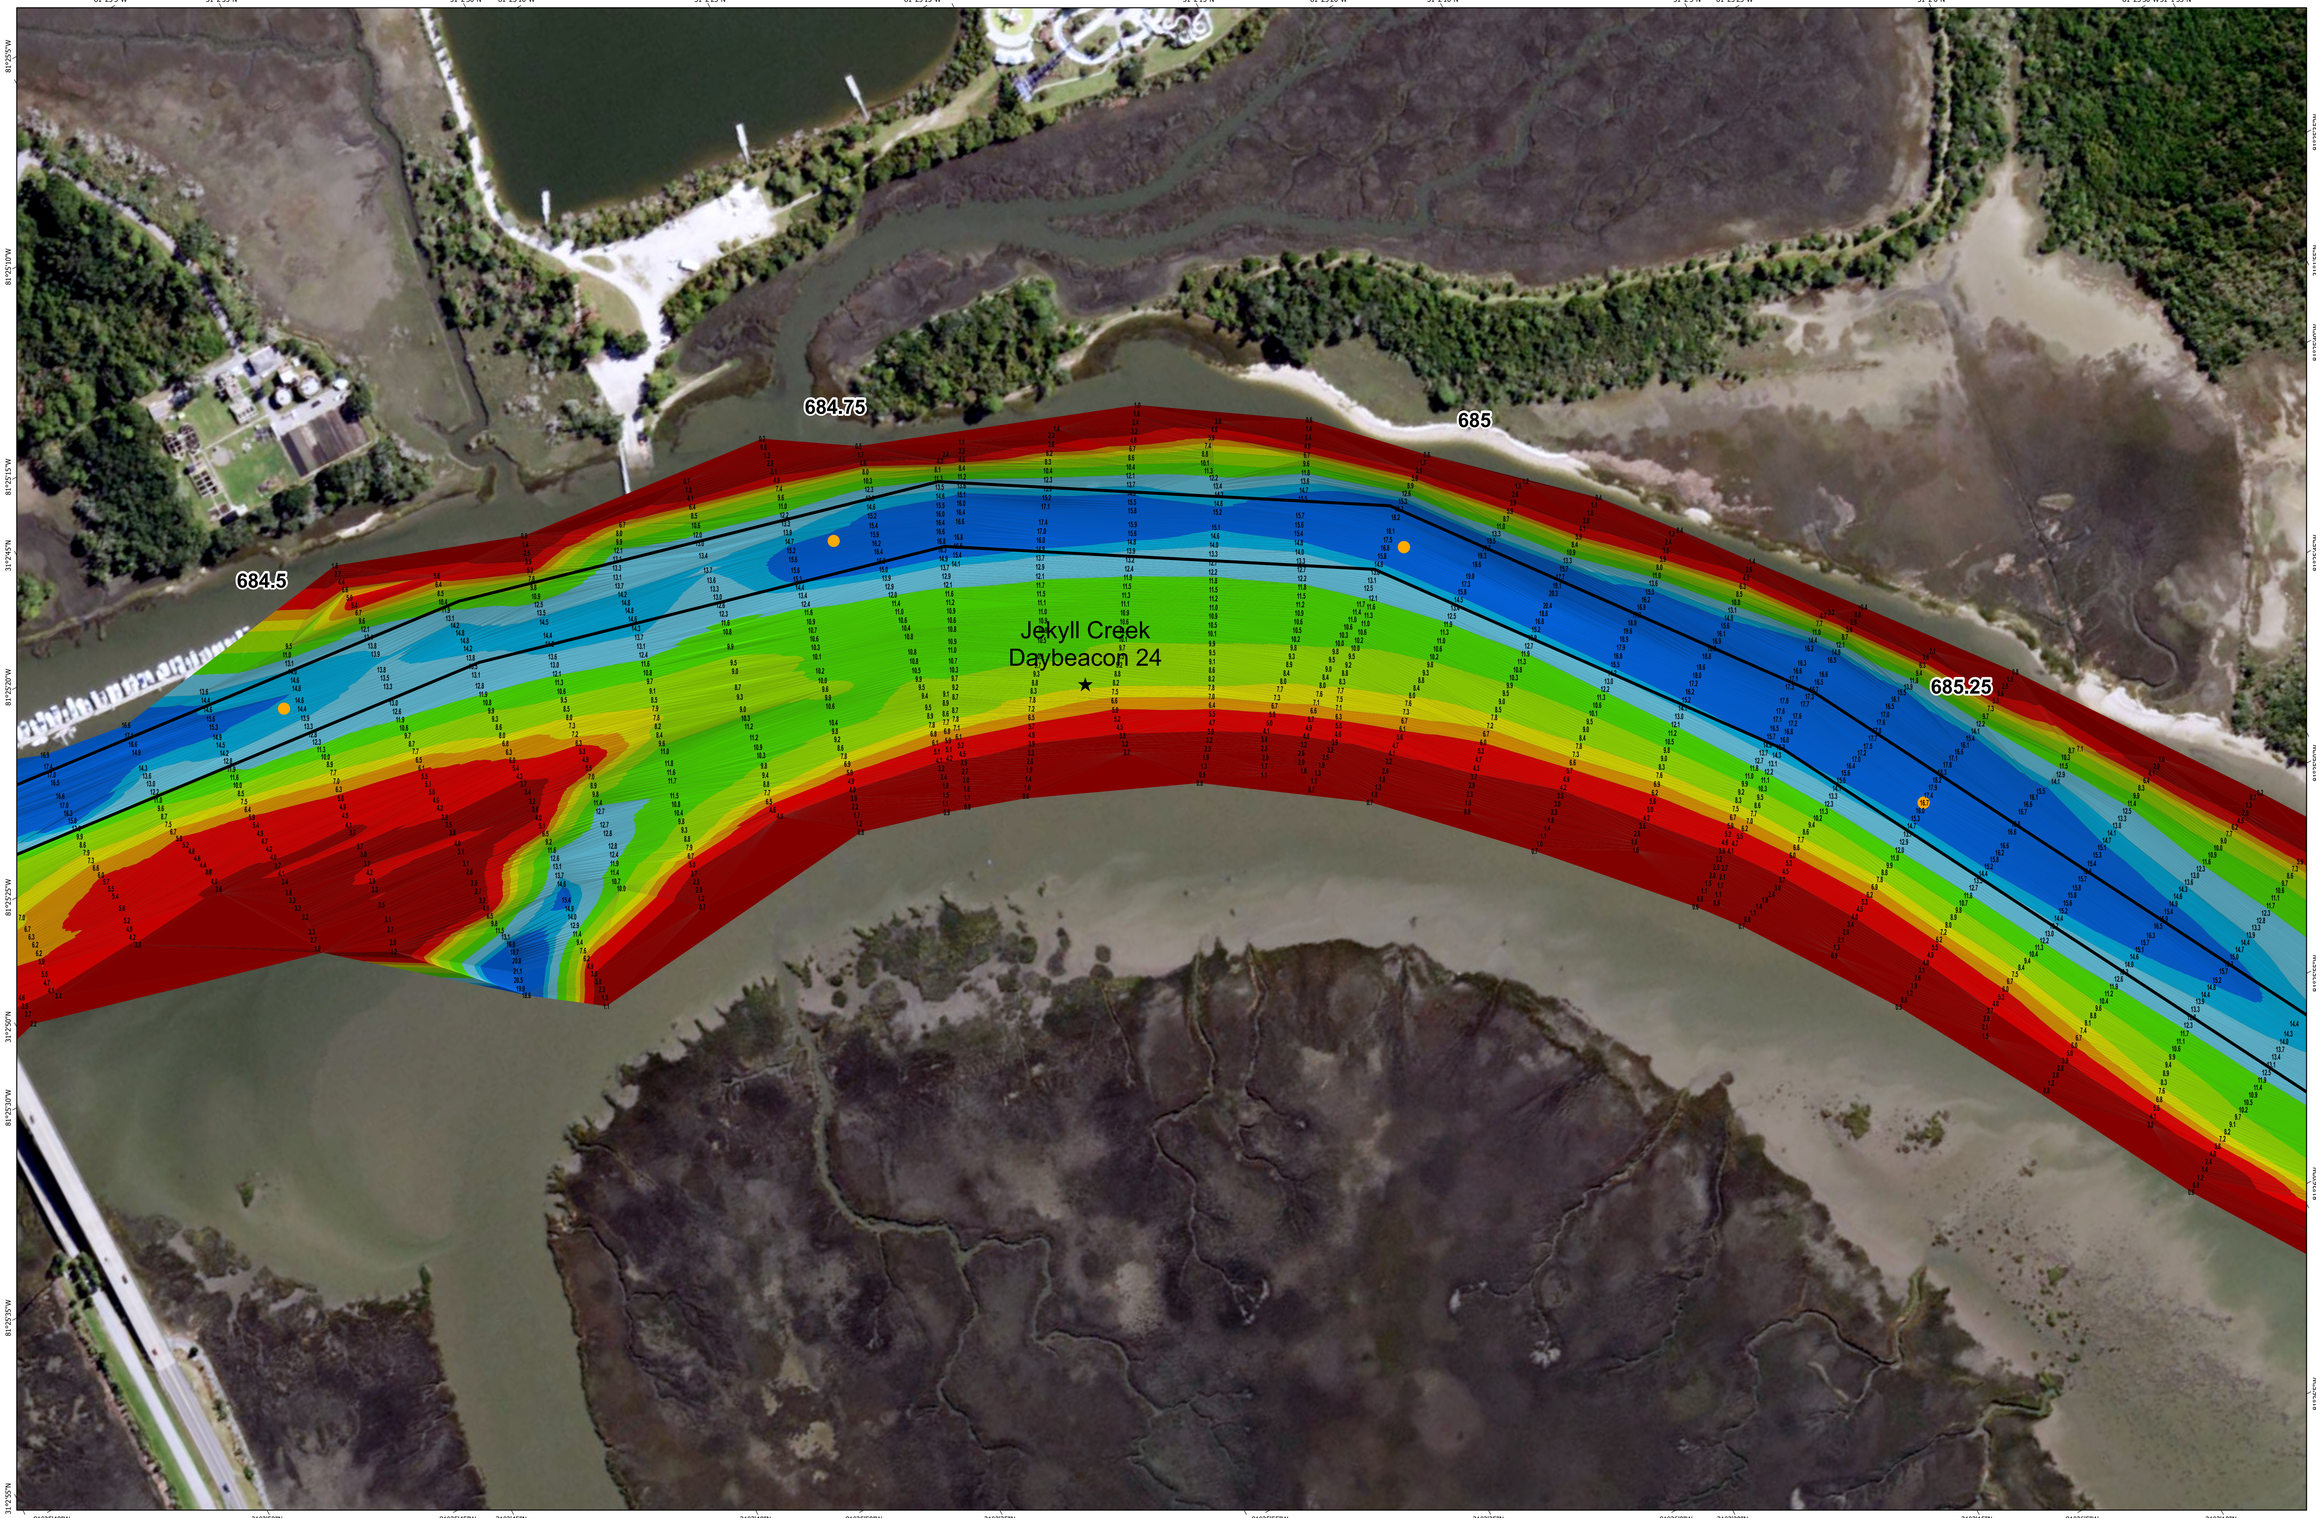

Elevation
- 15 and Deeper
- 14 - 15
- 12 - 14
- 10 - 12
- 8 - 10
- 7 - 8
- 6 - 7
- 4 - 6
- 4 and Shallower

- Buoy
- Daybeacon
- Light
- Range
- Shoalest Sounding
- Navigaton Channel

NOTES:

Horizontal Datum: WGS84. Projected coordinate system: Transverse Mercator, State Plane, Georgia East Zone, 1001, Surveyed in North American Datum of 1983/2011

Elevations are referenced to Mean Lower Low Water (MLLW) Datum. MLLW is defined by NOAA vDatum 4.4.2 for all USACE Surveys of Coastal Georgia.

This project was designed by The Savannah District of the U.S. Army Corps of Engineers. The initials and signatures and registration designations of individuals appear on these project documents within the scope of their employment as Required by ER1110-1-8152.

Notes:

The information depicted on this survey map represents the results of surveys made on the dates indicated and can only be considered as indicating the general conditions existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here. Required by 33 CFR 209.325

For the most up to date information please check our website at: WWW.SAS.USACE.ARMY.MIL


Notes:

The following equipment was used for this survey:
Knudsen dual-frequency Singlebeam Echosounder 28khz / 200khz
Trimble MPS-865 GPS Receiver
RTK radio tide correction for MLLW

1:2,000
SCALE IN FEET
0 100 200 400 600 800 1,000

US Army Corps of Engineers®
Savannah District






AuthorizedDepth:12ft.	RequiredDepth:12ft.
	Overdepth:14ft.
Side Slope Ratio: 3:1 (Rise : Run)	
Side	ther
Survey Date: 8/26/2022	
Sheet 130 of 153	Map Number: 219
Scale: 1:2,000	
Processed by: Miles G. Saunders - Geographer / Hydrographer	
NAIP Imagery is provided by USDA-FPAC	
Imagery Date: December 2019	

HYDROGRAPHIC SURVEY

U.S. ARMY ENGINEER DISTRICT
CORPS OF ENGINEERS
SAVANNAH, GEORGIA

Atlantic Intercoastal Waterway
Jekyll Creek
Station: Mile 684.5 to Mile 685.5
AIWW

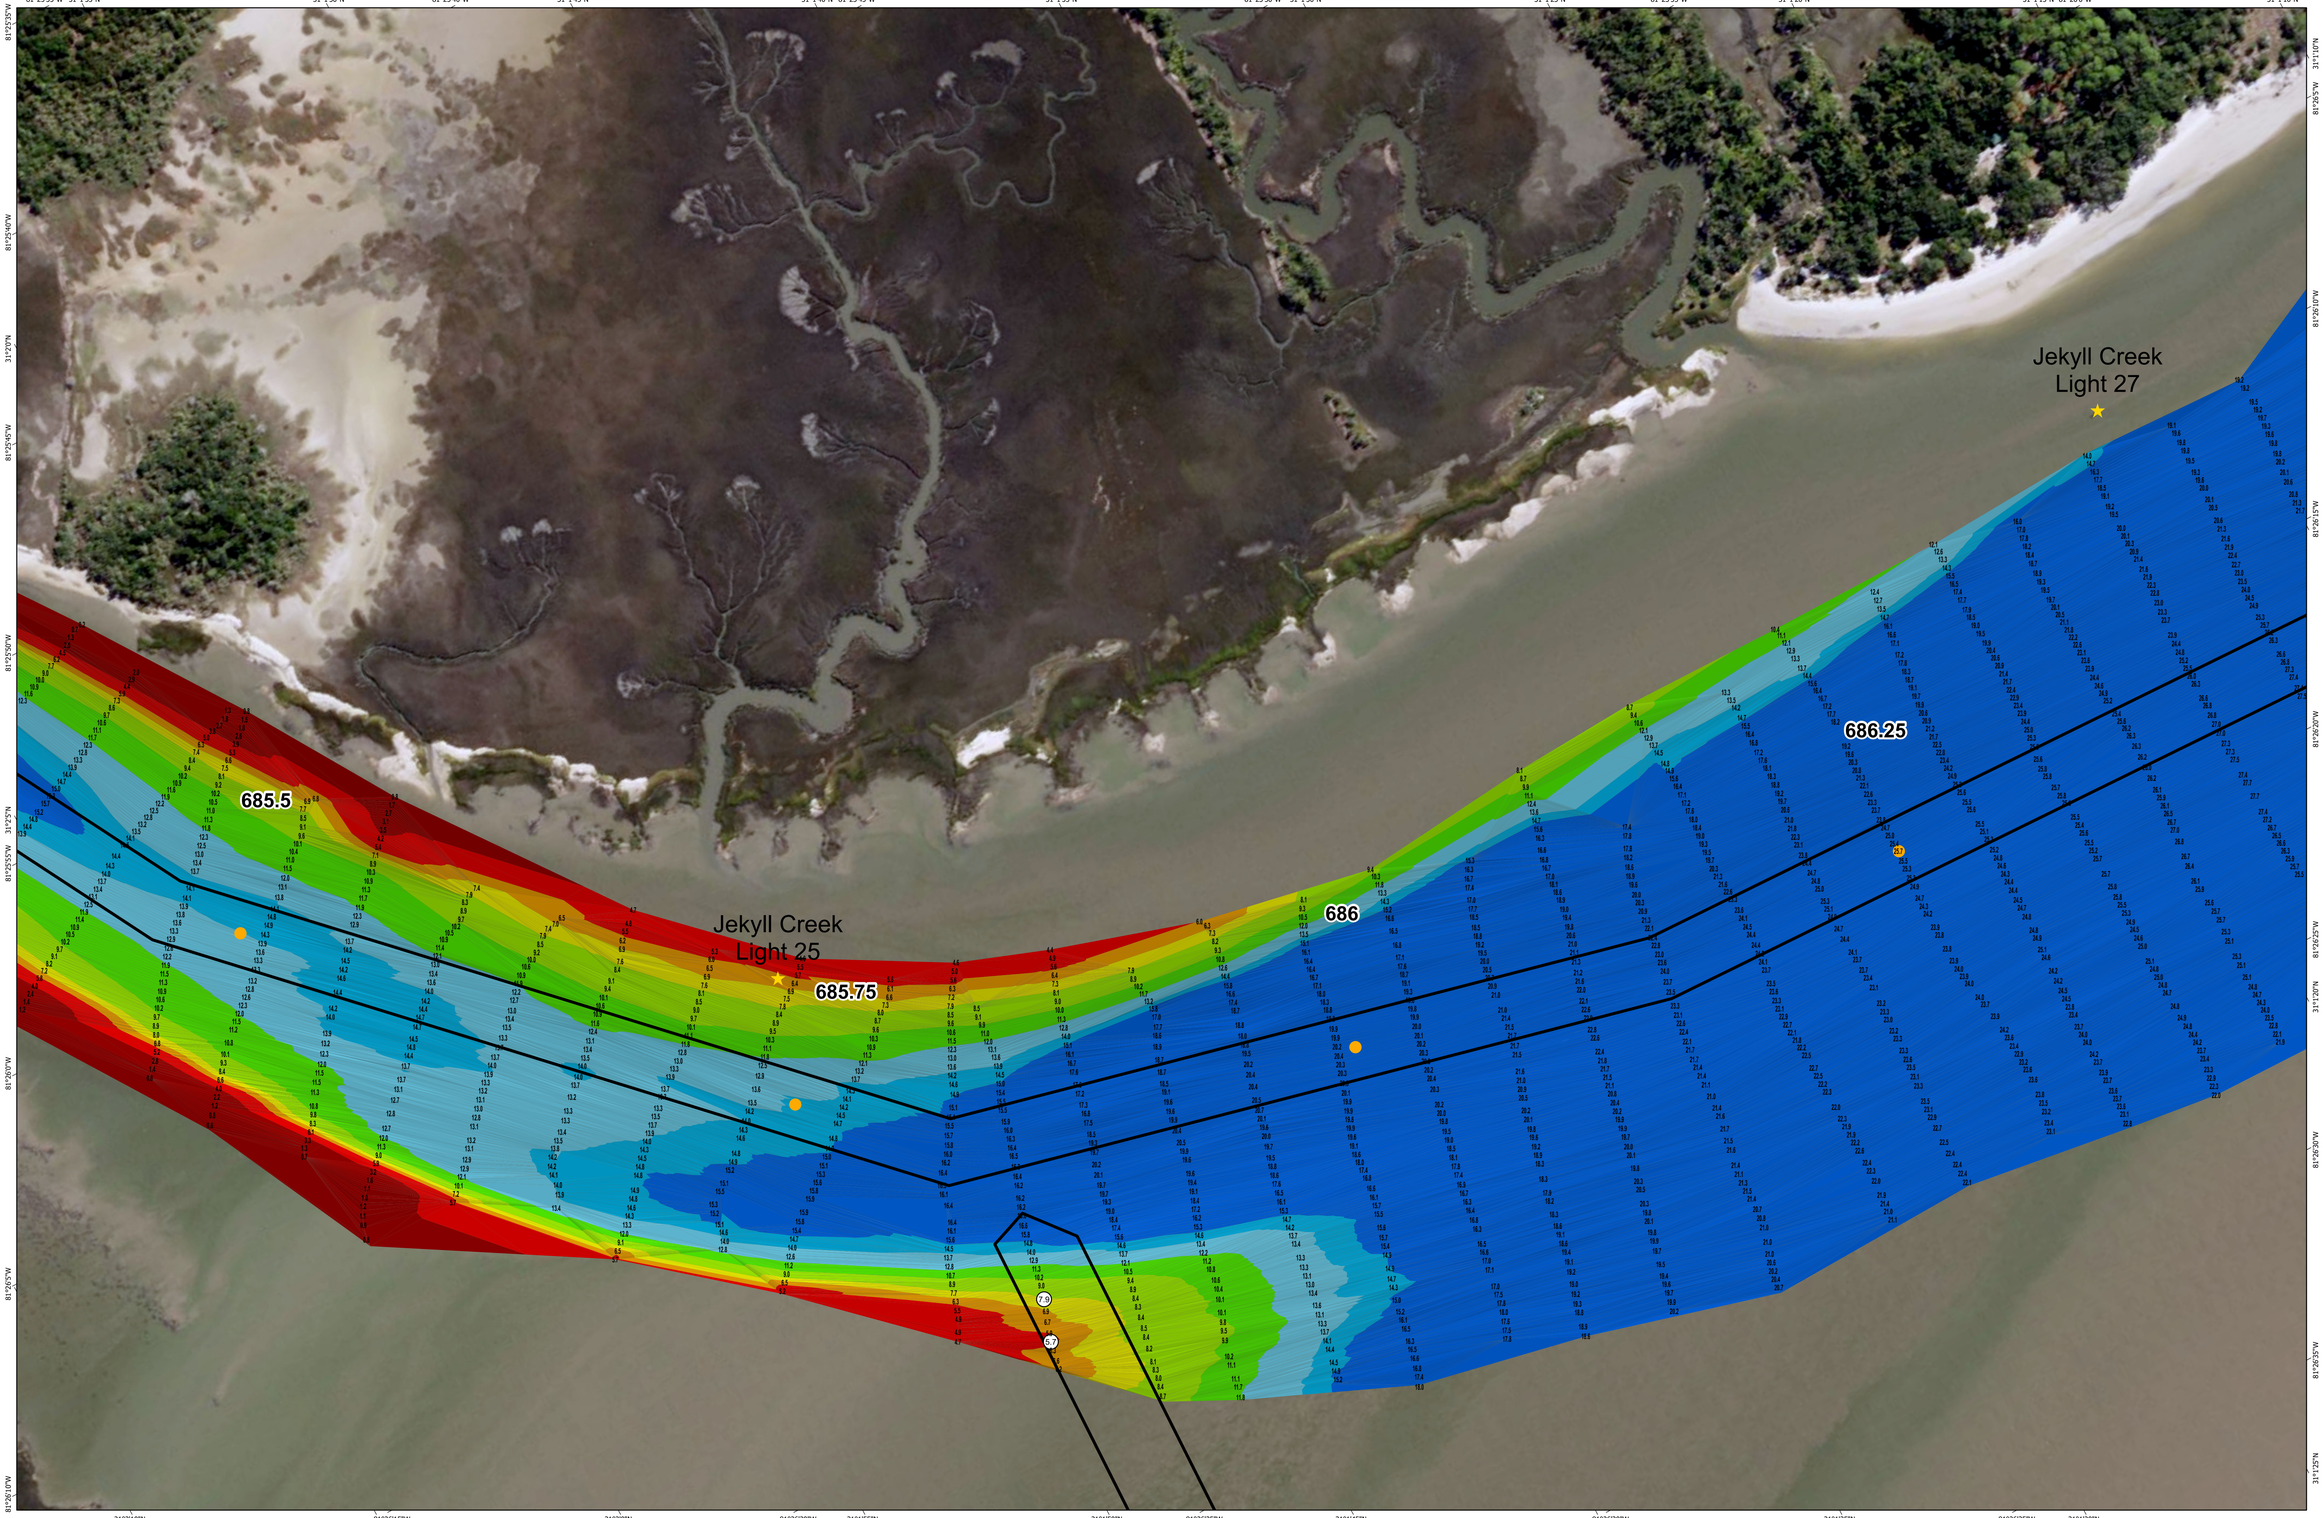

US Army Corps of Engineers®
Savannah District





Survey Date: 8/26/2022	AuthorizedDepth:12ft. RequiredDepth:12ft.
Sheet 131 of 153	Map Number: 220
Scale: 1:2,000	Overdepth:14ft.
Processed by: Miles G. Saunders - Geographer / Hydrographer	Side Slope Ratio: 3:1 (Rise : Run)
NAIP Imagery is provided by USDA-FPAC	
Imagery Date: December 2019	

HYDROGRAPHIC SURVEY

U.S. ARMY ENGINEER DISTRICT
CORPS OF ENGINEERS
SAVANNAH, GEORGIA

Atlantic Intercoastal Waterway
Jekyll Creek
Station: Mile 685.5 to Mile 686.5
AIWW

Elevation
- 15 and Deeper
- 14 - 15
- 12 - 14
- 10 - 12
- 8 - 10
- 7 - 8
- 6 - 7
- 4 - 6
- 4 and Shallower

- Buoy
- Daybeacon
- Light
- Range
- Shoalest Sounding
- Navigaton Channel

NOTES:

Horizontal Datum: WGS84. Projected coordinate system: Transverse Mercator, State Plane, Georgia East Zone, 1001, Surveyed in North American Datum of 1983/2011

Elevations are referenced to Mean Lower Low Water (MLLW) Datum. MLLW is defined by NOAA vDatum 4.4.2 for all USACE Surveys of Coastal Georgia.

This project was designed by The Savannah District of the U.S. Army Corps of Engineers. The initials and signatures and registration designations of individuals appear on these project documents within the scope of their employment as Required by ER1110-1-8152.

Notes:

The information depicted on this survey map represents the results of surveys made on the dates indicated and can only be considered as indicating the general conditions existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here. Required by 33 CFR 209.325

For the most up to date information please check our website at: WWW.SAS.USACE.ARMY.MIL

Notes:

The following equipment was used for this survey:
Knudsen dual-frequency Singlebeam Echosounder 28khz / 200khz
Trimble MPS-985 GPS Receiver
RTK radio tide correction for MLLW

1:2,000
SCALE IN FEET

0 100 200 400 600 800 1,000

81°25'55"W 31°1'15"N 31°1'10"N 31°1'5"N 81°25'50"W 31°1'0"N 31°0'55"N 31°0'50"N 81°25'45"W 31°0'45"N 31°0'40"N 31°0'35"N

Jekyll Creek
Light 27

Jekyll Creek
Light 29

686.5

686.75

687

687.25

81°26'35"W 31°1'10"N 31°1'5"N 81°26'30"W 31°0'55"N 31°0'50"N 81°26'25"W 31°0'40"N 31°0'35"N 31°0'30"N 81°26'20"W

Elevation	
15 and Deeper	8 - 10
14 - 15	7 - 8
12 - 14	6 - 7
10 - 12	4 - 6
	4 and Shallower

- Buoy
- Daybeacon
- Light
- Range
- Shoalest Sounding
- Navigaton Channel

NOTES:

Horizontal Datum: WGS84. Projected coordinate system: Transverse Mercator, State Plane, Georgia East Zone, 1001, Surveyed in North American Datum of 1983/2011

Elevations are referenced to Mean Lower Low Water (MLLW) Datum. MLLW is defined by NOAA vDatum 4.4.2 for all USACE Surveys of Coastal Georgia.

This project was designed by The Savannah District of the U.S. Army Corps of Engineers. The initials and signatures and registration designations of individuals appear on these project documents within the scope of their employment as Required by ER1110-1-8152.

Notes:

The information depicted on this survey map represents the results of surveys made on the dates indicated and can only be considered as indicating the general conditions existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here. Required by 33 CFR 209.325

For the most up to date information please check our website at:
WWW.SAS.USACE.ARMY.MIL

Notes:

The following equipment was used for this survey:
Knudsen dual-frequency Singlebeam Echosounder 28khz / 200khz
Trimble MPS-865 GPS Receiver
RTK radio tide correction for MLLW

1:2,000
SCALE IN FEET
0 100 200 400 600 800 1,000

US Army Corps of Engineers®
Savannah District





Authorized Depth: 12ft.	Required Depth: 12ft.
	Overdepth: 14ft.
	Side Slope Ratio: 3:1 (Rise : Run)
Processed by: Miles G. Saunders - Geographer / Hydrographer	
NAIP Imagery is provided by USDA-FPAC	
Imagery Date: December 2019	
Survey Date: 8/26/2022	
Sheet 132 of 153	Map Number: 221
Scale: 1:2,000	

HYDROGRAPHIC SURVEY

U.S. ARMY ENGINEER DISTRICT
CORPS OF ENGINEERS
SAVANNAH, GEORGIA

Atlantic Intercoastal Waterway
Jekyll Sound

Station: Mile 686.5 to Mile 687.5

AWW

81°25'45"W 31°0'45"N 81°25'40"W 81°25'35"W 31°0'40"N 81°25'30"W 81°25'25"W 31°0'35"N 81°25'20"W 81°25'15"W 31°0'30"N 81°25'10"W 81°25'5"W 31°0'25"N 81°25'0"W

St Andrew Sound Buoy 29A

687.5

687.75

688

688.25

St Andrew Sound Lighted Buoy 30

31°0'47"N 81°25'48"W 31°0'42"N 81°25'38"W 31°0'37"N 81°25'28"W 31°0'32"N 81°25'18"W 31°0'27"N 81°25'8"W

81°26'5"W 31°0'15"N 81°26'0"W 81°25'55"W 31°0'10"N 81°25'50"W 81°25'45"W 31°0'5"N 81°25'40"W 81°25'35"W 31°0'0"N 81°25'30"W 81°25'25"W 30°59'55"N 81°25'20"W

Elevation
- 15 and Deeper
- 14 - 15
- 12 - 14
- 10 - 12
- 8 - 10
- 7 - 8
- 6 - 7
- 4 - 6
- 4 and Shallower

- Buoy
- Daybeacon
- Light
- Range
- Shoalest Sounding
- Navigaton Channel

N W E S

NOTES:

Horizontal Datum: WGS84. Projected coordinate system: Transverse Mercator, State Plane, Georgia East Zone, 1001, Surveyed in North American Datum of 1983/2011

Elevations are referenced to Mean Lower Low Water (MLLW) Datum. MLLW is defined by NOAA vDatum 4.4.2 for all USACE Surveys of Coastal Georgia.

This project was designed by The Savannah District of the U.S. Army Corps of Engineers. The initials and signatures and registration designations of individuals appear on these project documents within the scope of their employment as Required by ER1110-1-8152.

Notes:

The information depicted on this survey map represents the results of surveys made on the dates indicated and can only be considered as indicating the general conditions existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here. Required by 33 CFR 209.325

For the most up to date information please check our website at: WWW.SAS.USACE.ARMY.MIL


Notes:

The following equipment was used for this survey:
Knudsen dual-frequency Singlebeam Echosounder 28khz / 200khz
Trimble MPS-865 GPS Receiver
RTK radio tide correction for MLLW

1:2,000
SCALE IN FEET
0 100 200 400 600 800 1,000

US Army Corps of Engineers®
Savannah District





AuthorizedDepth:12ft. RequiredDepth:12ft.
Overdepth:14ft.
Side Slope Ratio: 3:1 (Rise : Run)

Survey Date: 8/26/2022
Sheet 133 of 153 Map Number: 222
Scale: 1:2,000
Processed by: Miles G. Saunders - Geographer / Hydrographer
NAIP Imagery is provided by USDA-FPAC
Imagery Date: December 2019


HYDROGRAPHIC SURVEY

U.S. ARMY ENGINEER DISTRICT
CORPS OF ENGINEERS
SAVANNAH, GEORGIA

Atlantic Intercoastal Waterway
St Andrews Sound

Station: Mile 687.25 to Mile 688.25

AIWW

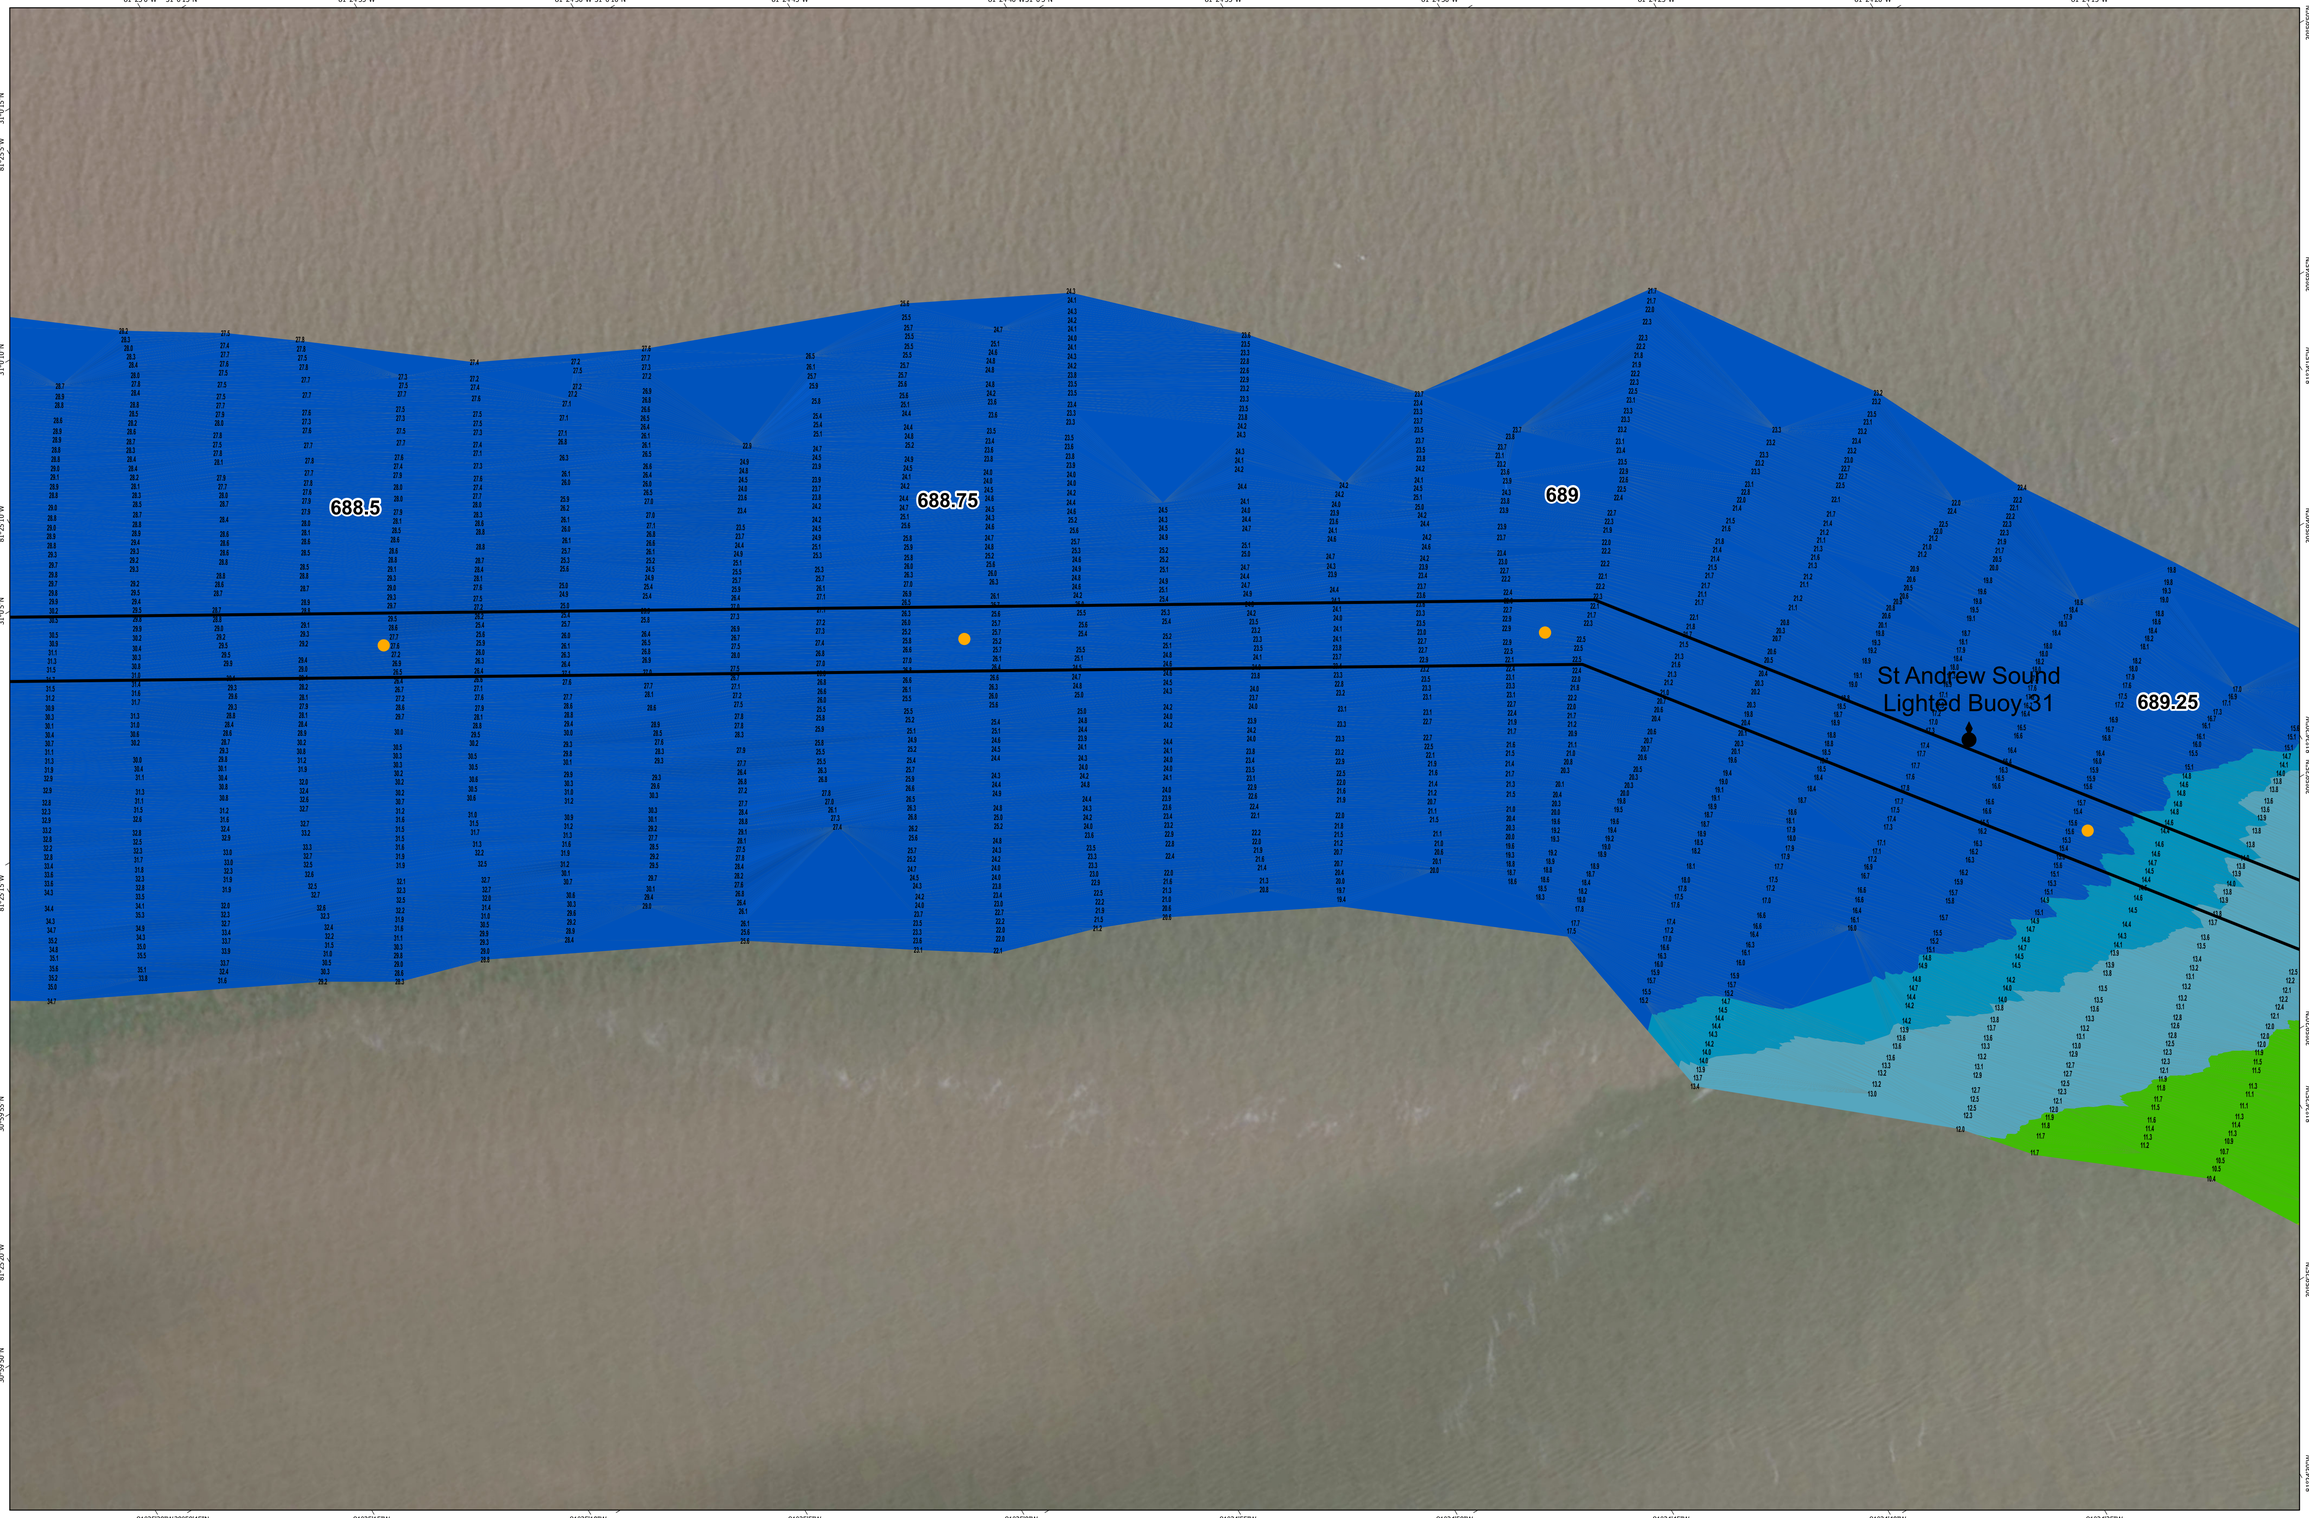

Elevation
- 15 and Deeper
- 14 - 15
- 12 - 14
- 10 - 12
- 8 - 10
- 7 - 8
- 6 - 7
- 4 - 6
- 4 and Shallower

- Buoy
- Daybeacon
- Light
- Range
- Shoalest Sounding
- Navigaton Channel

NOTES:

Horizontal Datum: WGS84. Projected coordinate system: Transverse Mercator, State Plane, Georgia East Zone, 1001, Surveyed in North American Datum of 1983/2011

Elevations are referenced to Mean Lower Low Water (MLLW) Datum. MLLW is defined by NOAA vDatum 4.4.2 for all USACE Surveys of Coastal Georgia.

This project was designed by The Savannah District of the U.S. Army Corps of Engineers. The initials and signatures and registration designations of individuals appear on these project documents within the scope of their employment as Required by ER1110-1-8152.

Notes:

The information depicted on this survey map represents the results of surveys made on the dates indicated and can only be considered as indicating the general conditions existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here. Required by 33 CFR 209.325

For the most up to date information please check our website at: WWW.SAS.USACE.ARMY.MIL


Notes:

The following equipment was used for this survey:
Knudsen dual-frequency Singlebeam Echosounder 28khz / 200khz
Trimble MPS-865 GPS Receiver
RTK radio tide correction for MLLW

1:2,000
SCALE IN FEET
0 100 200 400 600 800 1,000

US Army Corps of Engineers®
Savannah District





Survey Date: 8/26/2022	AuthorizedDepth:12ft. RequiredDepth:12ft.
Sheet 134 of 153	Map Number: 223 Overdepth:14ft.
Scale: 1:2,000	Side Slope Ratio: 3:1 (Rise : Run)
Processed by: Miles G. Saunders - Geographer / Hydrographer	
NAIP Imagery is provided by USDA-FPAC	
Imagery Date: December 2019	

HYDROGRAPHIC SURVEY

U.S. ARMY ENGINEER DISTRICT
CORPS OF ENGINEERS
SAVANNAH, GEORGIA

Atlantic Intercoastal Waterway
St Andrews Sound

Station: Mile 688.25 to Mile 689.25

AIWW

81°24'0"W 30°59'15"N | 81°24'5"W 30°59'10"N | 81°24'10"W 30°59'5"N | 81°24'15"W 30°59'0"N | 81°24'20"W | 81°24'25"W | 81°24'30"W | 81°24'35"W

689.75

690

690.25

690.5

689.5

St Andrew Sound
Lighted Buoy 32

81°24'30"W | 30°59'35"N | 81°24'35"W | 30°59'30"N | 81°24'40"W | 30°59'25"N | 81°24'45"W | 30°59'20"N | 81°24'50"W | 30°59'15"N | 81°24'55"W | 30°59'10"N | 81°25'0"W | 30°59'5"N | 81°25'5"W | 30°59'0"N

Elevation

15 and Deeper	8 - 10
14 - 15	7 - 8
12 - 14	6 - 7
10 - 12	4 - 6
	4 and Shallower

- Buoy
- Daybeacon
- Light
- Range
- Shoalest Sounding
- Navigaton Channel

NOTES:

Horizontal Datum: WGS84. Projected coordinate system: Transverse Mercator, State Plane, Georgia East Zone, 1001, Surveyed in North American Datum of 1983/2011

Elevations are referenced to Mean Lower Low Water (MLLW) Datum. MLLW is defined by NOAA vDatum 4.4.2 for all USACE Surveys of Coastal Georgia.

This project was designed by The Savannah District of the U.S. Army Corps of Engineers. The initials and signatures and registration designations of individuals appear on these project documents within the scope of their employment as Required by ER1110-1-8152.

Notes:

The information depicted on this survey map represents the results of surveys made on the dates indicated and can only be considered as indicating the general conditions existing at that time. These conditions are subject to rapid change due to shoaling events. A prudent mariner should not rely exclusively on the information provided here. Required by 33 CFR 209.325

For the most up to date information please check our website at: WWW.SAS.USACE.ARMY.MIL


Notes:

The following equipment was used for this survey:
Knudsen dual-frequency Singlebeam Echosounder 28khz / 200khz
Trimble MPS-865 GPS Receiver
RTK radio tide correction for MLLW

1:2,000
SCALE IN FEET
0 100 200 400 600 800 1,000

US Army Corps of Engineers®
Savannah District





Survey Date: 8/26/2022	Authorized Depth: 12ft. Required Depth: 12ft.
Sheet 135 of 153 Map Number: 224	Overdepth: 14ft.
Scale: 1:2,000	Side Slope Ratio: 3:1 (Rise : Run)
Processed by: Miles G. Saunders - Geographer / Hydrographer	
NAIP Imagery is provided by USDA-FPAC	
Imagery Date: December 2019	

HYDROGRAPHIC SURVEY

U.S. ARMY ENGINEER DISTRICT
CORPS OF ENGINEERS
SAVANNAH, GEORGIA

Atlantic Intercoastal Waterway
St Andrews Sound

Station: Mile 689.25 to Mile 690.5

AIWW