


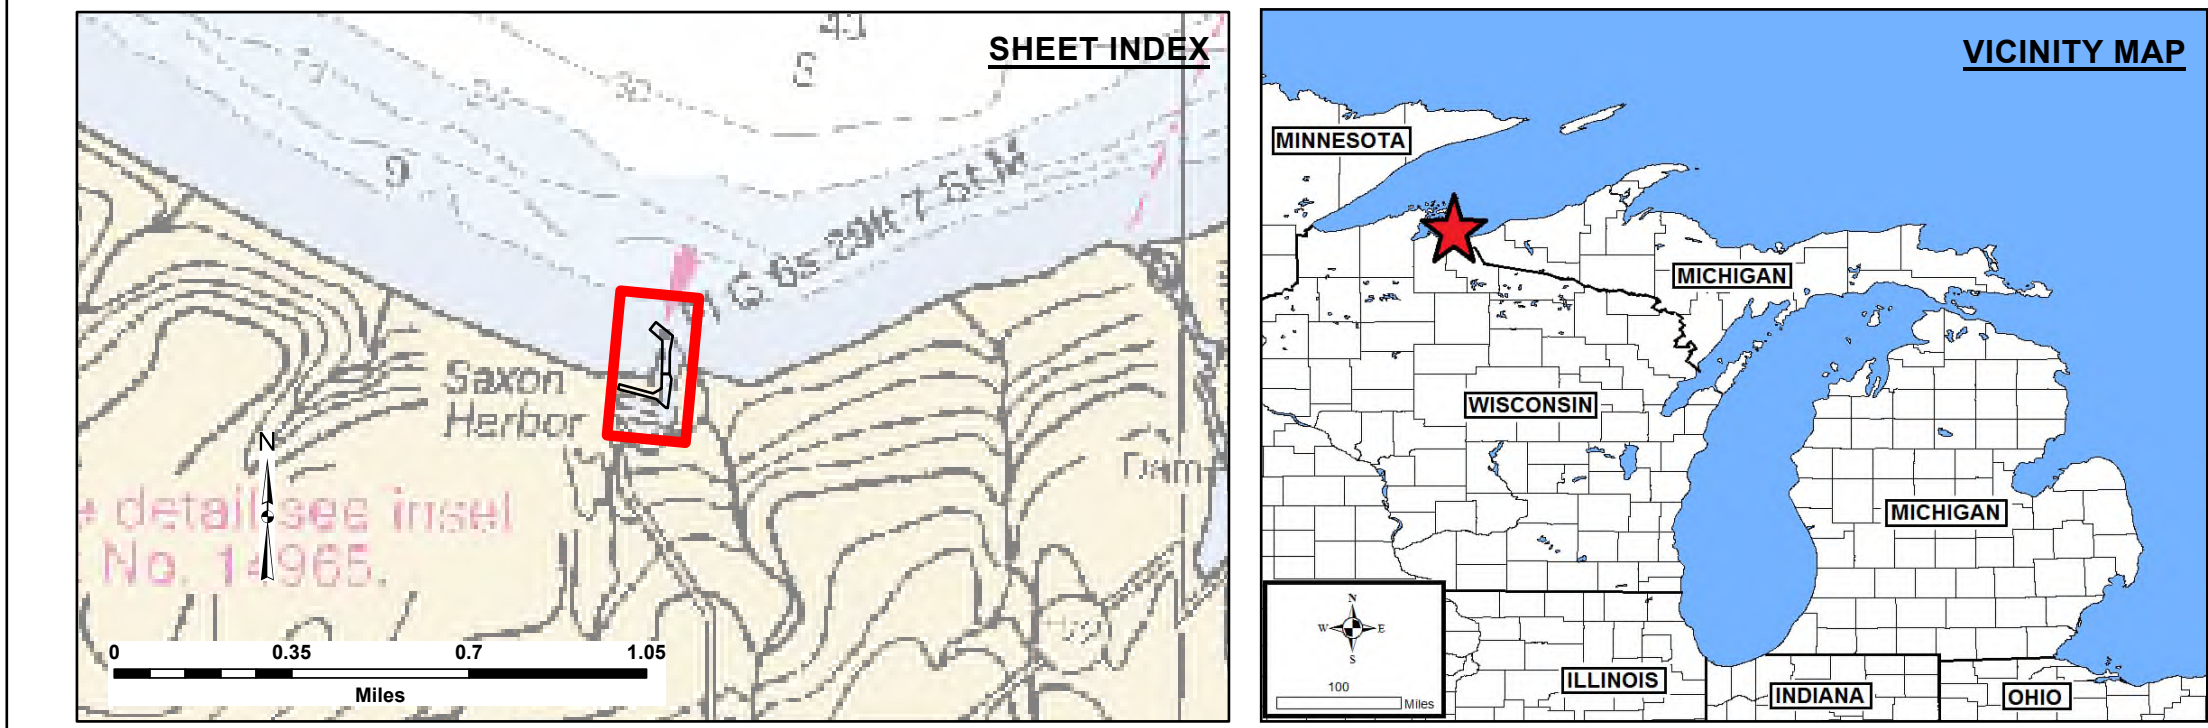


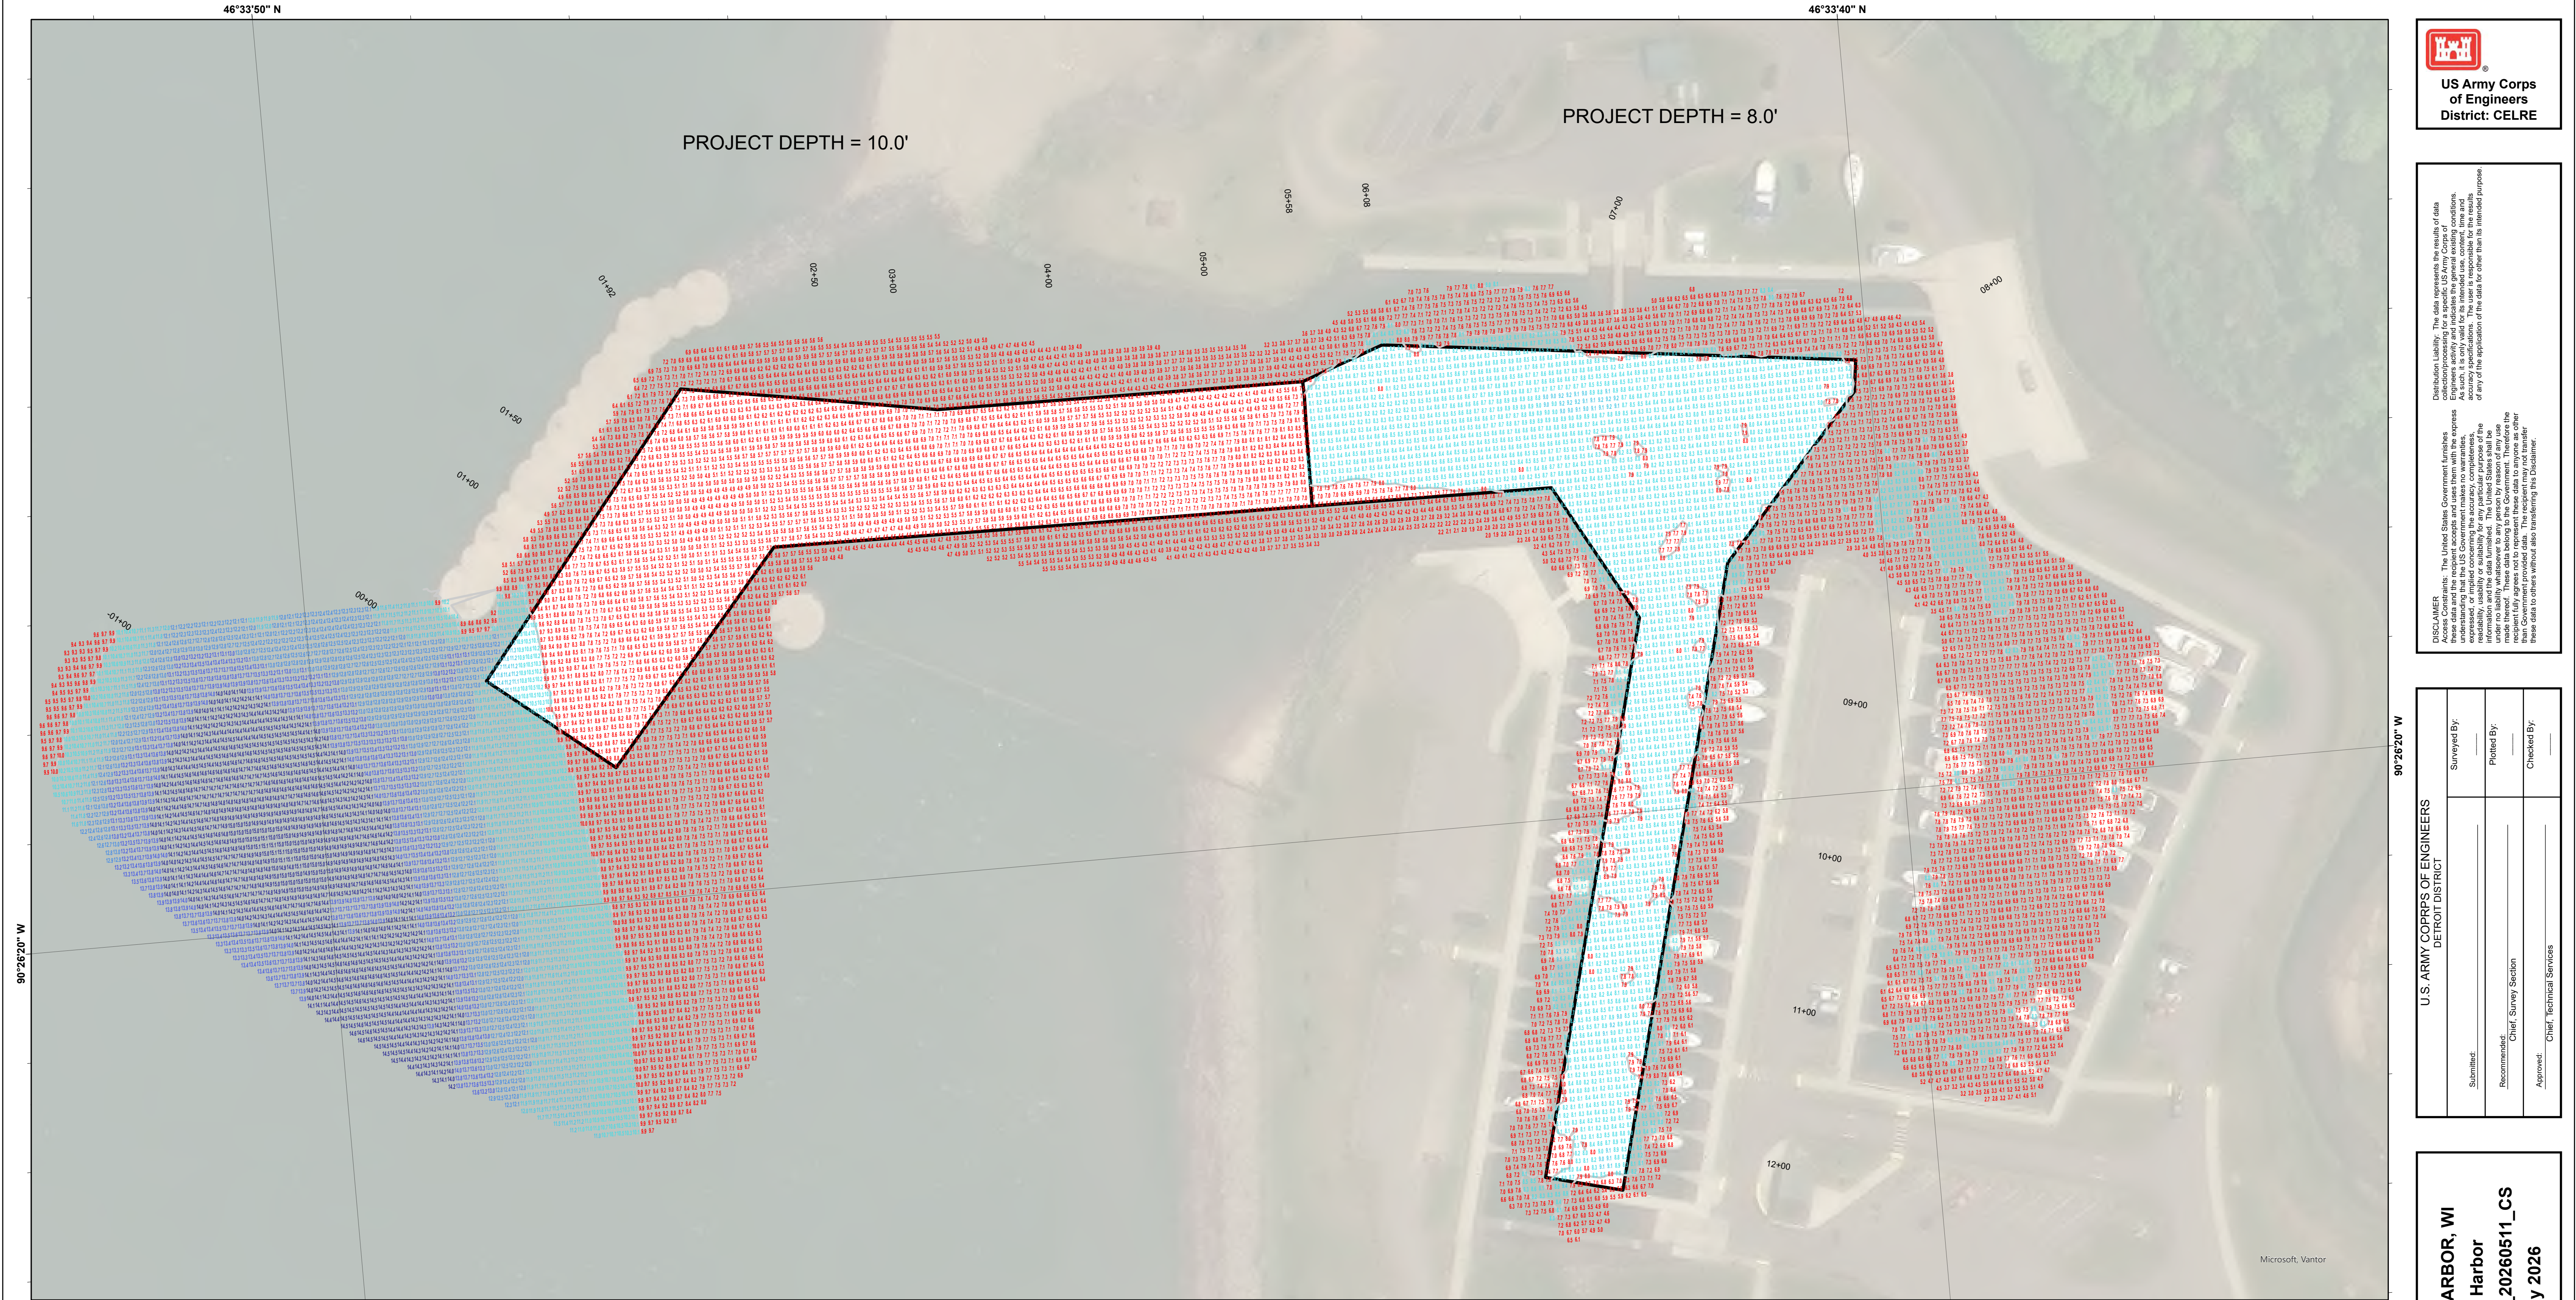

LEGEND
— Contour Lines
— Channel Limits

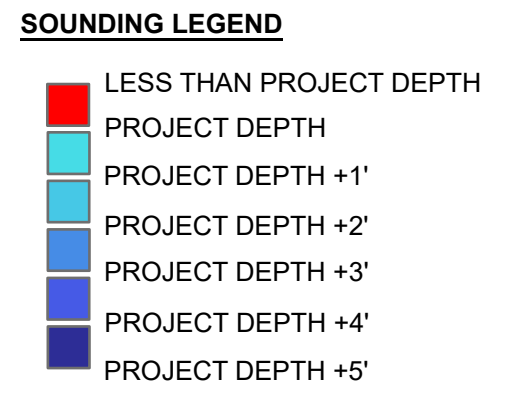

1 inch = 50 feet



- NOTES:**
1. THE CHARTED SOUNDINGS REPRESENT THE MINIMUM DEPTH MEASURED AT THE TIME OF THE SURVEY WITHIN THE 5' X 5' AREA CENTERED ON THE TEXT. DERIVED FROM A 1" X 1" AVERAGE DATASET AT CELL CENTER. THIS CHART SHOULD NOT BE USED FOR CHANNEL CLEARANCE OR VOLUME COMPUTATIONS. MINIMUM DEPTH DATA IS PRODUCED FOR STRIKE/SOAL REMOVAL OPERATIONS AND NOTICE TO NAVIGATION INSTRUSTIONS.
 2. ALL SOUNDING DEPTHS ARE REFERENCED TO INTERNATIONAL GREAT LAKES DATUM 1985 (IGLD 85) LOW WATER DATUM ELEVATION 601.1 FEET ABOVE MEAN WATER LEVEL AT RIMOUSKI, QUEBEC. WATER LEVEL READINGS WERE OBTAINED WITH REAL TIME KINEMATIC (RTK) GLOBAL POSITIONING SYSTEM (GPS) VALUES. DEPTHS ARE MEASURED USING A PING DSP 30DS-1DX-450 PRO SONAR.
 3. HORIZONTAL POSITIONING IS DETERMINED USING RTK GPS CORRECTIONS FROM A BASE STATION LOCATED AT US ARMY CORPS OF ENGINEERS (USACE) CONTROL POINT 1204. THE GPS RECEIVERS ARE MANUFACTURED BY TRIMBLE, MODEL R10, AND SEPTENTRIO, MODEL ASTERX-4, WHICH IS INTEGRATED IN THE SBG NAVISIGHT ERIXON INS.
 4. THE GRID SHOWN REFERENCES LATITUDE/LONGITUDE DISPLAYED AS DEGREES, MINUTES, SECONDS IN 10-SECOND INCRIMENTS.
 5. THE PROJECTS DEPTHS FOR THIS AREA ARE 8.0' AND 10.0'.
 6. AERIAL PHOTOGRAPHY DATA SOURCE: VANTOR, MICROSOFT

SAXON HARBOR, WI
Saxon Harbor
SA_01_XON_20260511_CS
11 May 2026

Sheet Reference Number 1 of 1