


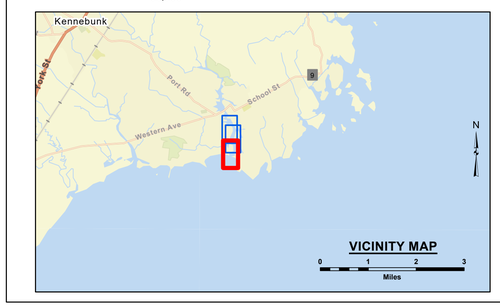

LEGEND

- Federal Navigation Channel
- Channel Center Line
- Cable or Pipeline Area
- Contour Line
- Marine Infrastructure*
- Fixed Navigation Aids
- Red Navigation Buoy
- Green Navigation Buoy
- Shoaling Area
- Shoalest Sounding**

** Shoalest Sounding per Quarter per Reach
*Present at time of Survey

GRAPHIC SCALE

1" = 100' 100 0 100 200 Feet

N W E S

Notes:

Horizontal Datum: Maine West, ME-1802 NAD 83
Distance Units: U.S. Survey Feet
Vertical Datum: MLLW
Depth Units: U.S. Survey Feet
Vessel Name: Celestial
Sonar System: R2 Sonic 2024 (Multibeam Sonar)
Sounding Frequency: 300 kHz
Survey Method: RTK GPS Tides
GPS_System: Applanix POS MV (RTK)
RTK Base Station: Habel (2022)
Software Used: Hypack
Sounding Sort Distance: 30'
Field Books: R&H 4985
Survey No.: ME_63_KNR_20250319_CS_017
Reference NOAA Chart No.: ENC US5ME1CF&US5ME1DF

The information depicted on these charts represents the results of surveys made on the dates indicated, and can only be considered as indicating the conditions existing at that time.

General Notes

The sounding information shown on this map represents the SHOALEST soundings of those obtained from hydrographic surveys conducted during March 2025. The positions of aids to navigation were located during survey operations, are provided for information only and should not be used for navigation. Orthoimagery is from a variety of sources and dates and is intended to portray general characteristics of the shoreline and other features. Temporal changes may have occurred since this dataset was collected and some parts may no longer be an accurate representation of the conditions. The information depicted on this map should NOT be used to determine volumes as volumes are determined from more sounding information than shown.

Project Remarks

Marine infrastructure surveyed with Lidar.

Water Level Information

Tides were recorded using RTK GPS. NAVD88 to MLLW corrections were logged utilizing NOAA's V-Datum regional model ME/NH/MA Region Version 2.3. The corrections in the project area is 5.09 feet. MLLW is below NAVD88; therefore, the correction should be added to NAVD88 to convert to MLLW (e.g.-10 NAV88 = -8 MLLW when using a 2-foot correction).

US Army Corps of Engineers
District: CENAE

Distribution Liability: The data represents the results of data collection and analysis performed by the Corps of Engineers activity and indicates the general existing conditions. Engineers activity and indicates the general existing conditions. The user is responsible for determining suitability of these results for any application of this data for other than its intended purposes.

DISCLAIMER
Access Constraints: The United States Government furnishes these data and information with the understanding that it does not make any warranty, express or implied concerning the accuracy, completeness, reliability, or suitability of this information. Neither the United States Government nor any of its employees makes any warranty of the information and the data furnished. The United States shall be under no liability whatsoever to any person by reason of any use made thereof. These data belong to the Government. Therefore the recipient fully agrees not to represent these data to anyone as other than Government data. The recipient shall not transfer these data to others without also transferring this Disclaimer.

U.S. ARMY CORPS OF ENGINEERS
NEW ENGLAND DISTRICT

SUBMITTED BY: Josh Bromberg
APPROVED BY: NAE Survey

SURVEYED BY: MJV
CHECKED BY: WHW
ISSUE DATE: 3/24/2025
SIZE: ANSI D
MAP DOCUMENT: ME_63_KNR_20250319_CS_017


KENNEBUNK RIVER
KENNEBUNK AND KENNEBUNKPORT
MAINE
CONDITION SURVEY
6 AND 8-FOOT CHANNELS
6-FOOT ANCHORAGES


File Name: ME_63_KNR_20250319_CS_017

SHEET IDENTIFICATION
Kennebunk River

Sheet 1 of 3

Revison Number: 5.24.09.03-5.24.09.03

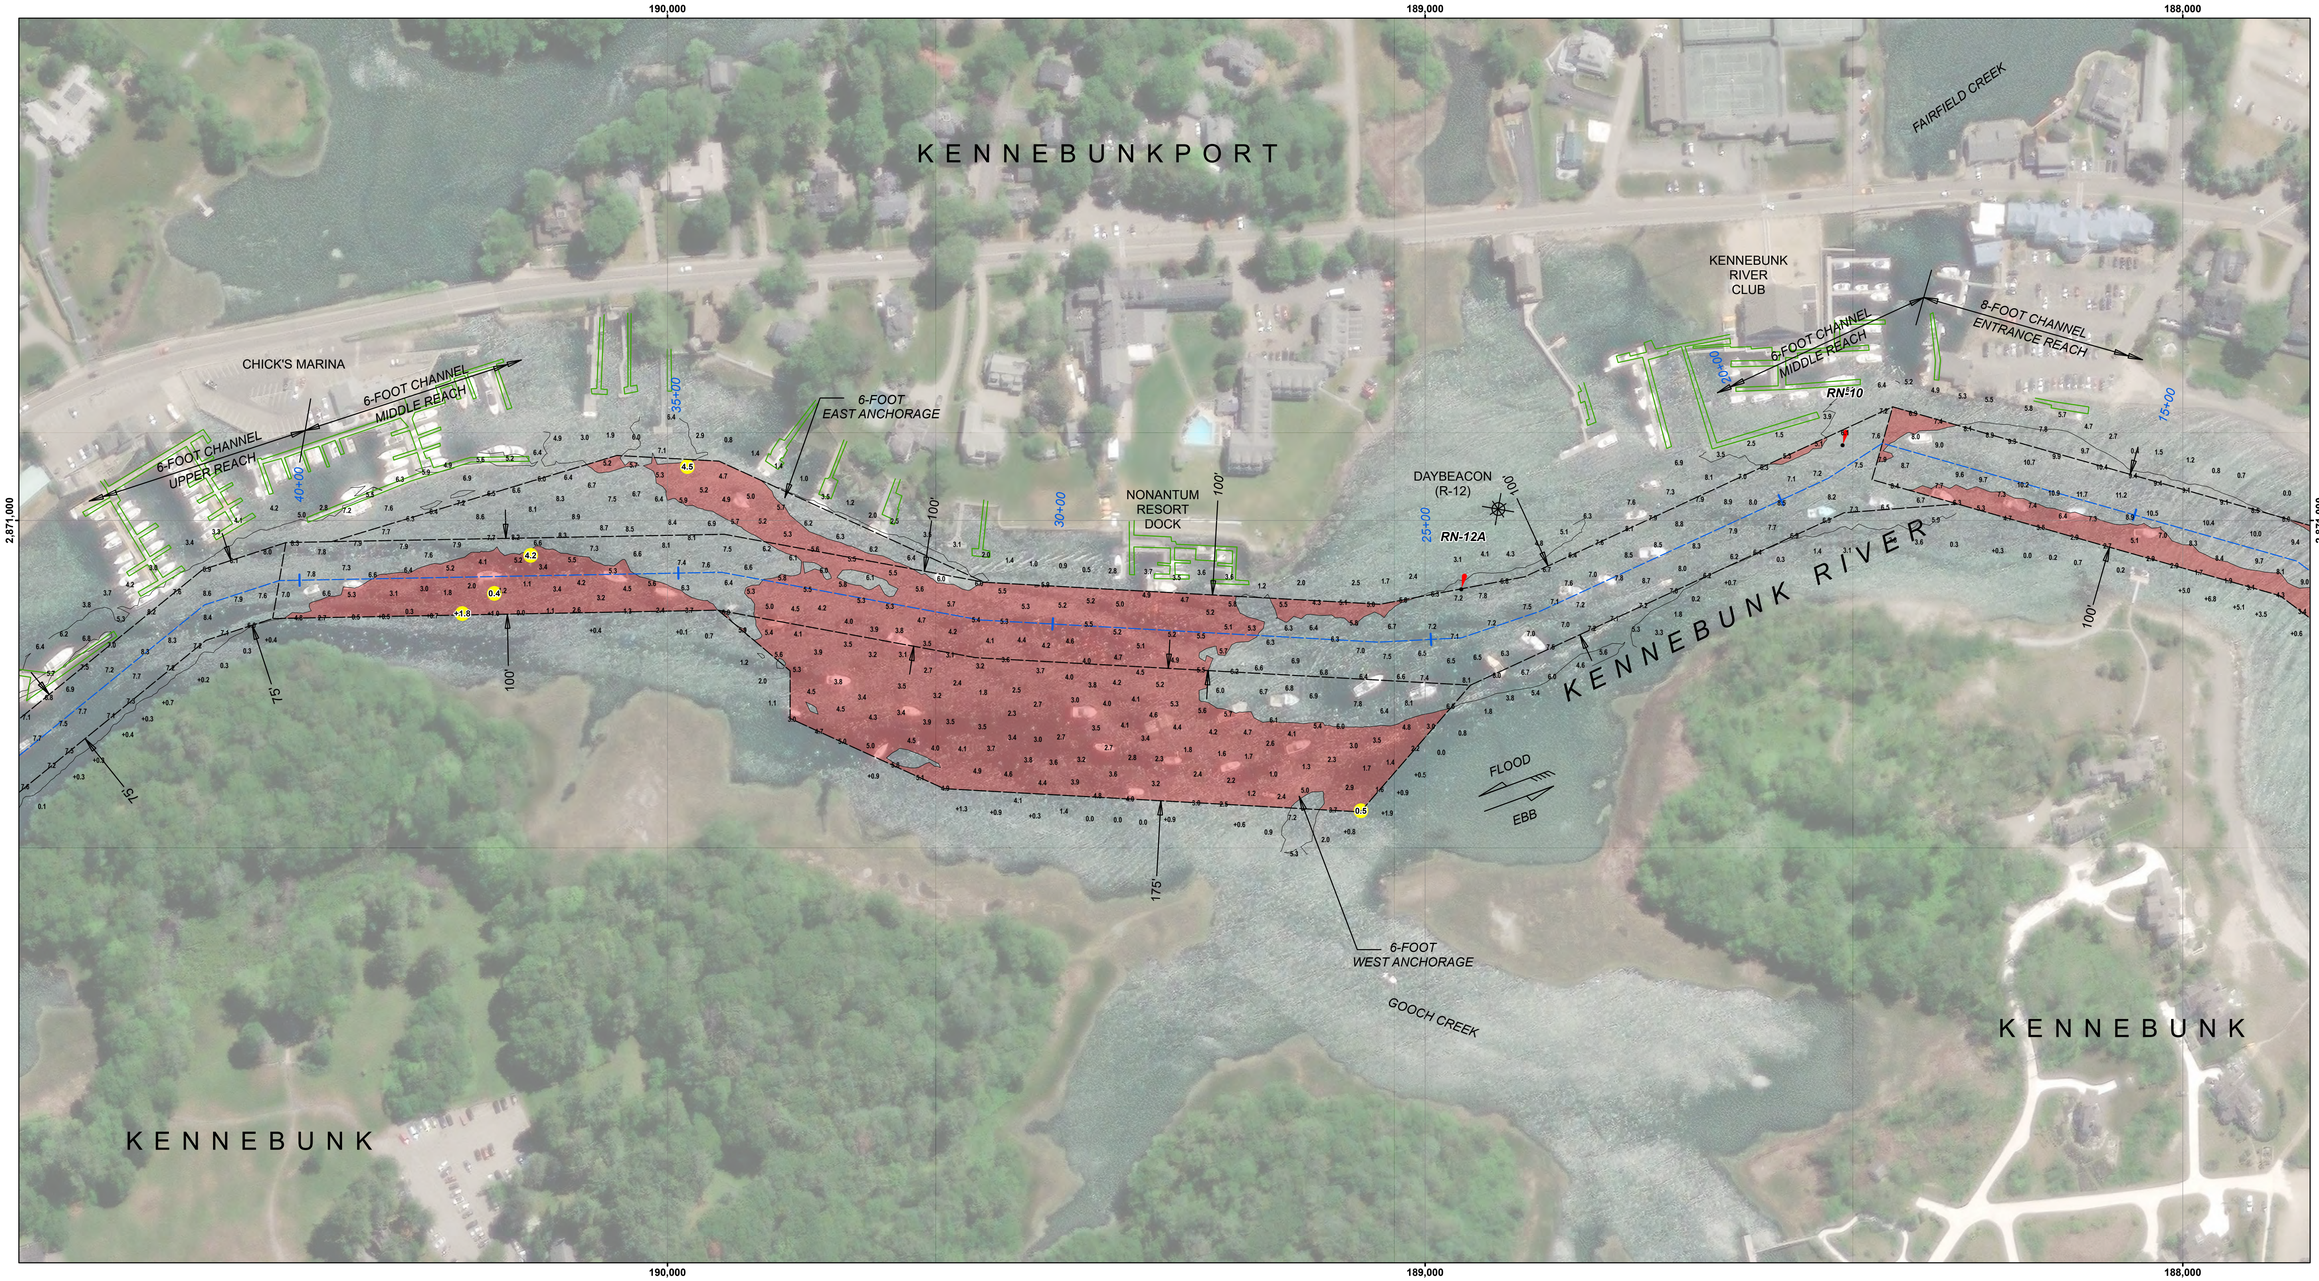

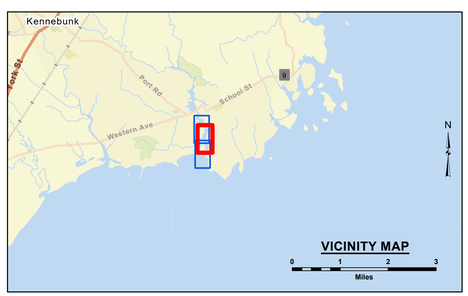

LEGEND

- Federal Navigation Channel
- Channel Center Line
- Cable or Pipeline Area
- Contour Line
- Marine Infrastructure*
- Fixed Navigation Aids
- Red Navigation Buoy
- Green Navigation Buoy
- Shoaling Area
- Shoalest Sounding**

** Shoalest Sounding per Quarter per Reach
*Present at time of Survey

GRAPHIC SCALE

100 0 100 200

1" = 100' Feet

N E S W

Notes:

Horizontal Datum: Maine West, ME-1802 NAD 83
Distance Units: U.S. Survey Feet
Vertical Datum: MLLW
Depth Units: U.S. Survey Feet
Vessel Name: Celestial
Sonar System: R2 Sonic 2024 (Multibeam Sonar)
Sounding Frequency: 300 kHz
Survey Method: RTK GPS Tides
GPS_System: Applanix POS MV (RTK)
RTK Base Station: Habel (2022)
Software Used: Hypack
Sounding Sort Distance: 30'
Field Books: R&H 4985
Survey No.: ME_63_KNR_20250319_CS_017
Reference NOAA Chart No.: ENC US5ME1CF&US5ME1DF

The information depicted on these charts represents the results of surveys made on the dates indicated, and can only be considered as indicating the conditions existing at that time.

General Notes

The sounding information shown on this map represents the SHOALEST soundings of those obtained from hydrographic surveys conducted during March 2025. The positions of aids to navigation were located during survey operations, are provided for information only and should not be used for navigation. Orthoimagery is from a variety of sources and dates and is intended to portray general characteristics of the shoreline and other features. Temporal changes may have occurred since this dataset was collected and some parts may no longer be an accurate representation of the conditions. The information depicted on this map should NOT be used to determine volumes as volumes are determined from more sounding information than shown.

Project Remarks

Marine infrastructure surveyed with Lidar.

Water Level Information

Tides were recorded using RTK GPS. NAVD88 to MLLW corrections were logged utilizing NOAA's V-Datum regional model ME/NH/MA Region Version 2.3. The corrections in the project area is 5.09 feet. MLLW is below NAVD88; therefore, the correction should be added to NAVD88 to convert to MLLW (e.g.-10 NAV88 = -8 MLLW when using a 2-foot correction).

US Army Corps of Engineers
District: CENAE

DISCLAIMER

Access Constraints: The United States Government furnishes this map and the data contained therein with the expressed understanding that the US Government makes no warranties, expressed or implied concerning the accuracy, completeness, reliability, usability, or suitability for any particular purpose of the information and the data furnished. The United States shall be under no liability whatsoever to any individual or any party for any action taken in reliance on the information furnished hereon. These data belong to the Government. Therefore the recipient fully agrees not to represent these data to anyone as other than Government data. The recipient also agrees to hold harmless the Government from any damages resulting from the use of these data to others without also transferring this Disclaimer.

Distribution Liability: The data represents the results of data collection and analysis performed by the District Corps of Engineers activity and indicates the general existing conditions. Engineers activity and indicates the general existing conditions. Data is provided without warranty of any kind, either expressed or implied, including but not limited to, the implied warranties of accuracy, completeness, timeliness, and fitness for a particular purpose. The user is responsible for the results of any of the application of this data for other than its intended purpose.

U.S. ARMY CORPS OF ENGINEERS
NEW ENGLAND DISTRICT

SURVEYED BY: MJV
CHECKED BY: WHW
ISSUE DATE: 3/24/2025

SUBMITTED BY: Josh Bromberg
APPROVED BY: NAE Survey

SIZE: ANSI D

MAP DOCUMENT: ME_63_KNR_20250319_CS_017


KENNEBUNK RIVER
KENNEBUNK AND KENNEBUNKPORT
MAINE
CONDITION SURVEY
6 AND 8-FOOT CHANNELS
6-FOOT ANCHORAGES


File Name: ME_63_KNR_20250319_CS_017

SHEET IDENTIFICATION
Kennebunk River

Sheet 2 of 3

Revison Number: 5.24.09.03-5.24.09.03

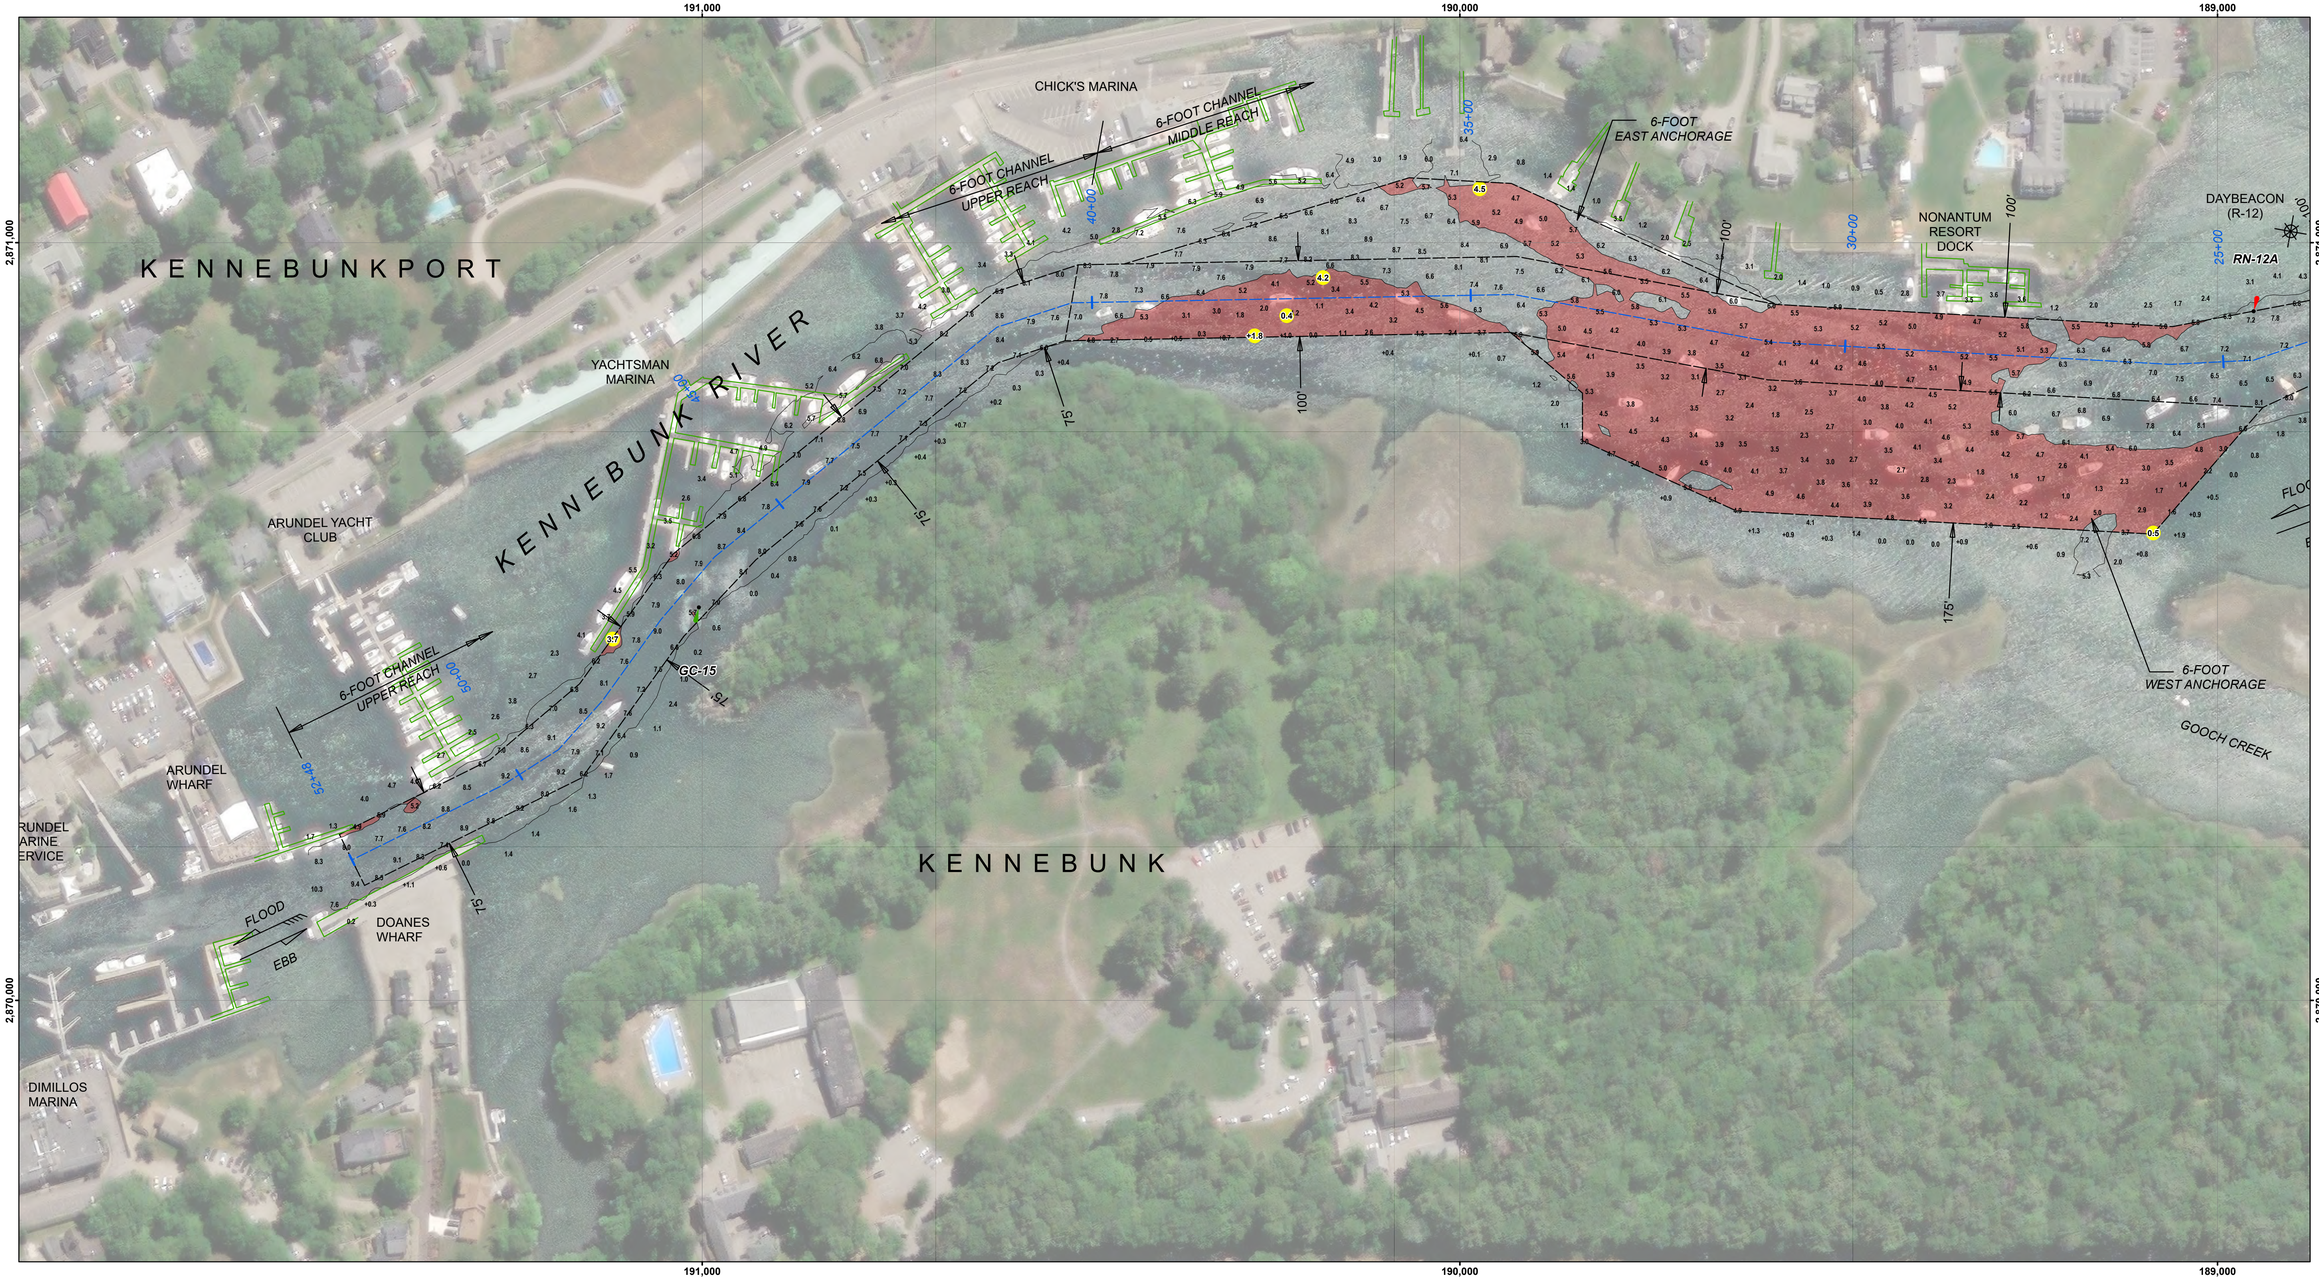

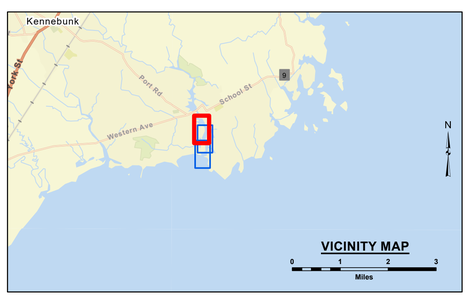

LEGEND

- Federal Navigation Channel
- Channel Center Line
- Cable or Pipeline Area
- Contour Line
- Marine Infrastructure*
- Fixed Navigation Aids
- Red Navigation Buoy
- Green Navigation Buoy
- Shoaling Area
- Shoalest Sounding**

** Shoalest Sounding per Quarter per Reach
*Present at time of Survey

GRAPHIC SCALE

1" = 100' 100 0 100 200 Feet

N E S W

Notes:

Horizontal Datum: Maine West, ME-1802 NAD 83
Distance Units: U.S. Survey Feet
Vertical Datum: MLLW
Depth Units: U.S. Survey Feet
Vessel Name: Celestial
Sonar System: R2 Sonic 2024 (Multibeam Sonar)
Sounding Frequency: 300 kHz
Survey Method: RTK GPS Tides
GPS_System: Applanix POS MV (RTK)
RTK Base Station: Habel (2022)
Software Used: Hypack
Sounding Sort Distance: 30'
Field Books: R&H 4985
Survey No.: ME_63_KNR_20250319_CS_017
Reference NOAA Chart No.: ENC US5ME1CF&US5ME1DF

The information depicted on these charts represents the results of surveys made on the dates indicated, and can only be considered as indicating the conditions existing at that time.

General Notes

The sounding information shown on this map represents the SHOALEST soundings of those obtained from hydrographic surveys conducted during March 2025. The positions of aids to navigation were located during survey operations, are provided for information only and should not be used for navigation. Orthoimagery is from a variety of sources and dates and is intended to portray general characteristics of the shoreline and other features. Temporal changes may have occurred since this dataset was collected and some parts may no longer be an accurate representation of the conditions. The information depicted on this map should NOT be used to determine volumes as volumes are determined from more sounding information than shown.

Project Remarks

Marine infrastructure surveyed with Lidar.

Water Level Information

Tides were recorded using RTK GPS. NAVD88 to MLLW corrections were logged utilizing NOAA's V-Datum regional model ME/NH/MA Region Version 2.3. The corrections in the project area is 5.09 feet. MLLW is below NAVD88; therefore, the correction should be added to NAVD88 to convert to MLLW (e.g.-10 NAV88 = -8 MLLW when using a 2-foot correction).

US Army Corps of Engineers
District: CENAE

Distribution Liability: The data represents the results of data collection and analysis performed by the Corps of Engineers activity and indicates the general existing conditions. Each user is responsible for determining whether the data is suitable for their purposes. The user is responsible for the results of any of the application of this data for other than its intended purpose.

DISCLAIMER
Access Constraints: The United States Government furnishes this data and map without warranty, with the understanding that the US Government makes no warranties, expressed or implied concerning the accuracy, completeness reliability, usability, or suitability for any particular purpose of the information and the data furnished. The United States shall be under no liability whatsoever to any person by reason of any use made thereof. These data belong to the Government. Therefore the recipient fully agrees not to represent these data to anyone as other than government data. The recipient also agrees to hold the US Government harmless from any damages resulting from the use of these data to others without also transferring this Disclaimer.

U.S. ARMY CORPS OF ENGINEERS
NEW ENGLAND DISTRICT

SURVEYED BY: MJV
CHECKED BY: WHW
ISSUE DATE: 3/24/2025
SUBMITTED BY: Josh Bromberg
APPROVED BY: NAE Survey
MAP DOCUMENT: ME_63_KNR_20250319_CS_017
SIZE: ANSI D

KENNEBUNK RIVER
KENNEBUNK AND KENNEBUNKPORT
MAINE
CONDITION SURVEY
6 AND 8-FOOT CHANNELS
6-FOOT ANCHORAGES
File Name: ME_63_KNR_20250319_CS_017

SHEET IDENTIFICATION
Kennebunk River

Sheet 3 of 3

Revison Number: 5.24.09.03-5.24.09.03