


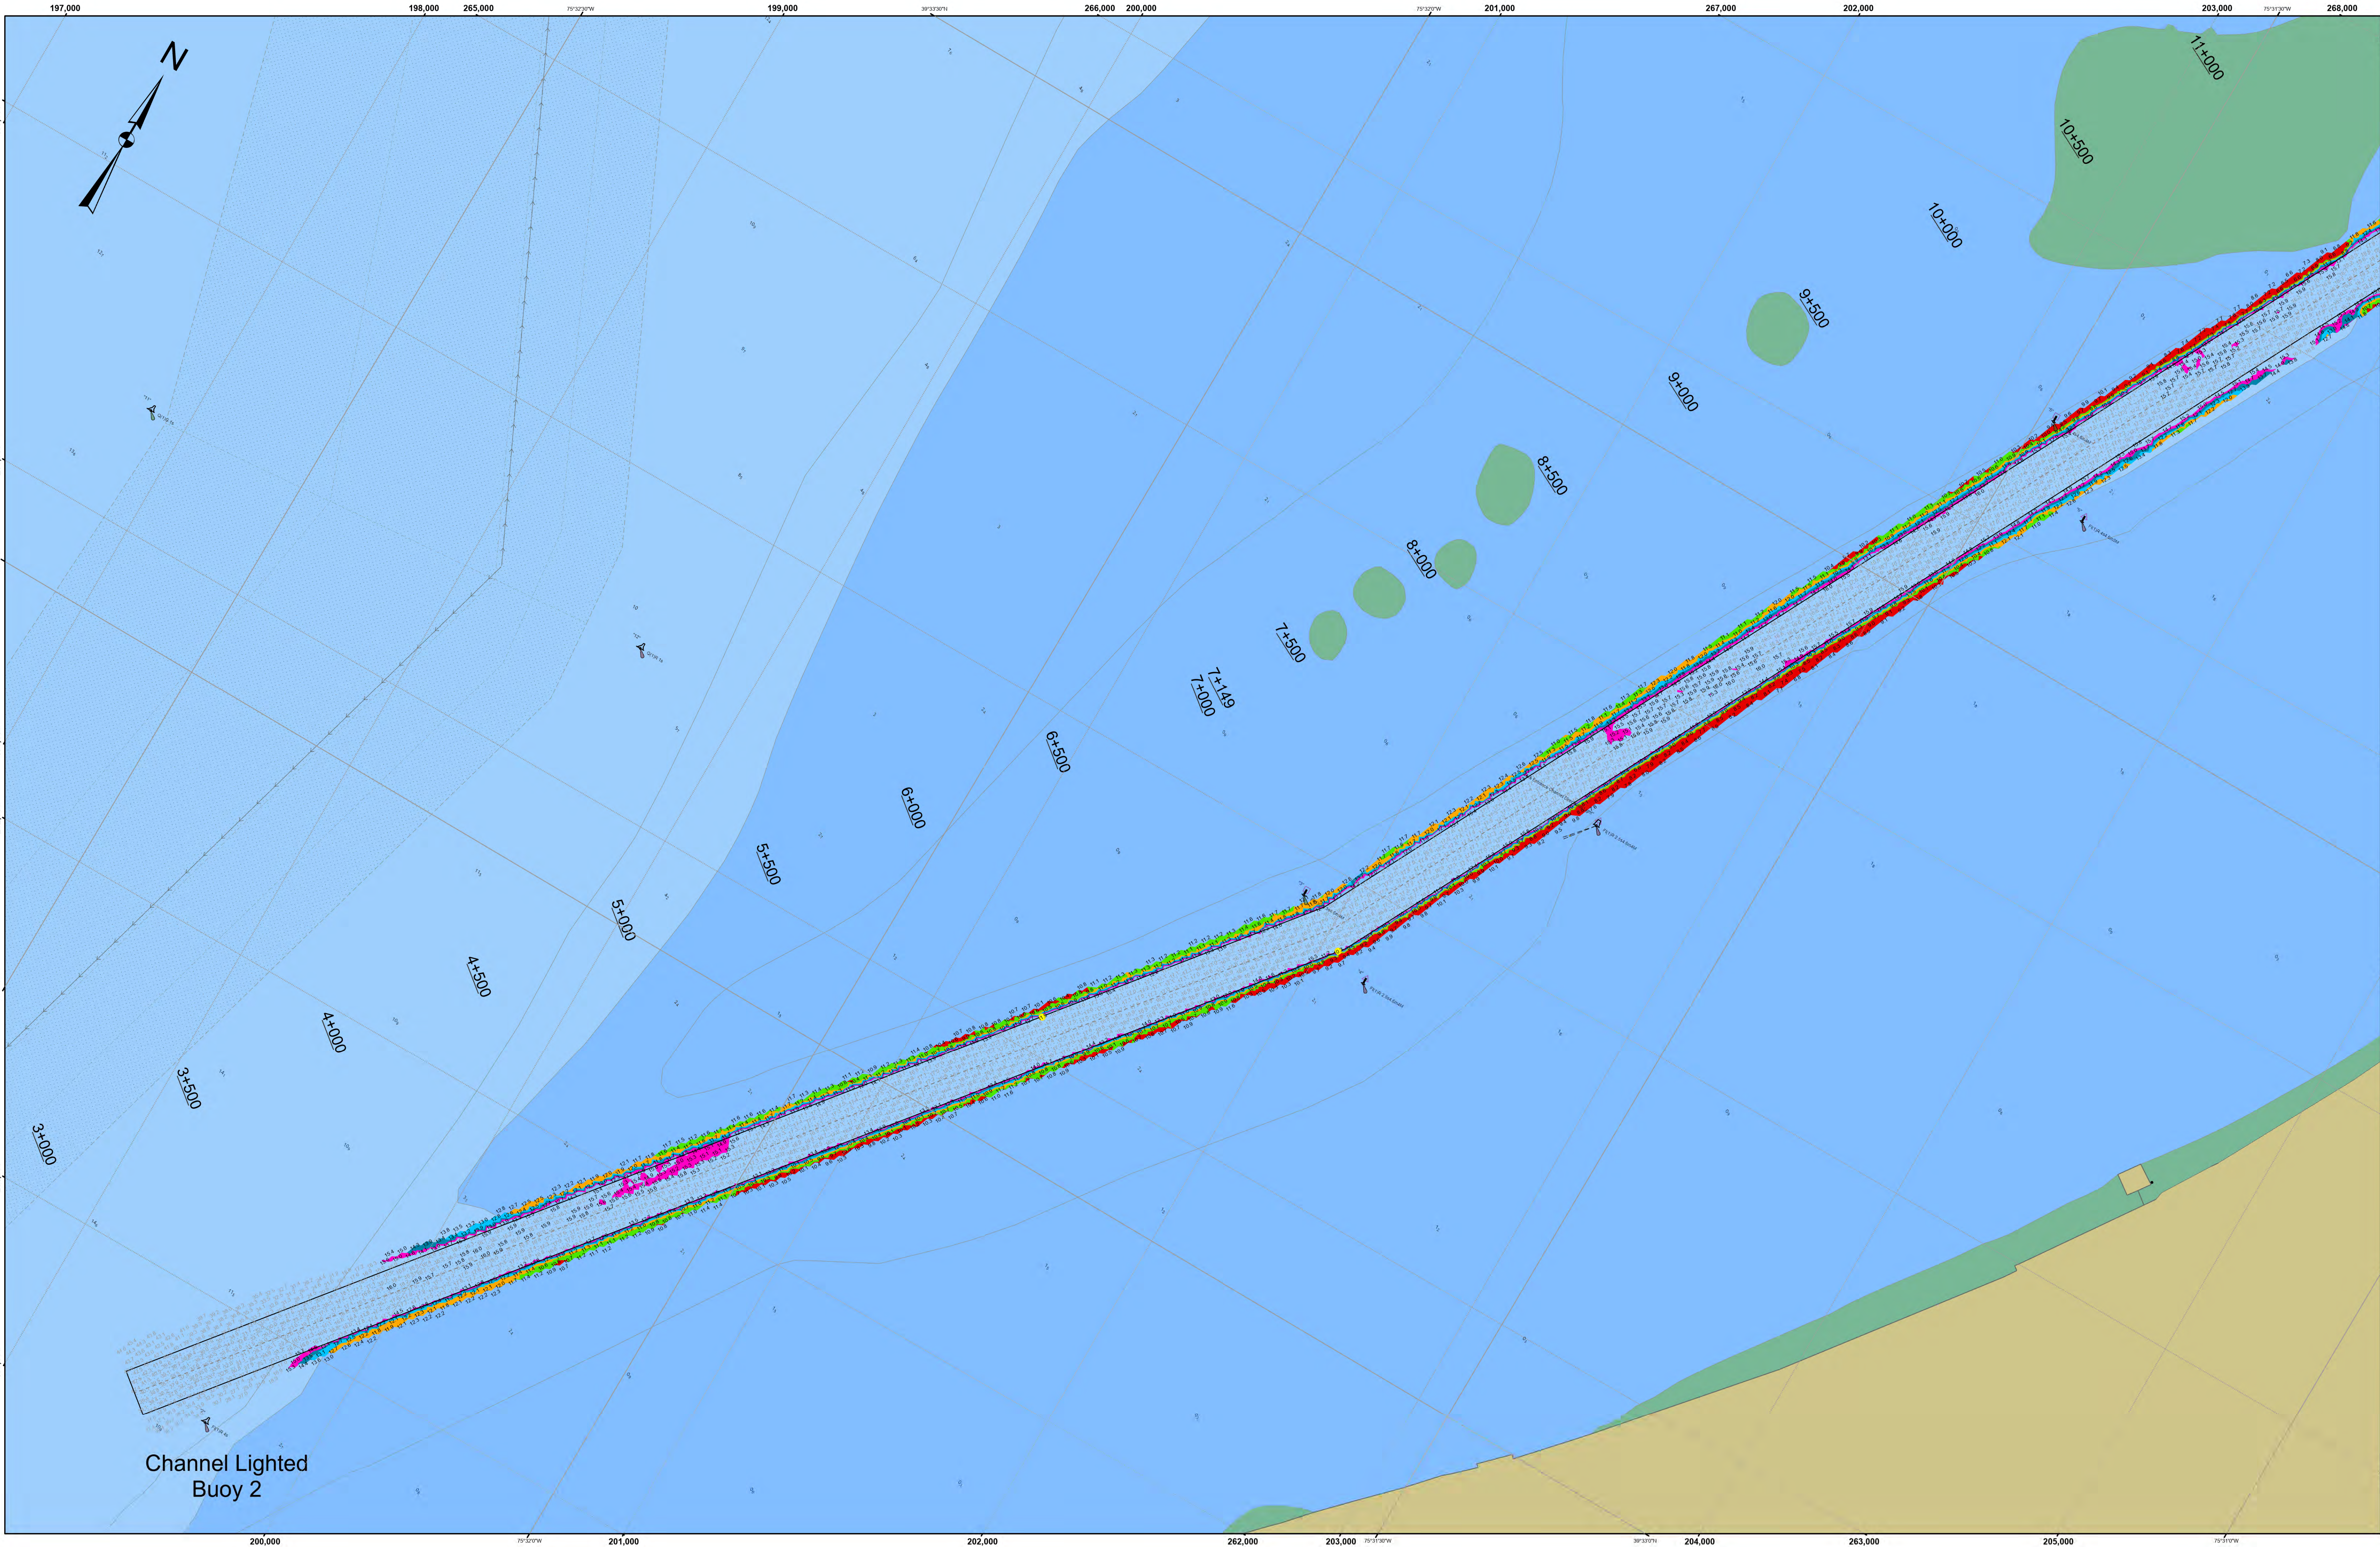

1. THIS SURVEY MEETS STANDARDS AS OUTLINED IN CORPS OF ENGINEERS' HYDROGRAPHIC SURVEY MANUAL EM1110-2-1003, DATED NOVEMBER 30, 2013 FOR NAVIGATION AND DREDGING SUPPORT SURVEYS.
2. HORIZONTAL REFERENCE - NAD 83, NEW JERSEY STATE PLANE, ZONE 2900, U.S. FOOT.
3. VERTICAL REFERENCE - MEAN LOWER LOW WATER, WHICH IS 2.97' BELOW N.A.V.D. 88.
4. GEOID 12B AND NOAA TIDAL EPOCH: 1983 - 2001 WERE USED. SOUNDINGS ARE EXPRESSED IN FEET AND TENTHS AND REFER TO MEAN LOWER LOW WATER.

5. HYPACK, INC. SOFTWARE WAS USED TO PERFORM THE SOUNDING SELECTION AND CONTOUR GENERATION.
6. THE INFORMATION DEPICTED ON THIS MAP REPRESENT THE RESULTS OF SURVEYS MADE ON THE DATES INDICATED AND CAN ONLY BE CONSIDERED AS INDICATING THE GENERAL CONDITIONS EXISTING AT THAT TIME.

7. THE POSITIONS OF THE AIDS TO NAVIGATION ARE PROVIDED FOR INFORMATION ONLY, AND SHOULD NOT BE USED FOR NAVIGATION.
8. THE LIMITS OF THE FEDERAL CHANNEL DEPICT THE MOST CURRENT CHANNEL FRAMEWORK AVAILABLE WHICH CAN ALSO BE DOWNLOADED HERE:
<http://navigation.usace.army.mil/Survey/Framework>

9. BASE MAPPING LINEWORK OR ORTHOPHOTOGRAPHY HAS BEEN COMPILED FROM A VARIETY OF SOURCES AND DATES AND IS INTENDED TO PORTRAY GENERAL CHARACTERISTICS OF THE SHORELINE AND OTHER FEATURES. TEMPORAL CHANGES MAY HAVE OCCURRED SINCE THIS DATA SET WAS COLLECTED AND SOME PARTS OF THE DATA MAY NO LONGER BE AN ACCURATE REPRESENTATION OF THE SURFACE CONDITIONS.



- Shoalest Sounding per Quarter
- CenterLine
- ToeLine
- StationLine
- 16 - 59.91
- 15 - 16
- 14 - 15
- 13 - 14
- 12 - 13
- 11 - 12
- 4.1 - 11





STA. 3+000 to STA. 3+200 -- 19 NOV 25
STA. 3+200 to STA. 8+000 -- 04 AUG 26
STA. 8+000 to STA. 13+000 -- 06 AUG 26
STA. 13+000 to STA. 16+500 -- 13 AUG 26
STA. 16+500 to STA. 23+700 -- 10 AUG 26
STA. 23+700 to STA. 25+200 -- 06 AUG 26
STA. 25+200 to STA. 25+778 -- 21 NOV 25

DISCLAIMER
This data is provided for general information only. It is not intended for use in navigation. The government makes no representation or warranty, expressed or implied, including but not limited to, accuracy, completeness, or timeliness. The government disclaims any liability for the use of this data for any purpose other than that for which it was collected, and any changes suffered in the course of use, modification, or reproduction are the user's responsibility.

U.S. ARMY CORPS OF ENGINEERS PHILADELPHIA DISTRICT	
Drawing No.	Surveyed By
Sheet No.	Plotted By
Scale	E. Anthony
Approved	Checked By
Chief, Survey Section	

SALEM RIVER
STA. 0+000 to STA. 25+783
EXAMINATION

E-SA-13

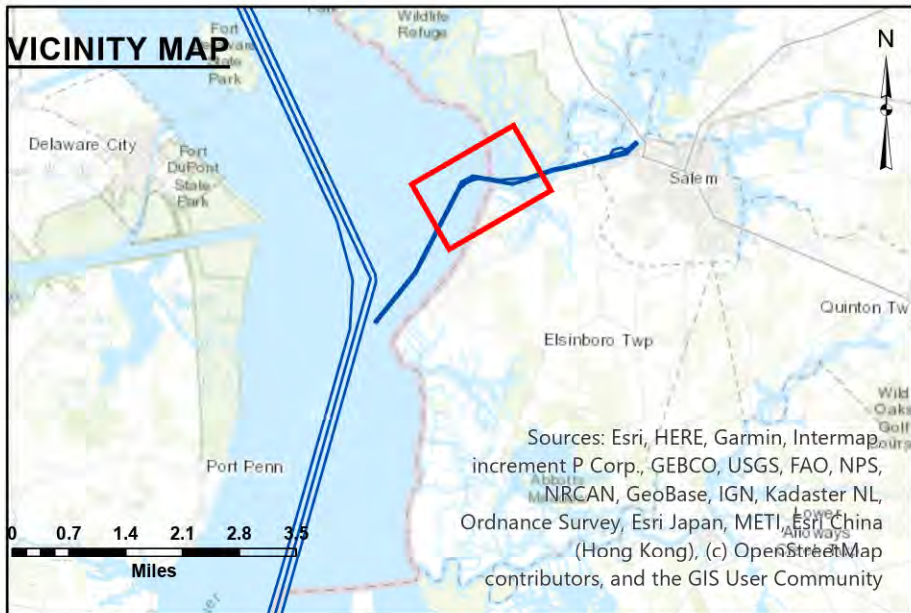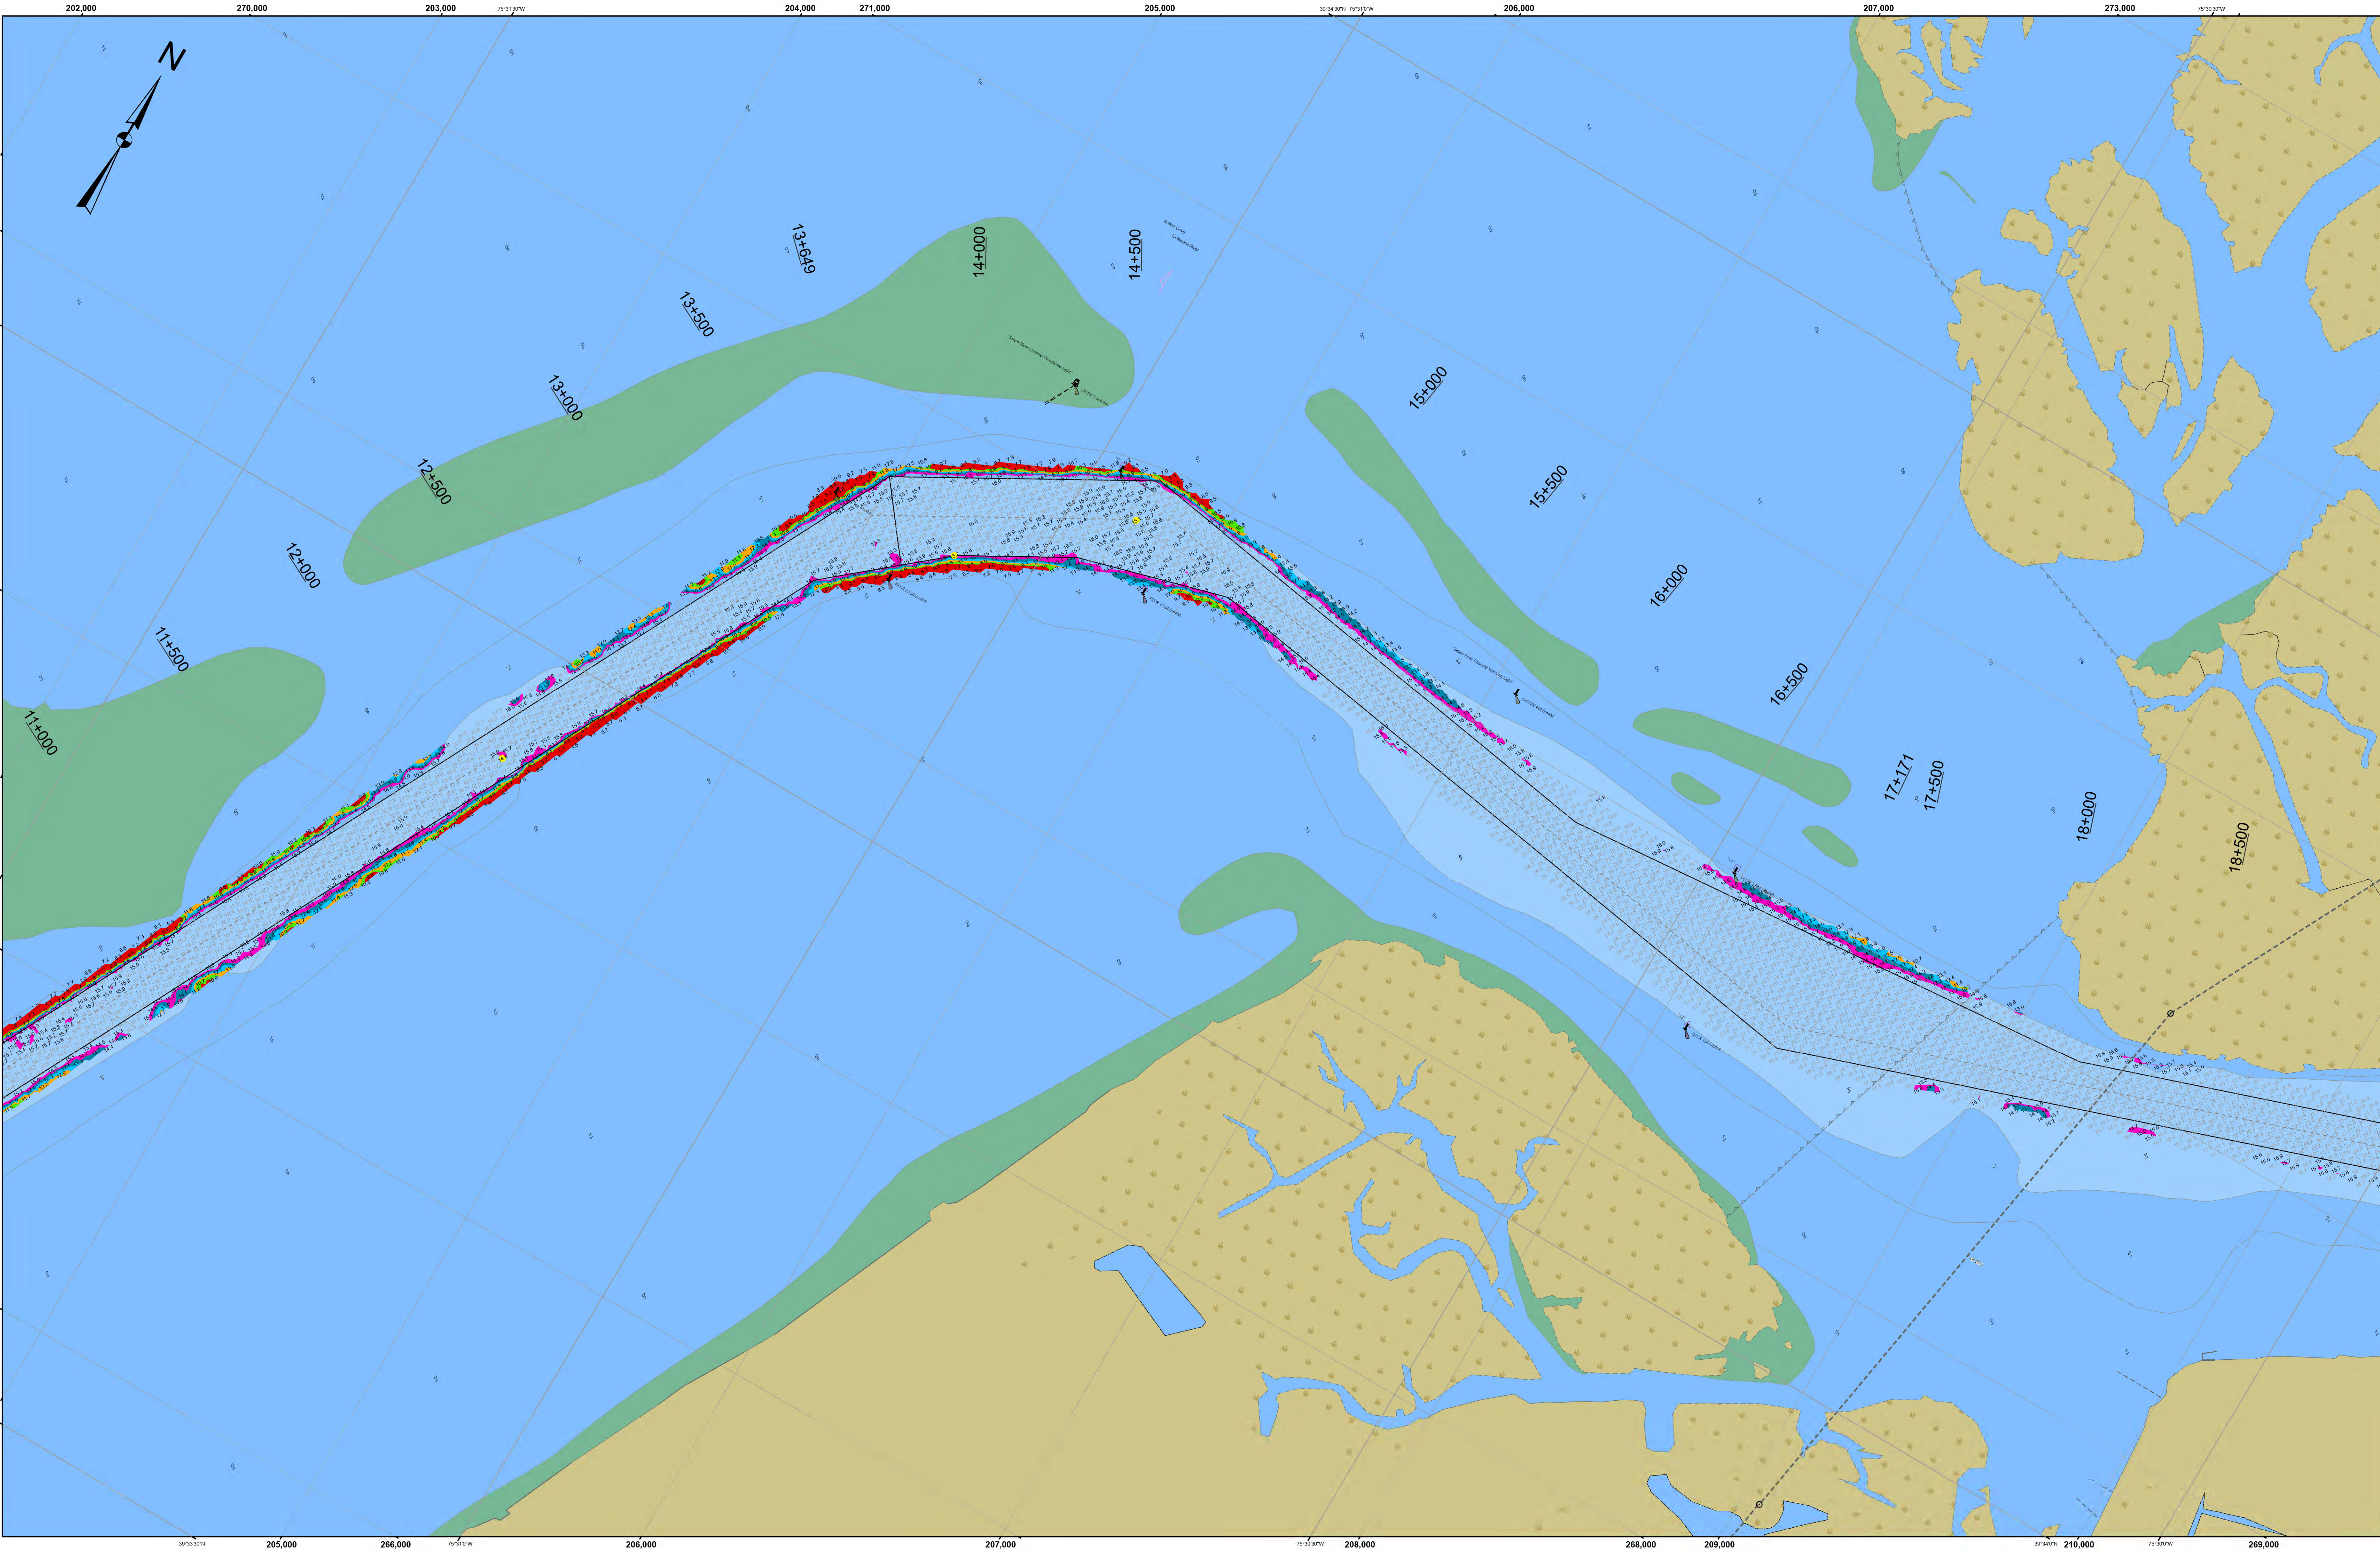

1. THIS SURVEY MEETS STANDARDS AS OUTLINED IN CORPS OF ENGINEERS' HYDROGRAPHIC SURVEY MANUAL EM1110-2-1003, DATED NOVEMBER 30, 2013 FOR NAVIGATION AND DREDGING SUPPORT SURVEYS.
2. HORIZONTAL REFERENCE - NAD 83, NEW JERSEY STATE PLANE, ZONE 2900, U.S. FOOT.
3. VERTICAL REFERENCE - MEAN LOWER LOW WATER, WHICH IS 2.97' BELOW N.A.V.D. 88.
4. GEOID 12B AND NOAA TIDAL EPOCH: 1983 - 2001 WERE USED. SOUNDINGS ARE EXPRESSED IN FEET AND TENTHS AND REFER TO MEAN LOWER LOW WATER.

5. HYPACK, INC. SOFTWARE WAS USED TO PERFORM THE SOUNDING SELECTION AND CONTOUR GENERATION.
6. THE INFORMATION DEPICTED ON THIS MAP REPRESENT THE RESULTS OF SURVEYS MADE ON THE DATES INDICATED AND CAN ONLY BE CONSIDERED AS INDICATING THE GENERAL CONDITIONS EXISTING AT THAT TIME.

7. THE POSITIONS OF THE AIDS TO NAVIGATION ARE PROVIDED FOR INFORMATION ONLY, AND SHOULD NOT BE USED FOR NAVIGATION.
8. THE LIMITS OF THE FEDERAL CHANNEL DEPICT THE MOST CURRENT CHANNEL FRAMEWORK AVAILABLE WHICH CAN ALSO BE DOWNLOADED HERE:
<http://navigation.usace.army.mil/Survey/Framework>

9. BASE MAPPING LINEWORK OR ORTHOPHOTOGRAPHY HAS BEEN COMPILED FROM A VARIETY OF SOURCES AND DATES AND IS INTENDED TO PORTRAY GENERAL CHARACTERISTICS OF THE SHORELINE AND OTHER FEATURES. TEMPORAL CHANGES MAY HAVE OCCURRED SINCE THIS DATA SET WAS COLLECTED AND SOME PARTS OF THE DATA MAY NO LONGER BE AN ACCURATE REPRESENTATION OF THE SURFACE CONDITIONS.



- Shoalest Sounding per Quarter
- CenterLine
- ToeLine
- StationLine
- 16 - 59.91
- 15 - 16
- 14 - 15
- 13 - 14
- 12 - 13
- 11 - 12
- 4.1 - 11





STA. 3+000 to STA. 3+200 -- 19 NOV 25
STA. 3+200 to STA. 8+000 -- 04 AUG 26
STA. 8+000 to STA. 13+000 -- 06 AUG 26
STA. 13+000 to STA. 16+500 -- 13 AUG 26
STA. 16+500 to STA. 23+700 -- 10 AUG 26
STA. 23+700 to STA. 25+200 -- 06 AUG 26
STA. 25+200 to STA. 25+778 -- 21 NOV 25

DISCLAIMER
This data is provided for general information only. It is not intended to be used for navigation. The government makes no representation or warranty as to the accuracy or completeness of the data provided. The government disclaims any liability for the use of this data for any purpose other than that for which it was collected, and any changes suffered are a result of errors, omissions, and omissions and does not warrant its accuracy.

U.S. ARMY CORPS OF ENGINEERS PHILADELPHIA DISTRICT	
Drawn By: E. Anthony	Surveyed By: E. Anthony
Plot Date: 11/11/25	Checked By: E. Anthony
Approved: Chief, Survey Section	

SALEM RIVER
STA. 0+000 to STA. 25+783
EXAMINATION

E-SA-13

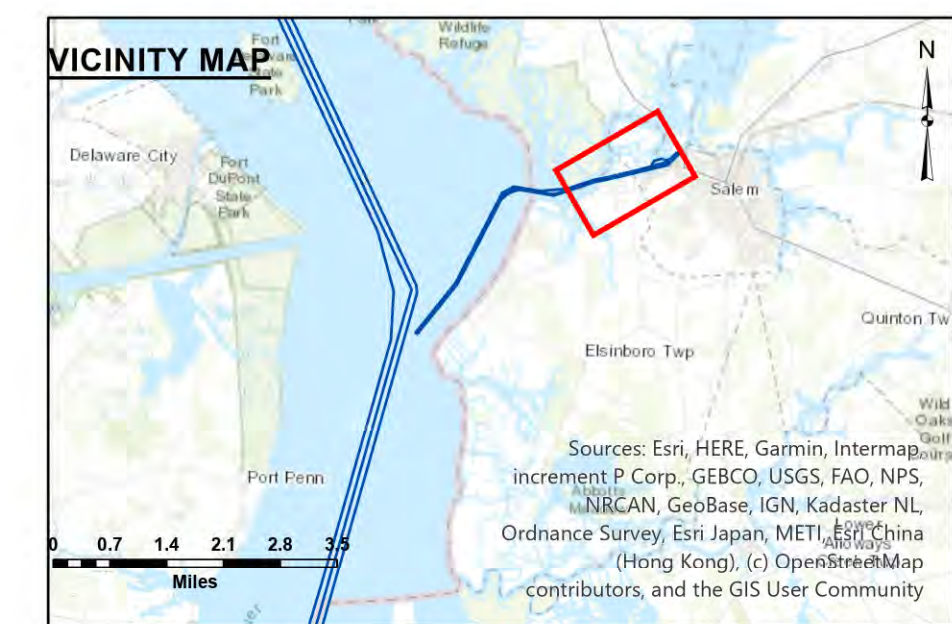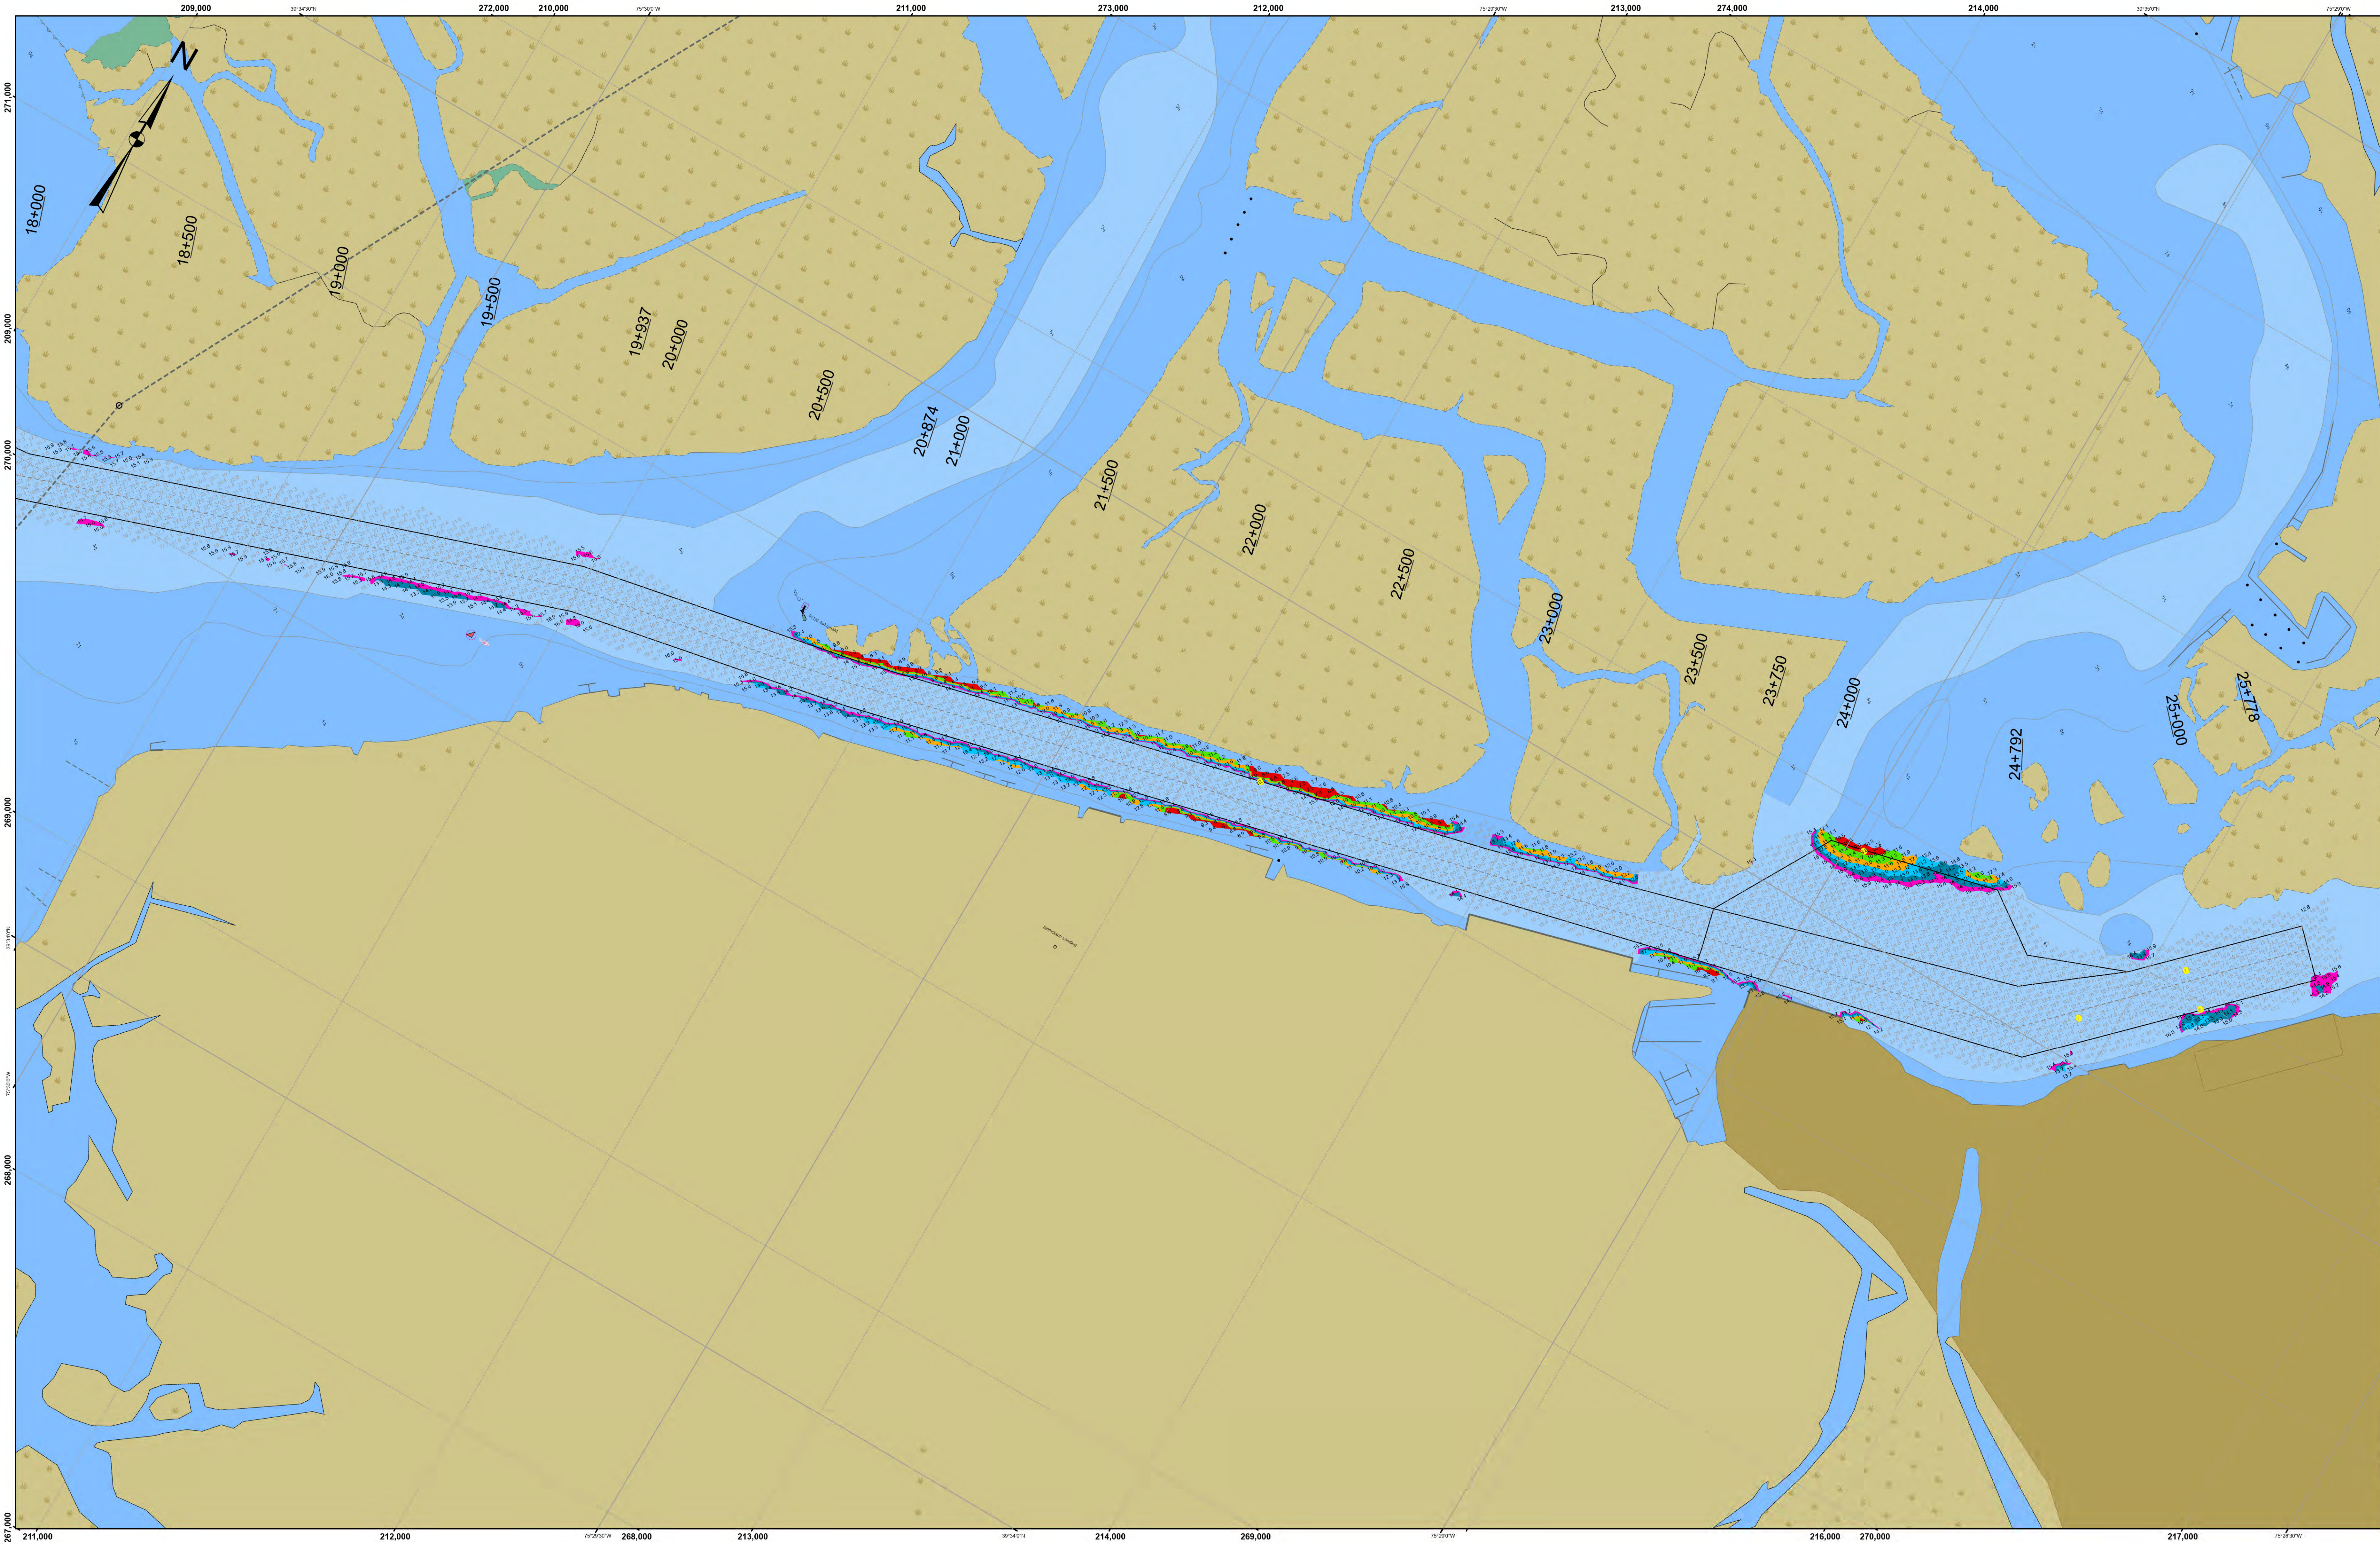


1. THIS SURVEY MEETS STANDARDS AS OUTLINED IN CORPS OF ENGINEERS' HYDROGRAPHIC SURVEY MANUAL EM1110-2-1003, DATED NOVEMBER 30, 2013 FOR NAVIGATION AND DREDGING SUPPORT SURVEYS.
2. HORIZONTAL REFERENCE - NAD 83, NEW JERSEY STATE PLANE, ZONE 2900, U.S. FOOT.
3. VERTICAL REFERENCE - MEAN LOWER LOW WATER, WHICH IS 2.97' BELOW N.A.V.D. 88.
4. GEOID 12B AND NOAA TIDAL EPOCH: 1983 - 2001 WERE USED. SOUNDINGS ARE EXPRESSED IN FEET AND TENTHS AND REFER TO MEAN LOWER LOW WATER.

5. HYPACK, INC. SOFTWARE WAS USED TO PERFORM THE SOUNDING SELECTION AND CONTOUR GENERATION.
6. THE INFORMATION DEPICTED ON THIS MAP REPRESENT THE RESULTS OF SURVEYS MADE ON THE DATES INDICATED AND CAN ONLY BE CONSIDERED AS INDICATING THE GENERAL CONDITIONS EXISTING AT THAT TIME.

7. THE POSITIONS OF THE AIDS TO NAVIGATION ARE PROVIDED FOR INFORMATION ONLY, AND SHOULD NOT BE USED FOR NAVIGATION.
8. THE LIMITS OF THE FEDERAL CHANNEL DEPICT THE MOST CURRENT CHANNEL FRAMEWORK AVAILABLE WHICH CAN ALSO BE DOWNLOADED HERE:
<http://navigation.usace.army.mil/Survey/Framework>

9. BASE MAPPING LINEWORK OR ORTHOPHOTOGRAPHY HAS BEEN COMPILED FROM A VARIETY OF SOURCES AND DATES AND IS INTENDED TO PORTRAY GENERAL CHARACTERISTICS OF THE SHORELINE AND OTHER FEATURES. TEMPORAL CHANGES MAY HAVE OCCURRED SINCE THIS DATA SET WAS COLLECTED AND SOME PARTS OF THE DATA MAY NO LONGER BE AN ACCURATE REPRESENTATION OF THE SURFACE CONDITIONS.

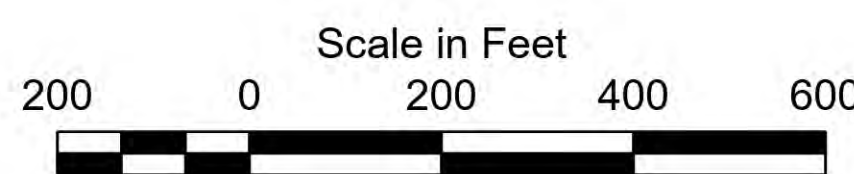

- Shoalest Sounding per Quarter
- CenterLine
- ToeLine
- StationLine
- 16 - 59.91
- 15 - 16
- 14 - 15
- 13 - 14
- 12 - 13
- 11 - 12
- 4.1 - 11



STA. 3+000 to STA. 3+200 -- 19 NOV 25
STA. 3+200 to STA. 8+000 -- 04 AUG 26
STA. 8+000 to STA. 13+000 -- 06 AUG 26
STA. 13+000 to STA. 16+500 -- 13 AUG 26
STA. 16+500 to STA. 23+700 -- 10 AUG 26
STA. 23+700 to STA. 25+200 -- 06 AUG 26
STA. 25+200 to STA. 25+778 -- 21 NOV 25

DISCLAIMER
This data is provided for general information only. It is not intended for use in navigation. The government makes no representation or warranty, expressed or implied, including but not limited to, accuracy, completeness, or fitness for a particular purpose, or makes no warranties, representations, or commitments of the data provided. The government disclaims any liability for the use of this data, and any damages suffered as a result of using, copying, or distributing the data provided.

Surveyed By:	U.S. ARMY CORPS OF ENGINEERS PHILADELPHIA DISTRICT		
Drawing No:			
Field By:	E. Anthony		
Plot Scale:			
Checked By:			
Approved:	Chief, Survey Section		

SALEM RIVER
STA. 0+000 to STA. 25+783
EXAMINATION

E-SA-13